

# MYOB Advanced

## Technical Release Notes

2019.1.0



# Contents

|   |    |
|---|----|
| Introduction  | 4  |
| Breaking Changes  | 4  |
| Customisation.....  | 4  |
| ISV Certification in the Customization Project Editor ..... | 4  |
| Automation Improvements .....                               | 6  |
| User-Defined Fields in a Customization Project .....        | 9  |
| Customization of Icon Sets .....                            | 11 |
| Platform API .....  | 11 |
| Fluent Business Query Language .....                        | 11 |
| LINQ Support.....   | 13 |
| Changes on the Processing Pages .....                       | 14 |
| Logging Improvements .....                                  | 16 |
| Web Services .....  | 17 |
| Contract-Based API Improvements.....                        | 17 |
| Changes in the License API Limits.....                      | 17 |
| Plug-In Development .....                                   | 19 |
| Other Improvements .....                                    | 20 |
| Application Customization .....                             | 20 |
| Platform API.....   | 20 |
| Integration Development.....                                | 20 |
| Upgrade Procedure .....                                     | 21 |
| Customizations and Integrations.....                        | 21 |
| Changes in the Translation of BQL Commands to SQL .....     | 21 |
| Changes Related to Fluent Business Query Language .....     | 21 |
| Changes Related to LINQ Support.....                        | 22 |

|   |     |
|---|-----|
| Screen-Based SOAP API Changes.....            | 25  |
| Organisation.....                             | 25  |
| Customer Management.....                      | 26  |
| Finance.....                                  | 27  |
| Order and Inventory Management.....           | 29  |
| Services.....                                 | 32  |
| Projects.....                                 | 33  |
| Configuration.....                            | 33  |
| Platform.....                                 | 33  |
| Other API Changes.....                        | 34  |
| Database Changes.....                         | 35  |
| Removed Screens.....                          | 35  |
| Removed Tables.....                           | 35  |
| Removed Columns.....                          | 35  |
| Modified Columns.....                         | 45  |
| Modified Indexes.....                         | 48  |
| Code Changes.....                             | 50  |
| Removed Data Access Classes.....              | 50  |
| Removed Graphs.....                           | 54  |
| Modified Interfaces and Abstract Classes..... | 55  |
| Modified Return Values.....                   | 58  |
| Removed Constants.....                        | 58  |
| Other Removed Classes.....                    | 61  |
| Other Breaking Methods.....                   | 127 |
| Other Breaking Fields.....                    | 309 |

# Introduction

Welcome to the 2019.1.0 release of MYOB Advanced. The purpose of this document is to provide essential information on the changes included in this release that affect organisations who are involved in developing reports, customisations and integrations for the MYOB Advanced system.

## Breaking Changes

Multiple changes have been made since the 2018.x releases that may affect reports, customizations, and integrations that were implemented by developers for the prior versions. The changes made in internal field or object names may break export and import scenarios. After the upgrade to MYOB Advanced 2019.1.0, review the scenarios if their screen IDs are listed below. If any command of the scenario exposes a yellow mark, verify and correct the object or field names, if required.

## Customisation

### ISV Certification in the Customization Project Editor

---

MYOB Advanced can now validate and help to certify an ISV solution that customizes Advanced in the following ways:

- Naming conventions for customization projects have been updated.
- Developers can now manage prefixes for most of the objects included in a customization project.
- A new type of project validation has been introduced that includes the following capabilities:
  - Checking of the database schema changes included in a customization project
  - Making sure that the customization project doesn't replace or modify files distributed as part of the standard Acumatica ERP application
  - Verification of the correspondence between the data types of a custom database column and all Data Access Classes (DACs) fields bound to it.

**Note:** These types of validations are applicable to ISV solutions only.

Developers can perform this type of validation from the Validations menu of the Customization Projects (SM204505) by selecting the Validate Highlighted Project or Validate Multiple Projects menu command.

- The validation of cache extensions performed during the publication of a project has been improved.
- Developers can now check for data consistency in DACs in published customization projects.
- Developers can now analyse custom files included in a customization project.
- Developers can now generate an Excel file that includes a list of solution objects and integration scenarios. For details, see [Generating an Excel Workbook](#).


## Managing Prefixes for Objects of a Customization Project

Developers can add a prefix that should be added to any object of the customization project. When validation of the customization project is performed, all objects are checked for the added prefix.

To manage prefixes for a customization project:

1. In the main menu of Customization Project Editor, **select File > Validate Project Prefix**. The Customization Project Prefix dialog box opens.
2. In the **Project Prefix** field, add the prefix for the customization project. The prefix is a combination of two to four characters that can be any of the 26 Latin letters (A through Z).
3. Click **Save**.

The developer can perform validation of the project's objects to check for the added prefix. To do this, in the Customization Project Prefix dialog box, click the Validate Project Items button. In the Validation Result area, the result of the validation appears. As an example, see the validation results in the screenshot below, where the CE prefix is added for the OnReleaseComplete project.

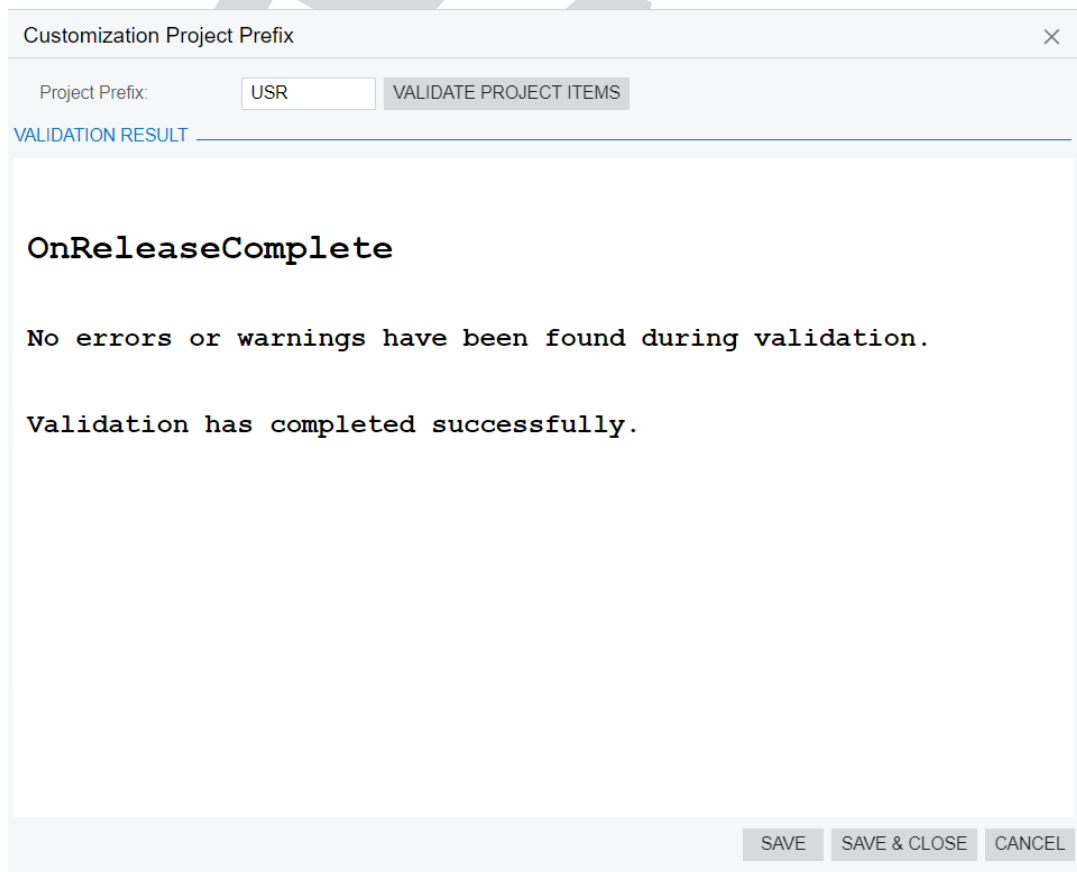


The screenshot shows a dialog box titled "Customization Project Prefix" with a close button (X) in the top right corner. Below the title bar, there is a "Project Prefix:" label followed by a text input field containing "USR" and a "VALIDATE PROJECT ITEMS" button. Below this is a section titled "VALIDATION RESULT" with a blue underline. The main content area displays the following text in a monospaced font: **OnReleaseComplete**, **No errors or warnings have been found during validation.**, and **Validation has completed successfully.** At the bottom right of the dialog box, there are three buttons: "SAVE", "SAVE & CLOSE", and "CANCEL".

## Validating Data Consistency in Published Customization Projects

Developers can verify the correspondence between the data types of DACs fields and field states generated by field attributes at run time. To perform this verification, the following options have been introduced:

- Verification that the data type of a DAC field matches with the field states generated at run time (the **DAC Field Types** menu command)
- Determination of whether there are any `PXAttributeFamilyAttribute` violations on a DAC field (the **DAC Attributes** menu command)
- Verification that DAC fields with lookup defined for a segmented key properly handle foreign key segments by means of `PXDimensionAttribute` (the **Lookup Definitions** menu command)

These menu commands are shown in the **Validations** menu of the Customization Projects (SM204505) form, as shown on the following screenshot.

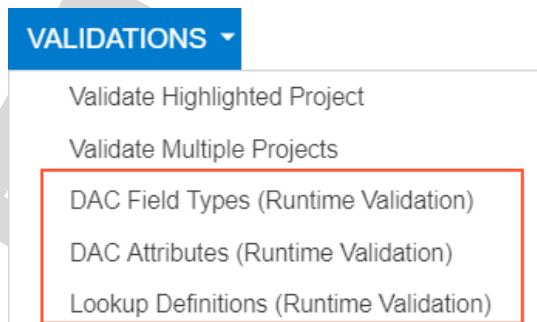

## Analysing Custom Files Included in the Customization Project

Developers can analyse custom files (assemblies) included in the customization project to verify that customization project doesn't replace or modify files distributed as part of the standard Acumatica ERP application. To do this, in the main menu of Customization Project Editor, select **Extension Library > Analyze Referenced Assemblies**. A CSV is downloaded to the developer's computer with all references made in the project's custom files.

## Generating an Excel Workbook

To generate the workbook containing a list of the project's objects in Excel format, in the main menu of the Customization Project Editor, the developer should select **File > Export ISV Solution Objects Workbook**. An XLSX file is automatically downloaded to the developer's computer.

The generated workbook contains a list of solution objects and integration scenarios grouped by the following types:

- Site map nodes
- Mobile site map nodes
- BLCs and BLC extensions
- DACs and DAC extensions
- Push notifications
- Import or export scenarios

## Automation Improvements


In the 2019.1.0 release, the capabilities for customising forms have been simplified and expanded with the ability to add conditions. Now there is no need to write code to

perform several types of customization, because these customizations can be performed from the new Screen Editor.

## Screen Editor

The Layout Editor has been renamed to the Screen Editor to reflect its expanded abilities. The **Properties** tab has been split into the following tabs (shown in the following screenshot):


- **Main Properties:** Lists properties that can be modified at the graph level
- **Layout Properties:** Lists properties that can be modified at the ASPX level

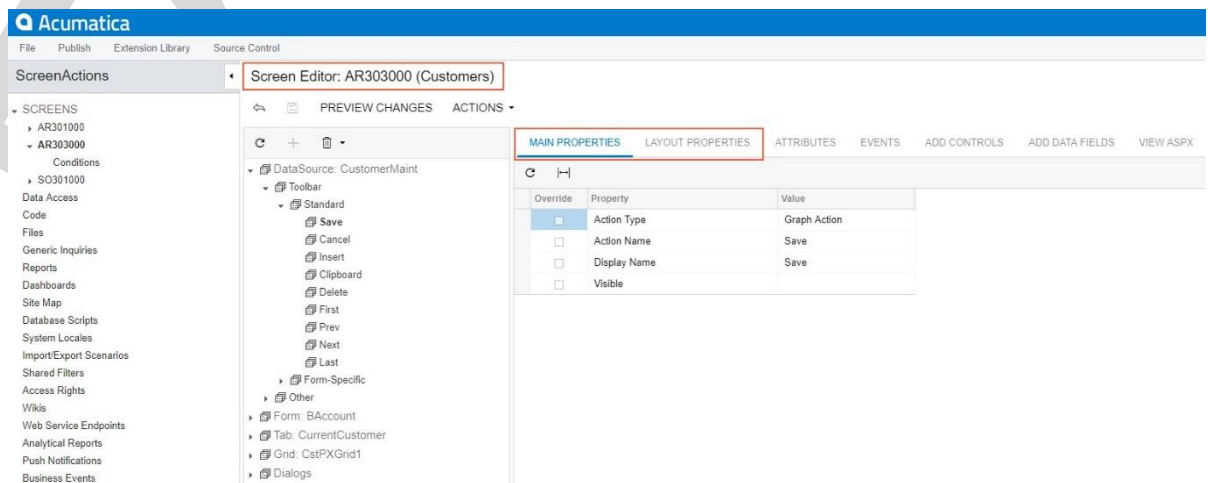

With the new layout, a user can easily review the actions available on the selected screen. The actions are conveniently grouped by toolbars on the screen, such as **Standard** and **Form-Specific**. Other available actions are collected under the **Other** group; see the following screenshot.

## Screen Editor: AR303000 (Customers)

PREVIEW CHANGES ACTIONS ▾

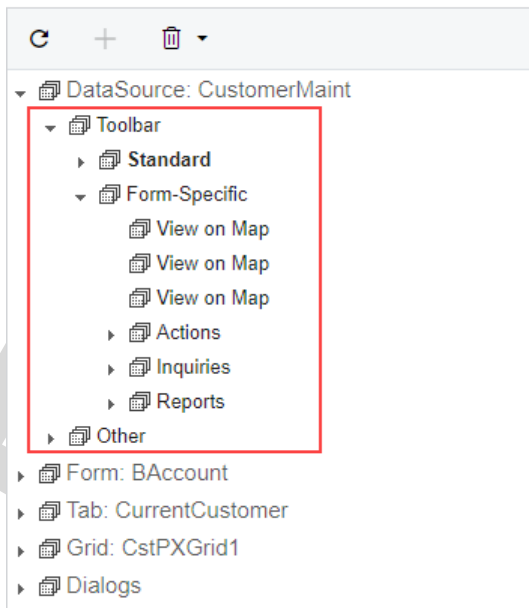

The list of available fields can be also viewed.



## New Means of Form Customization

The developer can now do the following when customizing forms:

- Review the list of actions for a screen and the list of fields
- Enable or disable, toggle the visibility of existing actions with or without conditions
- Enable or disable, toggle the visibility of existing fields with or without conditions

**Note:** Developers can enable actions and fields by using the Screen Editor only if these actions and fields are not disabled in source code of Acumatica ERP.

- Add new actions of any of the following types:
  - Run a report
  - Navigate to an existing record
  - Navigate to the form to create a new record
- Change the order of actions on the screen by dragging the actions in the actions tree of the Screen Editor (see the previous screenshot)

## User-Defined Fields in a Customization Project

In previous releases, user-defined fields were introduced and could be managed only within an instance of Acumatica ERP. Now these user-defined fields can be also managed in the Customization Project Editor, and then exported and imported with the help of customization packages.

Now the Customization Project Editor includes the new User-Defined Fields page, which is shown in the screenshot below. On this page, a developer can do the following:

- Load fields that have already been defined by users in an instance of Acumatica ERP.
- Add a new user-defined field based on existing attributes.
- View detailed information about a user-defined field.
- Edit or remove an existing user-defined field.


The screenshot shows the Acumatica interface with the 'User-Defined Fields' page open. The top navigation bar includes 'File', 'Publish', 'Extension Library', and 'Source Control'. The left sidebar lists various customization options, with 'User-Defined Fields' selected. The main content area features a table with columns: 'Attribute ID', 'Description', 'Screen ID', 'Last Modified By', and 'Last Modified On'. The table is currently empty, displaying a message: 'No records found. Try to change filter to see records here.' with a document icon and a close button. Above the table, there are icons for refresh, save, undo, delete, and add, along with buttons for 'RELOAD FROM DATABASE' and 'MANAGE'.

## Adding a User-Defined Field to the Customization Project

A developer can choose which fields defined in an instance are included in the customization project and manage on which screens these fields are displayed.


After users have defined some fields based on attributes, a developer opens the User-Defined Fields page of the Customization Project Editor. On this page, the developer loads the fields defined in the instance database or adds them manually by clicking the **Add New Record** button. An example of added user-defined fields is shown below.

### User-Defined Fields

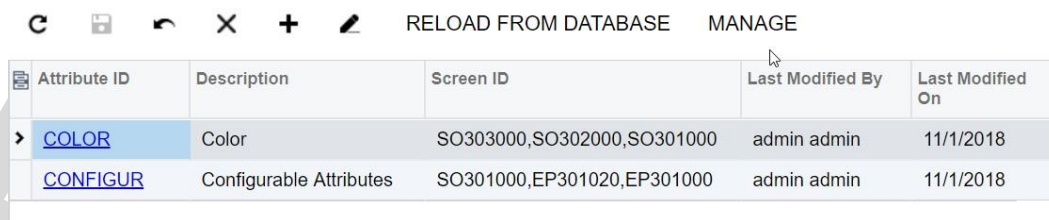

| Attribute ID             | Description             | Screen ID                  | Last Modified By | Last Modified On |
|--------------------------|-------------------------|----------------------------|------------------|------------------|
| > <a href="#">COLOR</a>  | Color                   | SO303000,SO302000,SO301000 | admin admin      | 11/1/2018        |
| <a href="#">CONFIGUR</a> | Configurable Attributes | SO301000,EP301020,EP301000 | admin admin      | 11/1/2018        |

After the fields have been added, the developer can edit the list of forms on which each field is displayed. To do this, the developer clicks an attribute ID in the list. In the **Edit Attribute** dialog box (see the following screenshot), which opens, the developer selects the desired forms by selecting the unlabelled check boxes in the rows of the form IDs.

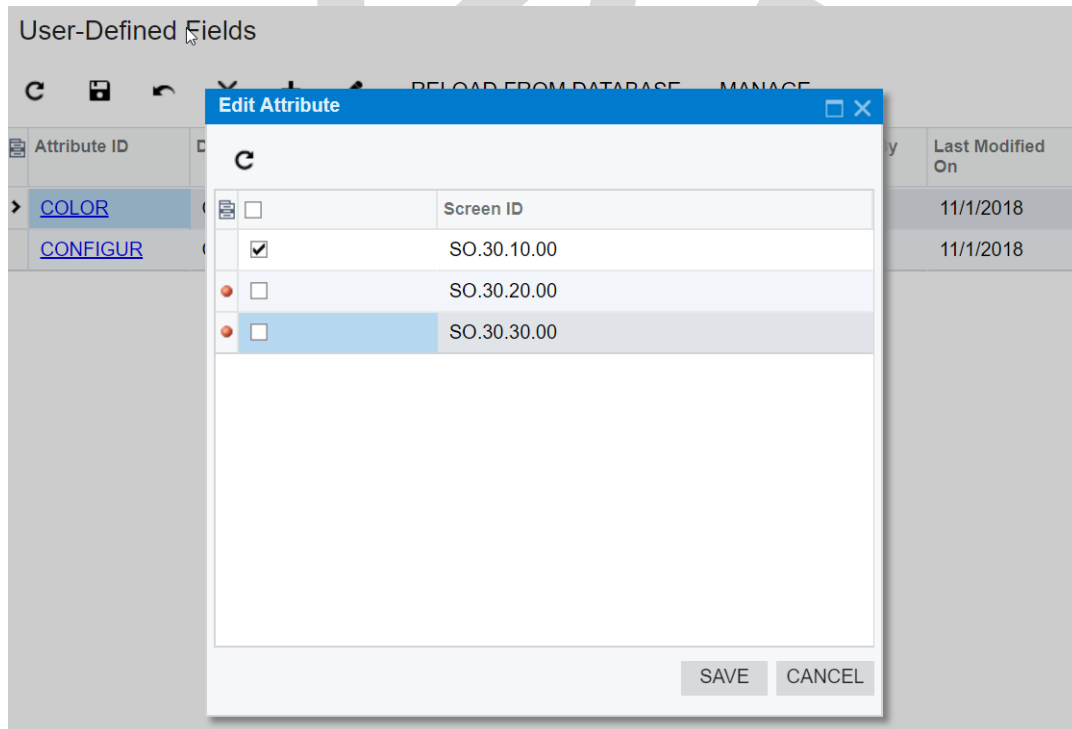

| Screen ID                           | Last Modified On |           |
|-------------------------------------|------------------|-----------|
| <input checked="" type="checkbox"/> | SO.30.10.00      | 11/1/2018 |
| <input type="checkbox"/>            | SO.30.20.00      | 11/1/2018 |
| <input type="checkbox"/>            | SO.30.30.00      |           |

After the forms have been selected, the developer clicks **Save** in the dialog box, which closes it, and then clicks **Save** on the page toolbar of the User-Defined Fields page. The selected form IDs are listed in the **Screen ID** column of the edited user-defined field, as shown in the following screenshot.

## User-Defined Fields

RELOAD FROM DATABASE    MANAGE

| Attribute ID             | Description             | Screen ID                  | Last Modified By | Last Modified On |
|--------------------------|-------------------------|----------------------------|------------------|------------------|
| <a href="#">COLOR</a>    | Color                   | SO301000                   | admin admin      | 11/1/2018        |
| <a href="#">CONFIGUR</a> | Configurable Attributes | SO301000,EP301020,EP301000 | admin admin      | 11/1/2018        |

## Customization of Icon Sets

In previous releases, icons could be customized by replacing the default Sprite icon sets. In MYOB Advanced 2019.1.0, a new way of customizing icons using Icon Fonts has been introduced: A developer can modify or create an Icon Font in the `WebSites\Pure\Site\fonts` folder of the Site project and modify the `font-awesome.css` file in the `WebSites\Pure\Site\content` folder of the Site project. The customization of icons using Sprite icon sets is no longer supported.

## Platform API

### Fluent Business Query Language

This release includes the fluent business query language (BQL), which is a new dialect of BQL that is more similar to SQL. Fluent BQL provides the following advantages as compared to the traditional BQL:

- It is easier to read and edit fluent BQL queries than traditional BQL queries because each section of a fluent BQL query does not depend on the others and can appear in only specific places of the query. Also, fluent BQL queries contain fewer commas and angle brackets and do not use numbered classes (such as `Select2` or `Select6`).
- A developer does not need to select a suitable class for the query (such as `PXSelectOrderBy<, >` or `PXSelectJoinOrderBy<, , >`); instead, the developer simply starts typing the command, and IntelliSense offers continuations that are relevant for the current query state.

The following example shows the declaration of the same data view in fluent BQL and in traditional BQL.

```
//Fluent BQL view declaration
public SelectFrom<
    PMProject>.
    LeftJoin<PMTask>.On<
        PMTask.projectID.IsEqual<PMProject.contractID>.
        And<PMTask.approverID.IsEqual<
            EmployeeActivitiesApprove.EPActivityFilter.approverID.FromCurrent>>>.
    Where<
        PMProject.isActive.IsEqual<True>.
        And<
            PMTask.taskID.IsNotNull.
            Or<PMProject.approverID.IsEqual<
                EmployeeActivitiesApprove.EPActivityFilter.approverID.FromCurrent>>
        >>.View PMProjectFBQLView;
```

DRAFT

```
//Traditional BQL view declaration
public PXSelectJoin<
    PMProject,
    LeftJoin<PMTask,
        On< PMTask.projectID,Equal<PMProject.contractID>,
        And<PMTask.approverID,Equal<
            Current<EmployeeActivitiesApprove.EPActivityFilter.approverID>
            >>>>,
        Where<PMProject.isActive, Equal<True>,
            And<
                Where<PMTask.taskID, IsNotNull,
                    Or<PMProject.approverID, Equal<
                        Current<EmployeeActivitiesApprove.EPActivityFilter.approverID>
                        >>>>> PMProjectBQLView;
```

Fluent BQL queries can be used instead of traditional BQL almost anywhere (such as in attributes, view declarations, and dynamic query building). However, fluent BQL cannot be used in the following cases:

- When the query is supposed to be parsed and modified by the direct use of reflection— that is, not by `BqlCommand.Decompose()`, but by `Type.GetGenericArguments()`
- When it is necessary to use separate BQL components, such as `Join`, `Where`, `Aggregate`, `OrderBy`, and `On` clauses

A developer can find all classes that can be used in fluent BQL in the `PX.Data.BQL.Fluent` and `PX.Data.BQL` namespaces.

## LINQ Support

In this release, developers can write requests to the database by using language-integrated query (LINQ) expressions. This approach can be used to define a query in the application code or to filter the data resulting from a business query language (BQL) query.

Developers can configure LINQ expressions in code by using any of the following variants of syntax:

- A query expression, which is shown in the following code.

```
using PX.Data.SQLTree;
using System.Linq;

ProductMaint graph = PXGraph.CreateInstance<ProductMaint>();
var goods = from p in graph.Select<Product>()
    where
        p.ProductCD.Length == 5 &&
        p.GroupMask.Length == 4 &&
        (p.WorkGroupID & 0b10) != 0
    select new
    {
        p.ProductID,
        p.ProductCD,
        p.ProductName,
        Len = p.ProductName.Length,
        BLen = SQL.BinaryLen( p.ProductName) + 1,
        p.GroupMask,
        p.WorkGroupID
    };
```

- Explicit (method-based) syntax. The following code is equivalent to the query expression shown above.

```
using PX.Data.SQLTree;
using System.Linq;


ProductMaint graph = PXGraph.CreateInstance<ProductMaint>();
var goods = graph.Select<Product>()
    .Where( p =>
        p.ProductCD.Length == 5 &&
        p.GroupMask.Length == 4 &&
        (p.WorkGroupID & 0b10) != 0)
    .Select( p => new
    {
        p.ProductID,
        p.ProductCD,
        p.ProductName,
        Len = p.ProductName.Length,
        BLen = SQL.BinaryLen(p.ProductName) + 1,
        p.GroupMask,
        p.WorkGroupID
    });
```

Because `PXResultset<T0>`, which is returned by the `Select` method of all `PXSelect` classes, now implements the `IQueryable<PXResult<T0>>` interface, developers can work with the data defined with a `PXSelect` query by using LINQ. The following code shows an example of additional filtering of data of BQL query by using LINQ.

```
//BQL statement
var Products = new PXSelect<Product,
    Where<Product.productCD, Like<string_D>>>(graph);
//Use of LINQ for the result of BQL query
var goods = Products.Select()
    .Where(p => p.GetItem<Product>().StockUnit == "item");
//Execution of the query
foreach (var good in goods) {
    var prod = good.GetItem<Product>();
}
```

## Changes on the Processing Pages

This release introduces a new UI of the processing pages, which is shown in the following screenshot. When a user starts a processing operation, the **Processing** dialog box opens, which displays the status of the processing.

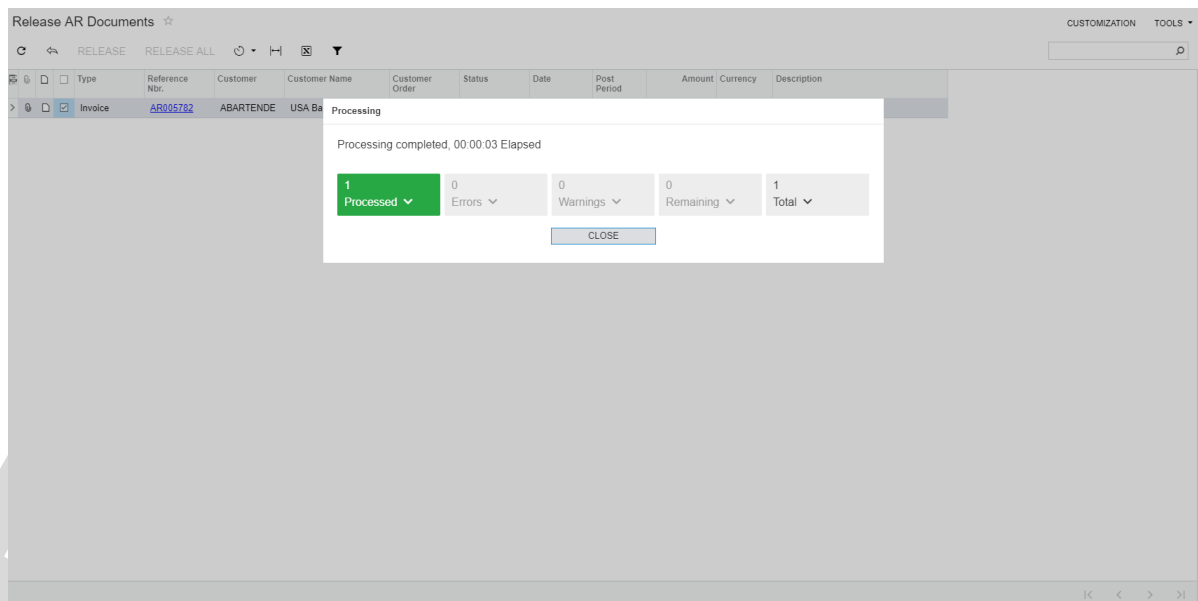

When a processing operation is started, all elements of the processing page become unavailable. If a developer needs to enable a button from the processing page during processing, the developer has to add this button to the processing dialog box.

## Adding a Button to the Processing Dialog Box

To add a button to the processing dialog box, a developer can use one of the following approaches:

- For the action that corresponds to the button, in the graph, set the value of the `VisibleOnProcessingResults` property of `PXButtonAttribute` or its descendant to `true`, as shown in the following code example.

```
[PXUIField(DisplayName = Messages.ShowDocuments)]
[PXButton(VisibleOnProcessingResults = true)]
public virtual IEnumerable showDocuments(PXAdapter adapter)
{
    ShowOpenDocuments(SelectedItems);
    return adapter.Get();
}
```

- In the ASPX file that corresponds to the page, set the value of the `VisibleOnProcessingResults` property of `PXDSCallbackCommand` to `True`, as shown in the following example.

```
<px:PXDataSource ID = "ds" Width="100%"
    runat="server" Visible="True" PrimaryView="Filter"
    TypeName="PX.Objects.FA.FAClosingProcess" >
    <CallbackCommands>
        <px:PXDSCallbackCommand Name = "showDocuments"
            VisibleOnProcessingResults="True"/>
    </CallbackCommands>
</px:PXDataSource>
```

## Turning Off the New UI of the Processing Pages

To turn off the new UI of the processing pages, a developer can do one of the following:

- To turn off the new UI for a particular page, override the `IsProcessing` property of the graph that corresponds to the page, as shown in the following code.

```
public override bool IsProcessing
{
    get { return false; }
    set { }
}
```

- To turn off the new UI for all processing pages, add the `ProcessingProgressDialog` key in the `appSettings` section of the `web.config` file of the application, as shown in the following example.

```
<add key="ProcessingProgressDialog" value="false" />
```

## Logging Improvements

---

In MYOB Advanced 2019.1.0, the logging system has been improved, as described in the following sections.

### Improved Performance

The performance of the logging system has been improved. Now the system does not collect the stack trace by default. For example, the following code does not collect the stack trace.

```
PXTrace.WriteInformation("The operation has been started.");
```

To collect the stack trace, a developer should call the `WithStack()` static method and specify the logging level at which the stack trace should be collected. In the following example, the stack trace is collected for the *Information* logging level.

```
PXTrace.WithStack().Information("The operation has been started.");
```

The `WithStack()` method affects the performance of the application.

### Collection of the Information about the Location of the Logged Message in Code

Developers can collect the following information about the location in the code where the writing to the log has been performed: the name of the method, the file name, and the line number in this file. To collect this information, developers should use the `WithSourceLocation()` static method and specify the logging level at which this information should be collected, as shown in the following example.

```
PXTrace.WithSourceLocation().Verbose("The operation has been started.");
```

The `WithSourceLocation()` method does not affect the performance of the application.

Developers can use both the `WithSourceLocation()` and the `WithStack()` methods, as shown in the following code example.

```
PXTrace.WithSourceLocation().WithStack().Verbose("The operation has been started.");
```



# Web Services

## Contract-Based API Improvements

With the *Default/18.200.001* contract-based API endpoint of MYOB Advanced 2019.1.0, developers can do the following):

- Insert an entire sales order in a shipment in one call. This way is faster than the insertion of the order lines one by one.
- Create a sales order with payments in one call. In this call, a developer can specify the payment method, cash account, and the payment amount for each payment. For the payments by credit card, a developer can specify the payment profile ID for the sales order.
- Insert separate lines of a purchase order or a purchase receipt in an AP bill. In Acumatica ERP 2018 R2, it was possible to insert only all lines of a purchase order or a purchase receipt in an AP bill.
- Create a purchase receipt with allocations in one call.
- Create a vendor with payment instructions in one call.
- Obtain attributes of cases.

## Changes in the License API Limits

Each MYOB Advanced license includes the limits on the number of web services API users, the number of concurrent API requests, and the number of web services API requests per minute. A developer can view the limits of the Acumatica ERP license on the License Monitoring Console form (SM604000), which is shown in the following screenshot.

The screenshot shows the 'License Monitoring Console' interface. At the top, there are navigation tabs: 'LICENSE', 'STATISTICS', 'WARNINGS', and 'CONSTRAINT HISTORY'. The 'LICENSE' tab is active. Below the tabs, there are two main sections: 'LICENSE DETAILS' and 'SYSTEM CONSTRAINTS'. The 'LICENSE DETAILS' section shows the following information:

|  |                  |
|--|------------------|
| License Status:                            | Valid            |
| * License Tier:                            | E Series, Tier 5 |
| Monthly Number of Commercial Transactions: | 500000           |
| Monthly Number of ERP Transactions:        | 10000000         |
| Database Storage Included (GB):            | 60               |
| Daily Commercial Transactions:             | 25000            |
| Daily ERP Transactions:                    | 500000           |
| Concurrent Users:                          | 1000             |

The 'SYSTEM CONSTRAINTS' section shows the following information:

|   |        |
|---|--------|
| Maximum Number of Web Services API Users:               | 50     |
| Maximum Number of Concurrent Web Services API Requests: | 20     |
| Maximum Number of Web Services API Requests per Minute: | 500    |
| Maximum Number of Fixed Assets:                         | 20000  |
| Maximum Number of Inventory Items:                      | 300000 |
| Maximum Number of Business Accounts:                    | 300000 |
| Maximum Number of Lines per Transaction:                | 3000   |
| Maximum Number of Serial Numbers per Document:          | 10000  |

The 'Maximum Number of Web Services API Requests per Minute' value of 500 is highlighted with a red box in the original image.

## Number of Requests per Minute

If the number of requests that have been done in a particular minute reaches 50 percent of the limit specified for the license, the subsequent requests during this minute are added to the queue and delayed for the following time: 60 seconds minus the number of seconds that have passed since the beginning of the current minute, divided by the remaining number of requests that can be processed in the minute.

For example, suppose that in a particular license, the limit of the number of web services API requests per minute is 50. Since the beginning of the current minute, if the system has already processed 25 requests in 40 seconds and the system receives another request, this request is delayed for  $(60-40) / 25$  seconds. After the delay, the request will be processed.

The request will be declined only if the number of requests in the queue is greater than 20, or the request remains in the queue for more than 10 minutes.

A developer can view the statistics of the delayed and declined requests on the **Statistics** tab of the License Monitoring Console form (SM604000), which is shown in the following screenshot.

License Monitoring Console ☆ CUSTOMIZATION TOOLS ▾

LICENSE **STATISTICS** WARNINGS CONSTRAINT HISTORY

| Month     | Commercial Transactions (% of Limit) | ERP Transactions (% of Limit) |
|-----------|--------------------------------------|-------------------------------|
| > 01-2019 | 4 (0%)                               | 230 (0%)                      |
| 12-2018   | 6 (0%)                               | 98 (0%)                       |
| 11-2018   | 1 (0%)                               | 33 (0%)                       |

|< < > >|

|< < > >| COMMERCIAL TRANSACTION DETAILS

| Date        | Commercial Transactions (% of Limit) | ERP Transactions (% of Limit) | Peak Number of Web Services API Requests per Minute (% of Limit) | * Declined API Requests (% of All) | * Delayed API Requests (% of All) |
|-------------|--------------------------------------|-------------------------------|--|------------------------------------|-----------------------------------|
| > 1/16/2019 | 0 (0%)                               | 0 (0%)                        | 0 (0%)   | 0 (0%)                             | 0 (0%)                            |
| 1/15/2019   | 2 (0%)                               | 94 (0%)                       | 0 (0%)   | 0 (0%)                             | 0 (0%)                            |
| 1/14/2019   | 1 (0%)                               | 46 (0%)                       | 0 (0%)   | 0 (0%)                             | 0 (0%)                            |
| 1/13/2019   | 0 (0%)                               | 0 (0%)                        | 0 (0%)   | 0 (0%)                             | 0 (0%)                            |
| 1/11/2019   | 0 (0%)                               | 19 (0%)                       | 0 (0%)   | 0 (0%)                             | 0 (0%)                            |

|< < > >|

## Number of Concurrent Requests

If the limit for the number of concurrent web services API requests has been reached, the next concurrent request is queued and is processed when any of the previous requests has completed.

The request will be declined only if the number of requests in the queue is greater than 20, or the request remains in the queue for more than 10 minutes. One queue is used for processing of the limit of the number of concurrent requests and the limit of the number of request per minute.

A developer can view the statistics of the delayed and declined requests on the Statistics tab of the License Monitoring Console form.

# Plug-In Development

This release includes multiple improvements to credit card processing, which can be incorporated in custom credit card plug-ins.

## Processing of Payments from New Credit Cards

In previous release, to be able to accept payments from new credit cards, a user had to first define a customer payment profile for the customer with this credit card. In MYOB Advanced 2019.1.0, information about a new credit card can be entered when a user processes a payment on the Payments and Applications form (AR302000).

To implement creation of a new credit card in a custom credit card plug-in, a developer needs add to the code of the plug-in the classes that implement the following interfaces: `ICCPProfileCreator`, `ICCTransactionGetter`, and `ICCHostedPaymentFormProcessor`.

## Synchronization of Credit Cards with the Processing Center

MYOB Advanced now supports the synchronization of credit cards registered in the Authorize.Net processing centre. A developer can implement the synchronization of credit cards registered in other processing centres with MYOB Advanced by adding the classes that implement the `ICCTransactionGetter` interface.

## Support of Webhooks

MYOB Advanced supports webhooks as a way to get response from the processing centre. If a developer needs to use webhooks, the developer should add the classes that implement the `ICCWebhookProcessor` interface, which manages webhooks, and the `ICCWebhookResolver` interface, which parses the information that comes from the processing centre through webhooks.

# Other Improvements

## Application Customization

---

- The MYOB Advanced Customization Engine now supports C# 7.0. Developers can use all features of C# 7.0 in customizations of MYOLB Advanced.
- The dashboard import and export scenario has been improved, so that when a new dashboard is added to a customization project, all the linked generic inquiries and wiki pages are also added or updated in the customization project. If any widget in the dashboard is linked to a page, it is added or updated in **Site Map** node chapter of the customization project.
- Developers can now use the RowPersisting and RowPersisted events and the InsertDocumentTransaction, InsertSplitTransaction, InsertRoundingTransaction, and InsertDepositChargeTransaction methods to customize the release of cash transactions.
- The names of the customization projects that contain periods and brackets were imported incorrectly in the Customization Project Editor. Now periods and brackets can be used in the names of the customization projects.

## Platform API

---

- The `Having<TCondition>` and `Aggregate<TFunctions, THaving>` classes have been added to the business query language (BQL). The `Having<TCondition>` class is equivalent to the SQL `HAVING` clause. In this class, you can specify the condition only by using fluent BQL.
- The `Power<Operand1, Operand2>` class, which is equivalent to the `POWER(Operand1, Operand2)` SQL function, has been added to the business query language.
- It is now possible to run a report with predefined report parameters (`Dictionary<string, string>`) and data to be used for the report generation (`PXResultSet`). A developer can use a `PXReportRedirectParameters` instance to pass the parameters and the data to a `PXReportRequiredException` instance to generate a report.

## Integration Development

---

- For forms that have multiple dependent sets of detail lines, such as the Projects form (PM301000), the performance of the data export has been improved. For these forms, all of the following processes work faster: the copying and pasting of an entity on a form, the export of an entity in XML format, the data retrieval through the export scenarios, the web services APIs, and the mobile API.

# Upgrade Procedure

## Customizations and Integrations

---

Multiple changes have been made in MYOB Advanced 2019.1.0 that may affect reports, customizations, and integrations that were implemented by developers for the prior versions. The complete list of the changes is provided in [Reference List of Changes](#). Additional recommendations about the possible approaches that a developer can use to prevent issues with the implemented solutions are described in the following sections.

To prevent breaking changes in the customizations, developers should do the following:

1. Analyze the customization projects.
2. Carefully read the list of breaking changes in this document.
3. Replace the changed objects with their alternatives.
4. If the objects used in the customization projects have been removed and no alternatives have been provided, consider creating new customization projects.

After an upgrade to MYOB Advanced 2019.1.0, to detect the changes that break existing customization projects, the developer can check the compatibility of the code included in all published customization projects with the original code.

**Note:** The validation that detects breaking changes is turned on by default in MYOB Advanced 2019.1.0.

## Changes in the Translation of BQL Commands to SQL

---

In MYOB Advanced 2019.1.0, the system converts all data queries, including the business query language (BQL) commands that the system processes during the generation of reports and of generic inquiry results, to SQL tree expressions. The system does not perform the direct conversion of BQL command to SQL text, as it did in previous versions. Because BQL commands no longer generate SQL text, the `IBqlCreator.Parse()` method, which was used to extract the SQL text from the BQL commands, has been removed.

If customization code implements any custom BQL classes, the developers of the code have to remove the implementation of the `IBqlCreator.Parse()` method from these classes.

## Changes Related to Fluent Business Query Language

---

The fluent business query language introduced in Acumatica ERP 2019 R1 uses the strongly typed declaration of class fields in data access classes (DACs). All types of the class fields in DACs of Acumatica ERP have been changed to `PX.Data.BQL.Bql[Type].Field<TSelf>`, where `Bql[Type]` is the class that corresponds to the type of the related property field of the DAC. For example, if the `ProductID` property field has the `int?` type, the `productID` class field has the `PX.Data.BQL.BqlInt.Field<productID>` type.

Because `PX.Data.BQL.Bql[Type].Field<TSelf>` implements the `IBqlField` interface, all class fields of the predefined DACs of Acumatica ERP can be used in traditional BQL. Therefore, you do not need to do any changes to the customization code, however you need to recompile it.

## Changes Related to LINQ Support

---

With LINQ in Version 2019 R1, you may not be able to filter records by using custom C# functions. For example, if your C# function filters records by a regular expression, which cannot be converted to standard SQL functions. If the system cannot convert a custom C# function in a LINQ statement, the system executes the data query in memory, which can lead to degradation of the application performance.

The system writes to the trace log about all situations when the system cannot convert the query to standard SQL functions. Therefore, we highly recommend that you investigate the trace log for such issues and fix the issues in one of the following ways:

- Remove the custom C# functions from the queries so that the full query is executed in the database.
- Append the `AsEnumerable()` method to the part of the query that can be converted to SQL, as shown in the following code, and add after it the conditions that include custom C# functions.

```
// MyHelpers.IsHighPriority is a custom function
var results = graph
    .Select<CRCCase>()
    .OrderByDescending(c => c.Date).AsEnumerable()
    .Where(c => MyHelpers.IsHighPriority(c));

foreach (CRCCase case in results)
{
    ...
}
```

## Changes Related to the Support of Different Financial Calendars

In this release, users can implement multiple legal entities, which have different fiscal year-end dates, within the same tenant.

In previous versions of MYOB Advanced, the `TranPeriodID` field stored the financial period ID that was defined by the document date. Now the `TranPeriodID` field stores the master period ID that corresponds to the `FinPeriodID` field (which contains the financial period defined by the document date). The master period ID is calculated by using both the financial period ID and the branch ID. The `PeriodIDAttribute` class and its descendants implement the business logic of the `TranPeriodID` and `FinPeriodID` fields. To implement the business logic of multiple financial calendars in master-detail documents, a developer also needs to use the `DocumentWithLinesGraphExtension` generic graph extension.

## Other Code Changes Related to Financial Management

The following classes and methods, which were used in cash management, have been removed as obsolete:

- `PX.Objects.AR.AR DunningLetterPrint.DetailsResult.Copy(PXGraph, AR DunningLetter, Customer)`
- `PX.Objects.CA.AddDetailFilter`
- `PX.Objects.CA.CABatch.workgroupID`
- `PX.Objects.CA.CABatch.WorkgroupID`
- `PX.Objects.CA.CARecon.LineCntr`

- PX.Objects.CA.CARecon.lineCntr
- PX.Objects.CA.caCredit
- PX.Objects.CA.CashTranIDAttribute.IsMigrationModeEnabledSetupField
- PX.Objects.CA.CashTranIDAttribute.IsMigrationModeEnabled
- PX.Objects.CA.CashTranIDAttribute(Type)
- PX.Objects.CA.Messages.DocumentCount
- PX.Objects.CA.Messages.AutoReconcile
- PX.Objects.CA.Messages.ParameterShouldNotNull
- PX.Objects.CA.Messages.IsNotBqlField
- PX.Objects.CA.CATranEntry.viewBatch
- PX.Objects.CA.CATranEntry.ViewBatch()
- PX.Objects.GL.GLTranDoc.AccountBranchID
- PX.Objects.GL.GLTranDoc.accountBranchID

## Code Changes Related to Inventory and Order Management

Note the following about the code changes that are related to inventory and order management:

- The LockSitePICountEntry property of the PX.Objects.IN.INSite DAC has been removed. The new UnlockSiteOnCountingFinish property of the
- PX.Objects.IN.INPIClass DAC can be used instead of the removed DAC. The new property implements inverse logic.
- PX.Objects.IN.PXMassProcessException has been marked as obsolete in Acumatica ERP 2018 R1 and is removed in Version 2019 R1.
- PX.Objects.Common.PXMassProcessException or a custom exception type can be used instead.
- PX.Objects.PO.POItemCostManager.ConvertCury(PX.Data.PXGraph,System.String, System. has been marked as obsolete in Acumatica ERP 5.3 and is removed in Version 2019 R1. Instead, PXCurrencyAttribute should be used for currency conversion.
- INLotSerClass.LotSerNumVal and InventoryItem.LotSerNumVal have been moved to the INLotSerClassLotSerNumVal and InventoryItemLotSerNumVal DACs, respectively. The start value for the auto-incremented numbering segment can be obtained by invocation of the INLotSerialNbrAttribute.ReadLotSerNumVal(PXGraph,PXResult<InventoryItem, INLotSerClass>) static method.
- The LSSelect<,,>.AvailabilityFetch method has been marked as obsolete in a previous version and is removed in Version 2019 R1.
- The set of parameters of the SO.SOShipmentEntry.PostShipment method has been changed. Now the method accepts INTransferEntry and INIssueEntry.

## Code Changes Related to Project Accounting

The AmountInBaseCury field of the PMChangeOrderLine DAC has been renamed to AmountInProjectCury.

## Other Code Changes in Platform

The `PX.DataSync.IEnumerableExstension` class was renamed to `PX.DataSync.IEnumerableExtension` and moved to the `PX.DataSync.Core.dll` library.

## Changes to the Default/18.200.001 Endpoint

In the Default/18.200.001 endpoint, mappings of the Amount fields of the entities related to project accounting have been changed: Now these fields are mapped to the internal `CuryAmount` fields.

DRAFT



# Screen-Based SOAP API Changes

## Organisation

The following fields and containers have been renamed:

| Form  | Old Name   | New Name  |
|---|--|---|
| Buildings<br>(CS205010)   | Branch.BranchID  | Branch.Branch   |
| Opportunities<br>(CR304000)   | DetailsPersonalDataPrivacy   | ContactInfoPersonalDataPrivacy  |
| Projects<br>(PM301000),<br>Project  | ApprovalDetails.Approver,<br>ApprovalDetails.ApproverName,   | ApprovalDetails.ApproverID,<br>ApprovalDetails. AssignedTo,   |
| Approve<br>(EP303010)   | ApprovalSummary.DateAssigned,<br>ApprovalSummary.Date  | ApprovalSummary.AssignmentDate,<br>ApprovalSummary.ApprovalDate   |
| Release<br>Equipment<br>Time Cards<br>(EP505020)  | TimeCards.Date   | TimeCards.ApprovalDate  |
| Sales Orders<br>(SO301000),<br>Requests<br>(RQ301000),<br>Requisitions<br>(RQ302000),<br>Purchase<br>Orders<br>(PO301000),<br>Expense Claim<br>(EP301000),<br>Employee<br>Time Card<br>(EP305000),<br>Transactions<br>(CA304000),<br>Bills and<br>Adjustments<br>(AP301000) | ApprovalDetails.Approver,<br>ApprovalDetails.ApproverName,<br>ApprovalDetails.ApprovedByName,<br>ApprovalDetails.Date,<br>ApprovalDetails.DateAssigned | ApprovalDetails.ApproverID,<br>ApprovalDetails. AssignedTo,<br>ApprovalDetails.ApprovedBy,<br>ApprovalDetails.ApprovalDate,<br>ApprovalDetails.AssignmentDate |

| Form   | Old Name  | New Name  |
|--|---|---|
| Quotes (PM304500),<br>Pro Forma Invoices (PM307000),<br>Change Orders (PM308000),<br>Expense Receipt (EP301020),<br>Equipment Time Card (EP308000),<br>Sales Quotes (CR304500),<br>Payments and Applications (AR302000),<br>Cash Sales (AR304000),<br>Checks and Payments (AP302000),<br>Quick Checks (AP304000) | ApprovalDetails.ApprovedByName,<br>ApprovalDetails.Date | ApprovalDetails.ApprovedBy,<br>ApprovalDetails.ApprovalDate |

The following fields and containers have been removed:

- On Privacy Tools Audit (GD101010):
  - Log.KeyUIKey
- On Approval Maps (EP205015):
  - RuleActionsApprover
  - RuleActionsEmployeeOwnerID
  - RuleActions
- On Customer Management Preferences (CR101000):
  - GeneralSettingsMiscellaneousSettings.ShowAuthorEmailAddress

**Note:** The **Show Author's Email Address** check box duplicated the logic implemented on the System Email Account form (SM204002).

## Customer Management

- On the Business Accounts (CR303000) form, the following changes have been made:
  - The DetailsMainContact.JobTitle field has been removed.
  - The DeliverySettingsShippingContact.JobTitle field has been removed.
  - The DetailsCRMMainContact container has been renamed to DetailsMainContact.
- On the Opportunities (CR304000) form, the ContactInfoContactInformation.Position field has been removed.

- On the Opportunities BI (CR3040BI) form, the Result.Position field has been removed.
- On the Opportunities (CR3040PL) form, the Result.Position field has been removed.
- On the Opportunities Products (CR3042BI) form, the Result.Position field has been removed.

## Finance

The following fields and containers have been renamed:

| Form   | Old Name  | New Name   |
|--|---|--|
| Invoices and Memos (AR301000),<br>Deferral Schedule (DR201500),<br>Journal Transactions (GL301000),<br>Invoices (SO303000) | Project   | Project/Contract   |
| Vendor Summary (AP401000),<br>Vendor Details (AP402000)  | Selection.ByFinancialPeriod                           | Selection.Period   |
| Customer Summary (AR401000),<br>Customer Details (AR402000)  |   |  |
| Release AP Retainage (AP510000)  | Selection.ShowBillsWithOpenBalance, Documents.Project | Selection.ShowLinesWithOpenBalance, Documents.ProjectProjectID |
| Payments and Applications (AR302000)   | PaymentSummary.ServiceContractNbr                     | PaymentSummary.ServiceContractID                               |
| Account Details (GL404000)   | SummaryByPeriod.Period                                | SummaryByPeriod.PeriodID                                       |

| Form                                   | Old Name   | New Name   |
|--|--|--|
| Reclassify Transactions (GL506000)     | GLTranForReclass.PostPeriod                                      | GLTranForReclass.PeriodID  |
| Cash Management Preferences (CA101000) | GeneralSettingsReconciliationSettings.SkipReconciledTransactions | GeneralSettingsReconciliationSettings.SkipReconciledTransactionsInMatching |

- On the Bills and Adjustments (AP301000) form, the following changes have been made:
  - The LinkLine container has been renamed to LinkLineReceipt.
  - The LinkLineSelected container has been renamed to LinkLineOrder.
  - The DocumentSummary.LCEnabled field has been removed.
  - The Currency, TotalAmt, UnbilledBalance fields of the AddPOReceipt container have been removed.
  - The Currency, Amount, UnbilledAmount fields of the AddReceiptLine container have been removed.
- On the Checks and Payments (AP302000) form, the RemittanceInformationRemittanceContact.BusinessName field has been removed.
- On the Vendors (AP303000) form, the Contacts.Position field has been removed.
- On the Quick Checks (AP304000) form, the RemittanceInformationRemittanceContact.BusinessName field has been removed.
- On the Invoices and Memos (AR301000) form, the following changes have been made:
  - The BillingAddressBillingContact.BusinessName field has been removed.
  - The BillingAddressPrintAndEmailOptions container has been removed.
  - The BillingAddressBillingAddress container has been removed.
  - The BillingAddressBillingContact container has been removed.
- On the Customers (AR303000) form, the Contacts.Position field has been removed.
- On the Cash Account form (CA2020PL), the following changes have been made:
  - The Result.DescriptionCashAccountCashAccountCDDescription field has been removed.
  - The Result.DescriptionCashAccountDescr field has been removed.
- On the Cash Sales (AR304000) form, the following changes have been made:
  - The BillingAddressBillingContact.BusinessName field has been removed.
  - The BillingAddressPrintAndEmailOptions container has been removed.
  - The BillingAddressBillingAddress container has been removed.
  - The BillingAddressBillingContact container has been removed.
- On the Avalara Integration (TX102000) form, the following changes have been made:
  - The Avalara Integration (TX102000) form has been renamed to Tax Providers.
  - The ConnectionSettings container has been removed.
  - The TaxCalculation container has been removed.

- The TaxCalculationBranchCompanyCodeMapping container has been renamed to CompanyCodeMapping.
- On the Tax Bills and Adjustments (TX303000) form, the DocumentSummary.LCEnabled field has been removed.
- On the Prepare Payments (AP503000) form, the following changes have been made:
  - The DocumentsToPay.NoteText field has been removed.
  - The Exceptions.NoteText field has been removed.
- On the Generate FA Calendars form (FA501000), the Parameters.GenerateThroughYear field has been removed.
- On the Reconciliation History by Account form (FA620020), the Parameters.Ledger field has been removed.

## Order and Inventory Management

---

- On the Sales Orders (SO301000) form, the elements have been renamed as follows:
  - RecalcAvalaraAction to RecalculateExternalTaxesAction
  - RecalcAvalara to RecalculateExternalTaxes
  - RecalcAvalaraTax to RecalcExternalTax
  - TotalsFreightInfo.Freight to TotalsFreightInfo.FreightPrice
  - TotalsFreightInfo.PremiumFreight to TotalsFreightInfo.PremiumFreightPrice
- On the Sales Orders (SO301000) form, the following elements have been removed:
  - FinancialSettingsBillToContact.BusinessName
  - ShippingSettingsShipToContact.BusinessName
  - RecalcAvalaraAction
  - RecalAvalar
- On the Shipments (SO302000) form, the ShippingSettingsShippingInformation.FreightAmt field has been renamed to ShippingSettingsShippingInformation.FreightPrice.
- On the Shipments (SO302000) form, the following fields have been removed:
  - ShippingSettingsShipToContact.BusinessName
  - PackagesContentsOfSelectedPackage.ShipmentLineNbr
- On the Shipments (SO3020PL) form, the Result.FreightAmt field has been renamed to Result.FreightPrice.
- On the Invoices (SO303000) form, the fields have been renamed as follows:
  - Totals.Freight to Totals.FreightPrice
  - Totals.PremiumFreight to Totals.PremiumFreightPrice
  - FreightDetails.FreightAmt to FreightDetails.FreightPrice
  - FreightDetails.PremiumFreightAmt to FreightDetails.PremiumFreightPrice
  - FreightDetails.TotalFreightAmt to FreightDetails.TotalFreightPrice
  - TotalsCashDiscountInfo to FinancialDetailsCashDiscountInfo
  - PaymentInformation.PaymentTotal to PaymentInformation.CuryPaymentTotal
- On the Invoices (SO303000) form, the following containers have been removed:
  - BillingAddressBillToAddress
  - BillingAddressBillToContact

- Totals
- TotalsPaymentTotal
- The FinancialDetails container has been removed and split into FinancialDetailsLinkToGL, FinancialDetailsAssignedTo, FinancialDetailsPrintAndEmailOptions, FinancialDetailsTaxInfo.
- On the Invoices (SO303000) form, the following fields have been moved to the TotalsPaymentTotal container:
  - Totals.PaymentTotal
  - Totals.CapturedAmount
- On the Landed Cost Codes (PO202000) form, the LandedCostCode.ApplicationMethod field has been removed.
- On the Landed Cost Codes (PO2020PL) form, the Result.ApplicationMethod field has been removed.
- On the Purchase Orders (PO301000) form, the following changes have been made:
  - VendorInfoVendorContact.BusinessName has been removed.
  - ShippingInstructionsShipToShipToContact.BusinessName has been removed.
  - DocumentDetails.CompletePOLine has been renamed to DocumentDetails.ClosePOLine.
  - DocumentDetails.ReceivedAmt has been removed.
  - OtherInformation.OpenQuantity has been renamed to OtherInformation.UnbilledQuantity.
  - OtherInformation.OpenAmount has been renamed to OtherInformation.UnbilledAmount.
  - NewVendor has been removed.
  - EditVendor has been removed.
- On the Purchase Orders (PO30100PL) form, the Result.OpenQuantity field has been removed.
- On the Purchase Receipts (PO302000) form, the following fields have been removed:
  - DocumentSummary.Currency
  - DocumentSummary.CuryViewState
  - DocumentSummary.DiscountTotal
  - DocumentSummary.VATExemptTotal
  - DocumentSummary.VATTaxableTotal
  - DocumentSummary.TotalAmt
  - DocumentSummary.ControlAmt
  - DocumentDetails.ManualCost
  - DocumentDetails.ExtCost
  - DocumentDetails.DiscountPercent
  - DocumentDetails.DiscountAmount
  - DocumentDetails.DiscUnitCost
  - DocumentDetails.ManualDiscount
  - DocumentDetails.DiscountCode
  - DocumentDetails.DiscountSequence
  - DocumentDetails.Amount
  - DocumentDetails.TaxCategory
  - AddPurchaseOrderPOSelection.AnyCurrency
  - AddReceiptLine.CuryUnitCost

- AddReceiptLine.CuryExtCost
- AddPurchaseOrder.ReceivedAmt
- AddPurchaseOrder.OpenAmt
- LandedCosts.LandedCostTranID
- LandedCosts.PORceiptType
- LandedCosts.LineNbr
- LandedCosts.Description
- LandedCosts.VendorRef
- LandedCosts.Location
- LandedCosts.APBillDate
- LandedCosts.TaxCategory
- LandedCosts.Terms
- LandedCosts.InventoryID
- LandedCosts.APDocType
- LandedCosts.INDocType
- LandedCosts.PostponeAPBillCreation
- On the Purchase Receipts (PO3020PL) form, the following fields have been removed:
  - Result.TotalAmt
  - Result.TaxTotal
- On the Release Purchase Receipts (PO501000) form, the PORceipts.TotalAmt field has been removed.
- On the Release Landed Costs (PO506000) form, the following fields have been removed:
  - Documents.ReceiptNbr
  - Documents.ReceiptTotalAmt
  - Documents.LandedCostTotalBaseCurrency
  - Documents.LandedCostRecords
- On the Requests (RQ301000) form, the following fields have been removed:
  - ShippingInstructionsShipToShipToContact.BusinessName
  - VendorInfoVendorContact.BusinessName
- On the Requisitions (RQ302000) form, the following fields have been removed:
  - ShippingInstructionsShipToShipToContact.BusinessName
  - VendorInfoVendorContact.BusinessName
  - VendorAddressVendorContact.BusinessName
- On the Bidding Responses (RQ303000) form, the VendorInfoVendorContact.BusinessName field has been removed.
- On the Complete Bidding (RQ503000) form, the following fields have been removed:
  - VendorAddressVendorAddressOverride.BusinessName
  - VendorAddressVendorAddressOverride.Attention
- On the Non-Stock Items (IN202000) form, CompletePOLine of the GeneralSettingsItemDefaults container has been renamed to ClosePOLine.
- On the Availability Calculation Rules form (IN201500), the Schemes.IncludeQtyOnReturns field has been renamed to Schemes.IncludeQtyOnSalesReturns.
- On the Physical Inventory Review form (IN305000), the PhysicalInventoryDetails.ExtVarianceCost field has been renamed to PhysicalInventoryDetails.EstimatedExtVarianceCost.

- On the Inventory Allocation Details form (IN402000), the AllocationDetails container has been renamed to ItemPlansAllocationDetails.
- On the Inventory Transaction Details form (IN404000), the Selection.ByFinancialPeriodWithoutRunningValues form has been renamed to Selection.ByFinancialPeriod.
- On the Prepare Physical Count form (IN504000), the following containers have been renamed:
  - WarehouseInventorySelection to Preview
  - Details to PreviewDetails
  - LocationSelection to LocationSelectionSelectedLocations
- On the Warehouses form, the WarehouseSummary.FreezeInventoryWhenPICountIsInDataEntryState field has been removed.
- The following fields have been removed:
  - POOrder.OpenOrderQty
  - CuryOpenOrderTotal
  - openOrderTotal
  - POLine.openAmt
  - curyOpenAmt
  - PORceipt.curyVatExemptTotalc
  - curyVatTaxableTotal
  - payToVendorID
  - PORceiptLine.discountID
  - taxCategoryID
  - curyExtCost
  - extCost
  - curyUnitCost
  - unitCost
  - curyMultExtCost
  - discPct
  - discAmt
  - manualDisc
- The following DACs have been removed:
  - PORceiptLineR
  - POLineAP
  - LandedCostTran
- The following attributes have been removed:
  - PORceiptTaxAttribute
  - PORceiptUnbilledTaxAttribute
- Signature of the PX.Objects.TX.TaxBaseAttribute::CalcDocTotals method has been changed.

## Services

---

- On the Manufacturer Models form (FS204800), Result.ManufacturerModelID has been renamed to Result.ManufacturerModel.
- On the Equipment Summary form (FS400200), Result.ManufacturerModelID has been renamed to Result.ManufacturerModel.



- On the Model Equipment and Component Summary form (FS400400), Result.ManufacturerModelID has been renamed to Result.ManufacturerModel.
- On the Component Summary (FS400700) form, Result.EquipmentDescription has been renamed to Result.Description.
- On the Appointment Details form (FS400500), Result.SuspendedTargetEquipmentID has been removed.
- On the Service Order Details form (FS401000) form, Result.SuspendedTargetEquipmentID has been removed.
- On the Non-Stock Items form (IN202000), ServiceManagement.OpenNoteWhenServiceIsSelected has been removed.

## Projects

---

- On the Projects (PM301000) form, the following fields have been removed:
  - SummaryBILLTOCONTACT.BusinessName
  - Commitments.OpenQuantity
- On the Labour Cost Rates form (PM209900), Positions.HourlyRate has been renamed to Positions.Rate.
- On the Change Orders form (PM308000), Commitments.AmountInBaseCurrency has been renamed to Commitments.AmountInProjectCurrency.
- On the Pro Forma Invoices form (PM307000), the following containers have been removed:
  - BillingSettingsBILLTOADDRESS
  - BillingSettingsBILLTOCONTACT

## Configuration

---

- On the Enable/Disable Features (CS100000) form, the features in the GeneralSettings container have been renamed as follows:
  - AvalaraTaxIntegration to ExternalTaxCalculationIntegration
  - AddressValidation to AddressValidationIntegration
- On the Countries/States (CS204000) form, in the CountrySummary container, the AddressVerificationService field has been renamed to AddressVerificationPlugin.

## Platform

---

- On the Running Processes (SM201530) form, the following containers have been renamed:
  - Filter\_ to RUNNINGPROCESSES
  - Operations to RUNNINGPROCESSESOperations
- On the Customization Projects (SM204505) form, the actions have been renamed as follows:
  - PublishToMultipleCompaniesDatabaseOnlyApplyDatabaseChangesSkipWebsiteUpdate to PublishToMultipleTenantsDatabaseOnlyApplyDatabaseChangesSkipWebsiteUpdate
  - PublishToMultipleCompanies to PublishToMultipleTenants
- On the Edit Project Items (SM204510) page of the customization project editor, the following elements have been removed:

- SourceControlSetup container
  - CONFIGUREActionTFS action
- The following elements have been moved from the Request Profiler (SM205070) form to the Running Processes (SM201530) form:
  - ActionGC action
  - ActionStackTrace action
  - MemoryUsage container (renamed to RESOURCEUSAGEMEMORYUSAGE)
  - ActiveThreads container
- On the Web Service Endpoints (SM207060) form, the following fields have been removed:
  - ActionProperties.Active
  - EntityProperties.Active
- On the Business Events (SM302050) form, the PopulateFields container has been removed.
- On the License Monitoring Console (SM604000) form, the following objects have been removed:
  - The DatabaseSpaceIncludedGB field in LicenseLicenseMonitoringConsoleLicenseDetails
  - The LicenseLicenseMonitoringConsoleSystemRecommendations container
- On the License Monitoring Console (SM604000) form, the following fields have been renamed:
  - StatisticsDaily.PeakNumberOfWebServicesAPIRequestsPerHourOfLimit to StatisticsDaily.PeakNumberOfWebServicesAPIRequestsPerMinuteOfLimit
  - StatisticsDaily.DeclinedNumberOfWebServicesAPIRequests to StatisticsDaily.DelayedAPIRequestsOfAll
- On the Generic Inquiries (SM208000) form, the following actions have been removed:
  - MoveUpResults
  - MoveDownResults

## Other API Changes

---

The following list includes comments to the API changes listed in the sections below:

- The ExtCost field of the PORceiptLine DAC has been removed. The PORceiptLine.TranCost field can be used instead. This field has a close meaning but not exactly the same.
- PXOrderedSelect family has been moved from PX.Objects to PX.Data.
- PX.Data.PXNoteAttribute::UpdateNoteRecord method has been changed: popupText parameter has been added.
- The Append and Prepend methods of the PX.Common.EnumerableExtensions class have been renamed to AppendObsolete and PrependObsolete, respectively. The methods are marked as obsolete.

# Database Changes

## Removed Screens

---

None

## Removed Tables

---

- POReceiptDiscountDetail
- POReceiptTax
- POReceiptTaxTran
- SOInvoiceDiscountDetail
- AUScreenConditionFilterState
- AUScreenInquiryParamState
- AUScreenInquiryState
- AUScreenPopupFieldState
- AUScreenPopupState
- AUScreenReportState
- AUTableScreenExtensionState
- CustPublishProject
- CustPublishState
- FSxLocation
- LandedCostTran
- LandedCostTranSplit
- POAlloc
- POTranAlloc
- Region

## Removed Columns

---

| Table Name | Column Name    |
|------------|----------------|
| APTran     | DetDiscIDC1    |
| APTran     | DetDiscSeqIDC1 |
| APTran     | DetDiscIDC2    |
| APTran     | DetDiscSeqIDC2 |
| APTran     | DocDiscIDC1    |
| APTran     | DocDiscSeqIDC1 |
| APTran     | DocDiscIDC2    |
| APTran     | DocDiscSeqIDC2 |
| ARRegister | DiscTot        |

| Table Name                  | Column Name                 |
|-----------------------------|-----------------------------|
| ARRegister                  | CuryDiscTot                 |
| ARTran                      | DetDiscIDC1                 |
| ARTran                      | DetDiscSeqIDC1              |
| ARTran                      | DetDiscIDC2                 |
| ARTran                      | DetDiscSeqIDC2              |
| ARTran                      | DetDiscApp                  |
| ARTran                      | DocDiscIDC1                 |
| ARTran                      | DocDiscSeqIDC1              |
| ARTran                      | DocDiscIDC2                 |
| ARTran                      | DocDiscSeqIDC2              |
| Country                     | AddressVerificationTypeName |
| CROpportunity               | DefRevisionID               |
| CROpportunity               | RevisionCntr                |
| CROpportunityDiscountDetail | OpportunityID               |
| CROpportunityDiscountDetail | RevisionID                  |
| CROpportunityProducts       | OpportunityID               |
| CROpportunityProducts       | RevisionID                  |
| CROpportunityRevision       | RevisionID                  |
| CROpportunityTax            | OpportunityID               |
| CROpportunityTax            | RevisionID                  |
| CRQuote                     | OpportunityID               |
| CRQuote                     | RevisionID                  |
| EPSetup                     | PostToOffBalance            |
| INSite                      | Exclude                     |
| LandedCostCode              | ApplicationMethod           |
| PivotTable                  | OwnerName                   |
| PMBillingRule               | IncludeZeroAmount           |
| PMBillingRule               | IncludeZeroQty              |

| Table Name | Column Name        |
|------------|--------------------|
| PMTask     | LineCtr            |
| POLine     | VoucheredQty       |
| POLine     | BaseVoucheredQty   |
| POLine     | CuryVoucheredCost  |
| POLine     | VoucheredCost      |
| POLine     | CuryReceivedCost   |
| POLine     | ReceivedCost       |
| POLine     | VoucherStatus      |
| POLine     | CuryOpenAmt        |
| POLine     | OpenAmt            |
| POOrder    | CuryOpenOrderTotal |
| POOrder    | OpenOrderTotal     |
| POOrder    | CuryOpenLineTotal  |
| POOrder    | OpenLineTotal      |
| POOrder    | CuryOpenTaxTotal   |
| POOrder    | OpenTaxTotal       |
| POOrder    | IsOpenTaxValid     |
| POReceipt  | IsTaxValid         |
| POReceipt  | IsUnbilledTaxValid |
| POReceipt  | CuryOrderTotal     |
| POReceipt  | OrderTotal         |
| POReceipt  | CuryLineTotal      |
| POReceipt  | LineTotal          |
| POReceipt  | DiscTot            |
| POReceipt  | CuryDiscTot        |
| POReceipt  | CuryTaxTotal       |
| POReceipt  | TaxTotal           |
| POReceipt  | TaxZoneID          |

| Table Name    | Column Name           |
|---------------|-----------------------|
| POReceipt     | TermsID               |
| POReceipt     | ControlTotal          |
| POReceipt     | CuryDiscAmt           |
| POReceipt     | DiscAmt               |
| POReceipt     | CuryControlTotal      |
| POReceipt     | DueDate               |
| POReceipt     | DiscDate              |
| POReceipt     | CuryUnbilledTotal     |
| POReceipt     | UnbilledTotal         |
| POReceipt     | CuryUnbilledLineTotal |
| POReceipt     | UnbilledLineTotal     |
| POReceipt     | CuryUnbilledTaxTotal  |
| POReceipt     | UnbilledTaxTotal      |
| POReceipt     | VatTaxableTotal       |
| POReceipt     | CuryVatTaxableTotal   |
| POReceipt     | VatExemptTotal        |
| POReceipt     | CuryVatExemptTotal    |
| POReceipt     | PayToVendorID         |
| POReceiptLine | CuryUnitCost          |
| POReceiptLine | CuryExtCost           |
| POReceiptLine | ExtCost               |
| POReceiptLine | CuryMultExtCost       |
| POReceiptLine | MultExtCost           |
| POReceiptLine | ManualDisc            |
| POReceiptLine | DiscPct               |
| POReceiptLine | CuryDiscAmt           |
| POReceiptLine | DiscAmt               |
| POReceiptLine | CuryLineAmt           |

| Table Name    | Column Name             |
|---------------|-------------------------|
| POReceiptLine | LineAmt                 |
| POReceiptLine | DiscountID              |
| POReceiptLine | DiscountSequenceID      |
| POReceiptLine | TaxCategoryID           |
| POReceiptLine | VoucheredQty            |
| POReceiptLine | BaseVoucheredQty        |
| POReceiptLine | CuryVoucheredCost       |
| POReceiptLine | VoucheredCost           |
| POReceiptLine | VoucherStatus           |
| POReceiptLine | CuryUnbilledAmt         |
| POReceiptLine | UnbilledAmt             |
| POReceiptLine | CuryPOAccrualAmt        |
| POReceiptLine | POAccrualAmt            |
| POReceiptLine | CuryUnbilledDiscountAmt |
| POReceiptLine | UnbilledDiscountAmt     |
| POReceiptLine | ReversedBillPPVAmt      |
| POReceiptLine | TaxID                   |
| PortalSetup   | BranchID                |
| POTax         | CuryOpenTaxableAmt      |
| POTax         | OpenTaxableAmt          |
| POTax         | CuryOpenTaxAmt          |
| POTax         | OpenTaxAmt              |
| POTaxTran     | CuryOpenTaxableAmt      |
| POTaxTran     | OpenTaxableAmt          |
| POTaxTran     | CuryOpenTaxAmt          |
| POTaxTran     | OpenTaxAmt              |
| SOInvoice     | CuryFreightCost         |
| SOInvoice     | FreightCost             |

| Table Name | Column Name           |
|------------|-----------------------|
| SOInvoice  | CuryFreightAmt        |
| SOInvoice  | FreightAmt            |
| SOInvoice  | CuryPremiumFreightAmt |
| SOInvoice  | PremiumFreightAmt     |
| SOInvoice  | CuryFreightTot        |
| SOInvoice  | FreightTot            |
| SOInvoice  | CuryMiscTot           |
| SOInvoice  | MiscTot               |
| SOInvoice  | CuryLineTotal         |
| SOInvoice  | LineTotal             |
| SOInvoice  | CuryTaxTotal          |
| SOInvoice  | TaxTotal              |
| SOInvoice  | DiscTot               |
| SOInvoice  | CuryDiscTot           |
| SOLine     | PlanID                |
| SOLine     | DetDiscIDC1           |
| SOLine     | DetDiscSeqIDC1        |
| SOLine     | DetDiscIDC2           |
| SOLine     | DetDiscSeqIDC2        |
| SOLine     | DetDiscApp            |
| SOLine     | DocDisclDC1           |
| SOLine     | DocDiscSeqIDC1        |
| SOLine     | DocDisclDC2           |
| SOLine     | DocDiscSeqIDC2        |
| SOLine     | POLineNbr             |
| SOLine     | OrigPOType            |
| SOLine     | OrigPONbr             |
| SOLine     | OrigPOLineNbr         |



| Table Name              | Column Name               |
|-------------------------|---------------------------|
| SOOrder                 | OrigPOType                |
| SOOrder                 | OrigPONbr                 |
| SOOrderShipment         | OrigPOType                |
| SOOrderShipment         | OrigPONbr                 |
| SOPickPackShipUserSetup | ShipmentConfirmation      |
| SOPickPackShipUserSetup | ShipmentConfirmationQueue |
| SOPickPackShipUserSetup | ShipmentLabels            |
| SOPickPackShipUserSetup | ShipmentLabelsQueue       |
| SOSetup                 | PromoLineDisc             |
| SOSetup                 | PromoDocDisc              |
| SOShipLine              | DetDiscIDC1               |
| SOShipLine              | DetDiscSeqIDC1            |
| SOShipLine              | DetDiscIDC2               |
| SOShipLine              | DetDiscSeqIDC2            |
| SOShipLine              | DetDiscApp                |
| SOShipLine              | DocDiscIDC1               |
| SOShipLine              | DocDiscSeqIDC1            |
| SOShipLine              | DocDiscIDC2               |
| SOShipLine              | DocDiscSeqIDC2            |
| AUScheduleHistory       | CompanyMask               |
| AUScreenActionState     | StatelD                   |
| AUScreenActionState     | ActionID                  |
| AUScreenActionState     | DataMember                |
| AUScreenActionState     | IsTopLevel                |
| AUScreenActionState     | Sequence                  |
| AUScreenActionState     | IsEnable                  |
| AUScreenActionState     | EnableCondition           |
| AUScreenActionState     | IsVisible                 |

| Table Name             | Column Name            |
|------------------------|------------------------|
| AUScreenActionState    | VisibleCondition       |
| AUScreenConditionState | StateID                |
| CRSetup                | ShowAuthorForCaseEmail |
| FSBranchLocation       | AddressLine1           |
| FSBranchLocation       | AddressLine2           |
| FSBranchLocation       | AddressLine3           |
| FSBranchLocation       | City                   |
| FSBranchLocation       | CountryID              |
| FSBranchLocation       | EMail                  |
| FSBranchLocation       | Fax                    |
| FSBranchLocation       | IsValidated            |
| FSBranchLocation       | Phone1                 |
| FSBranchLocation       | Phone2                 |
| FSBranchLocation       | Phone3                 |
| FSBranchLocation       | PostalCode             |
| FSBranchLocation       | Salutation             |
| FSBranchLocation       | State                  |
| FSBranchLocation       | WebSite                |
| FSManufacturer         | AddressLine1           |
| FSManufacturer         | AddressLine2           |
| FSManufacturer         | AddressLine3           |
| FSManufacturer         | City                   |
| FSManufacturer         | CountryID              |
| FSManufacturer         | EMail                  |
| FSManufacturer         | Fax                    |
| FSManufacturer         | IsValidated            |
| FSManufacturer         | Phone1                 |
| FSManufacturer         | Phone2                 |

| Table Name            | Column Name       |
|-----------------------|-------------------|
| FSManufacturer        | Phone3            |
| FSManufacturer        | PostalCode        |
| FSManufacturer        | Salutation        |
| FSManufacturer        | State             |
| FSManufacturer        | WebSite           |
| FSServiceOrder        | AddressLine1      |
| FSServiceOrder        | AddressLine2      |
| FSServiceOrder        | AddressLine3      |
| FSServiceOrder        | AddressValidated  |
| FSServiceOrder        | Attention         |
| FSServiceOrder        | City              |
| FSServiceOrder        | CountryID         |
| FSServiceOrder        | EMail             |
| FSServiceOrder        | Fax               |
| FSServiceOrder        | Phone1            |
| FSServiceOrder        | Phone2            |
| FSServiceOrder        | Phone3            |
| FSServiceOrder        | PostalCode        |
| FSServiceOrder        | State             |
| FSSrvOrdType          | AppWithMultEmp    |
| FSSrvOrdType          | AppWithoutEmp     |
| FSSrvOrdType          | AppWithoutSrv     |
| FSSrvOrdType          | SingleAppointment |
| FSSrvOrdType          | SingleService     |
| FSxService            | AutoShowNote      |
| GINavigationParameter | ScreenID          |
| GINavigationParameter | ParamID           |
| GINavigationParameter | CompanyParamID    |

| Table Name                     | Column Name                               |
|--------------------------------|---|
| GIResult                       | NavigateTo                                |
| INLotSerClass                  | LotSerNumVal                              |
| INSite                         | LockSitePICountEntry                      |
| InventoryItem                  | LotSerNumVal                              |
| MobilePushNotificationRegToken | CompanyID                                 |
| MobilePushNotificationRegToken | UserID                                    |
| MobilePushNotificationRegToken | Enabled                                   |
| PivotField                     | FieldType                                 |
| PMChangeOrderLine              | AmountInBaseCury                          |
| PMProjectStatus                | LastCostAtCompletion                      |
| POOrder                        | Receipt                                   |
| SOPickPackShipUserSetup        | AutoSelectLotSerialNumberLocation         |
| SOPickPackShipUserSetup        | PromptLocation                            |
| SOPickPackShipUserSetup        | CarrierLabelPrintWithDeviceHub            |
| SOPickPackShipUserSetup        | CarrierLabelDefinePrinterManually         |
| SOPickPackShipUserSetup        | CarrierLabelPrinterName                   |
| SOPickPackShipUserSetup        | ShipmentConfirmationPrintWithDeviceHub    |
| SOPickPackShipUserSetup        | ShipmentConfirmationDefinePrinterManually |
| SOPickPackShipUserSetup        | ShipmentConfirmationPrinterName           |

## Modified Columns

| Table                   | Column               | Old Type | New Type          | Old Precision | New Precision | Old Scale | New Scale |
|-------------------------|----------------------|----------|-------------------|---------------|---------------|-----------|-----------|
| APPaymentChargeTran     | TranDesc             | NVarChar | NVarChar          | 0             | 0             | 255       | 256       |
| APRegister              | DocDesc              | NVarChar | NVarChar          | 0             | 0             | 60        | 256       |
| ARInvoiceDiscountDetail | DiscountableQty      | Decimal  | Decimal           | 19            | 19            | 4         | 6         |
| ARPaymentChargeTran     | TranDesc             | NVarChar | NVarChar          | 0             | 0             | 255       | 256       |
| ARRegister              | DocDesc              | NVarChar | NVarChar          | 0             | 0             | 150       | 256       |
| AUScreenActionState     | ScreenID             | Char     | VarChar           | 0             | 0             | 8         | 8         |
| AUScreenConditionState  | ScreenID             | Char     | VarChar           | 0             | 0             | 8         | 8         |
| AUScreenConditionState  | ConditionID          | NVarChar | UniquelIdentifier | 0             | 0             | 50        | 0         |
| CarrierPluginDetail     | DetailID             | NVarChar | NVarChar          | 0             | 0             | 15        | 30        |
| CashForecastTran        | TranDesc             | NVarChar | NVarChar          | 0             | 0             | 150       | 256       |
| CATransfer              | Descr                | NVarChar | NVarChar          | 0             | 0             | 60        | 256       |
| CRActivity              | Subject              | NVarChar | NVarChar          | 0             | 0             | 255       | 256       |
| CRCase                  | Subject              | NVarChar | NVarChar          | 0             | 0             | 255       | 256       |
| CROpportunityProducts   | Descr                | NVarChar | NVarChar          | 0             | 0             | 60        | 256       |
| CROpportunityProducts   | GroupDiscountRate    | Decimal  | Decimal           | 9             | 21            | 6         | 18        |
| CROpportunityProducts   | DocumentDiscountRate | Decimal  | Decimal           | 9             | 21            | 6         | 18        |
| EPExpenseClaim          | DocDesc              | NVarChar | NVarChar          | 0             | 0             | 60        | 256       |

|                             |                  |          |          |   |   |     |     |
|-----------------------------|------------------|----------|----------|---|---|-----|-----|
| EPRuleCondition             | Entity           | VarChar  | VarChar  | 0 | 0 | 60  | 256 |
| EPRuleEmployeeCondition     | Entity           | VarChar  | VarChar  | 0 | 0 | 60  | 256 |
| FSAppointment               | DocDesc          | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| FSAppointmentDet            | PriceType        | NVarChar | Char     | 0 | 0 | 5   | 5   |
| FSAppointmentDet            | TranDesc         | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| FSBillingCycle              | BillingCycleType | NVarChar | Char     | 0 | 0 | 2   | 2   |
| FSBillingCycle              | TimeCycleType    | NVarChar | Char     | 0 | 0 | 2   | 2   |
| FSCreatedDoc                | CreatedDocType   | NVarChar | VarChar  | 0 | 0 | 255 | 4   |
| FSCreatedDoc                | CreatedRefNbr    | NVarChar | NVarChar | 0 | 0 | 255 | 15  |
| FSCustomerBillingSetup      | FrequencyType    | NVarChar | Char     | 0 | 0 | 2   | 2   |
| FSCustomerClassBillingSetup | FrequencyType    | NVarChar | Char     | 0 | 0 | 2   | 2   |
| FSScheduleDet               | TranDesc         | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| FSServiceOrder              | DocDesc          | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| FSServiceTemplateDet        | TranDesc         | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| FSSODet                     | TranDesc         | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| INAvailabilityScheme        | Description      | NVarChar | NVarChar | 0 | 0 | 250 | 256 |
| INCategory                  | Description      | NVarChar | NVarChar | 0 | 0 | 50  | 256 |
| INItemClass                 | Descr            | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| INItemClass                 | HSTariffCode     | NVarChar | NVarChar | 0 | 0 | 10  | 30  |
| INItemXRef                  | Descr            | NVarChar | NVarChar | 0 | 0 | 60  | 256 |

|                      |              |          |          |   |   |     |     |
|----------------------|--------------|----------|----------|---|---|-----|-----|
| INKitSpecHdr         | Descr        | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| INLotSerClass        | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| INMovementClass      | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| INPIClass            | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| INPIHeader           | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| INPostClass          | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| INPriceClass         | Description  | NVarChar | NVarChar | 0 | 0 | 250 | 256 |
| INReplenishmentClass | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| InventoryItem        | HSTariffCode | NVarChar | NVarChar | 0 | 0 | 10  | 30  |
| InventoryItem        | Descr        | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| LandedCostTran       | Descr        | NVarChar | NVarChar | 0 | 0 | 60  | 256 |
| PMBudget             | Description  | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| PMProformaLine       | Description  | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| PMTimeActivity       | Summary      | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| PMTran               | Description  | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| RQRequestLine        | Description  | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| RQRequisitionLine    | Description  | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| SMEmail              | Subject      | NVarChar | NVarChar | 0 | 0 | 255 | 256 |
| SOOrder              | OrderDesc    | NVarChar | NVarChar | 0 | 0 | 255 | 256 |

## Modified Indexes

These changes are not breaking but the information about them can be useful. The list includes only the changes made to the tables that exist in both the previous and the current versions of the database scheme.

| Table                  | Index                     | Column                  | Modification     |
|------------------------|---------------------------|-------------------------|------------------|
| APAdjust               | APAdjust_PK               | AdjLineNbr              | New column added |
| APAdjust               | APAdjust_UK1              | AdjLineNbr              | New column added |
| AUScreenActionState    | AUScreenActionState_PK    | CompanyID               | New column added |
| AUScreenActionState    | AUScreenActionState_PK    | ActionName              | New column added |
| AUScreenActionState    | AUScreenActionState_PK    | StateID                 | Column removed   |
| AUScreenActionState    | AUScreenActionState_PK    | ActionID                | Column removed   |
| AUScreenConditionState | AUScreenConditionState_PK | CompanyID               | New column added |
| AUScreenConditionState | AUScreenConditionState_PK | StateID                 | Column removed   |
| Branch                 | Branch_BranchCD           |                         | Index added      |
| DRScheduleDetail       | DRScheduleDetail_PK       | DetailLineNbr           | New column added |
| DRScheduleTran         | DRScheduleTran_PK         | DetailLineNbr           | New column added |
| FABookPeriod           | FABookPeriod_PK           | OrganizationID          | New column added |
| FABookYear             | FABookYear_PK             | OrganizationID          | New column added |
| GINavigationParameter  | PK_GINavigationParameter  | NavigationScreenLineNbr | New column added |
| GINavigationParameter  | PK_GINavigationParameter  | LineNbr                 | New column added |
| GINavigationParameter  | PK_GINavigationParameter  | ScreenID                | Column removed   |



| Table                          | Index                             | Column    | Modification     |
|--------------------------------|-----------------------------------|-----------|------------------|
| GINavigationParameter          | PK_GINavigationParameter          | ParamID   | Column removed   |
| GINavigationScreen             | PK_GINavigationScreen             | LineNbr   | New column added |
| GINavigationScreen             | PK_GINavigationScreen             | ScreenID  | Column removed   |
| INTranCost                     | INTranCost_PK                     | DocType   | New column added |
| INTranCost                     | INTranCost_PK                     | TranType  | Column removed   |
| MobilePushNotificationRegToken | PK_MobilePushNotificationRegToken | CompanyID | Column removed   |
| MobilePushNotificationRegToken | PK_MobilePushNotificationRegToken | UserID    | Column removed   |
| PMAccountGroup                 | PMAccountGroup_GroupCD            |           | Index added      |
| PMHistory                      | PMHistory_PK                      | BranchID  | New column added |
| SMPageCache                    | PK SMPageCa 08D4870CB508DEC0      |           | Index removed    |
| SMPageCache                    | PK SMPageCa 08D4870CA5FAD377      |           | Index added      |

# Code Changes

## Removed Data Access Classes

| Parent Namespace | Name                     |
|------------------|--------------------------|
| PX.SM            | RowTaskManager           |
| PX.Objects.PPS   | SOPackageDetailSplit     |
| PX.Objects.PM    | PMDetail                 |
| PX.Objects.PM    | PMDetailExt              |
| PX.Objects.PM    | PMDetailAcum             |
| PX.Objects.PM    | RegisterEntry+PMDetailEx |
| PX.Objects.PO    | POReceiptLineR           |
| PX.Objects.PO    | POLineAP                 |
| PX.Objects.PO    | POReceiptDiscountDetail  |
| PX.Objects.PO    | POReceiptTaxTran         |
| PX.Objects.PO    | LandedCostTran           |
| PX.Objects.PO    | LandedCostTranSplit      |
| PX.Objects.PO    | POReceiptTax             |
| PX.Objects.PO    | POReceiptLCInfo          |
| PX.Objects.PO    | APTranPOLinked           |
| PX.Objects.TX    | TXAvalaraMapping         |



| Parent Namespace                   | Name                            |
|------------------------------------|---------------------------------|
| PX.Objects.TX                      | TXAvalaraSetup                  |
| PX.Objects.SO                      | SOInvoiceDiscountDetail         |
| PX.Objects.DR                      | DRFinPeriodSelection            |
| PX.Objects.GL                      | FinPeriod                       |
| PX.Objects.GL                      | FinYear                         |
| PX.Objects.GL.Overrides.CloseGraph | BatchCopy                       |
| PX.Objects.GL.Overrides.CloseGraph | AcctHist                        |
| PX.Objects.EP                      | EPEmployeeRateByProject         |
| PX.Objects.EP                      | EPEmployeeRate                  |
| PX.Objects.AR                      | RecalcDiscountsParamFilter      |
| PX.Objects.AP                      | APIInvoiceLCInfo                |
| PX.Objects.AP                      | APIInvoiceEntry+LandedCostTranR |
| PX.Objects.AP                      | APIInvoiceEntry+POReceiptS      |
| PX.SM                              | AUScreenConditionFilterState    |
| PX.SM                              | AUScreenInquiryParamState       |
| PX.SM                              | AUScreenInquiryState            |
| PX.SM                              | AUScreenPopupState              |
| PX.SM                              | AUScreenPopupFieldState         |
| PX.SM                              | AUScreenReportState             |



| Parent Namespace | Name   |
|------------------|--|
| PX.SM            | AUTableExtensionCombo                                |
| PX.SM            | AUTableExtensionProp                                 |
| PX.SM            | AUTableScreenExtensionProp                           |
| PX.SM            | AUTableScreenExtensionState                          |
| PX.Data          | CustPublishProject                                   |
| PX.Data          | CustPublishState                                     |
| PX.Objects.PM    | ProjectBalanceValidationProcess+OffsetAccount        |
| PX.Objects.PM    | ProjectBalanceValidationProcess+OffsetPMAccountGroup |
| PX.Objects.PM    | ProjectBalanceValidationProcess+PMBudgetEx           |
| PX.Objects.SO    | SOPickPackShipUserPrintCarrierLabelSetup             |
| PX.Objects.SO    | SOPickPackShipUserPrintShipmentConfirmationSetup     |
| PX.Objects.SO    | SOMemoLine   |
| PX.Objects.SO    | ScanLog  |
| PX.Objects.SO    | PickPackInfo   |
| PX.Objects.SO    | PickPackShip+SOShipLineSplitPick                     |
| PX.Objects.SO    | PickPackShip+SOPackageDetailPick                     |
| PX.Objects.SO    | PickPackShip+SOShipLinePick                          |
| PX.Objects.IN    | INTransactionsHistory                                |
| PX.Objects.IN    | INTranSplitExtended                                  |



| Parent Namespace                          | Name                               |
|---|------------------------------------|
| PX.Objects.IN                             | INLotSerCostDetail                 |
| PX.Objects.IN                             | INTranSplitCostDetail              |
| PX.Objects.IN                             | INEstimatedCost                    |
| PX.Objects.IN                             | INCostStatusSubqueryEstimated      |
| PX.Objects.IN                             | InventoryByPIID                    |
| PX.Objects.IN                             | ItemSiteHavingNegativeBookQtys     |
| PX.Objects.IN                             | CostStatusToJoin                   |
| PX.Objects.IN                             | CostStatusConsolidated             |
| PX.Objects.IN                             | INPIEntry+InventoryByPIIDAnyStatus |
| PX.Objects.IN.Overrides.INDocumentRelease | POReceiptLineCost                  |
| PX.Objects.FA                             | FABookBalance+FABookPeriod2        |
| PX.Objects.CA                             | AddDetailFilter                    |
| PX.Objects.AR                             | ARPaymentEntry+CCPaymentInfo       |
| PX.Objects.AP                             | APInvoiceEntry+LinkLineFilter      |
| PX.Objects.AP                             | APInvoiceEntry+POLineS             |
| PX.Objects.AP                             | APInvoiceEntry+POOrderRS           |
| PX.Objects.AP                             | APInvoiceEntry+POReceiptLineS      |
| PX.Objects.AP                             | APInvoiceEntry+LinkLineOrder       |
| PX.Objects.AP                             | APInvoiceEntry+LinkLineReceipt     |



| Parent Namespace | Name                                     |
|------------------|--|
| PX.Objects.AP    | APIInvoiceEntry+POReceiptLineAdd         |
| PX.Objects.AP    | APIInvoiceEntry+POReceiptFilter          |
| PX.Objects.AP    | APIInvoiceEntry+POLandedCostDetailFilter |
| PX.Objects.FS    | FSCreateServiceOrderOnOpportunityFilter  |

## Removed Graphs

| Parent Namespace | Name                         |
|------------------|------------------------------|
| PX.Objects.PO    | LandedCostProcess            |
| PX.Objects.TX    | AvalaraMaint                 |
| PX.Objects.IN    | INClosing                    |
| PX.Objects.FA    | FAClosing                    |
| PX.Objects.GL    | Closing                      |
| PX.Objects.GL    | CloseGraph                   |
| PX.Objects.GL    | FiscalPeriodMaint            |
| PX.Objects.CR    | CRExternalQuoteTaxCalc       |
| PX.Objects.CR    | CRExternalOpportunityTaxCalc |
| PX.Objects.CA    | CAClosing                    |
| PX.Objects.AR    | ARClosing                    |

|   |   |
|---|---|
| PX.Objects.AP                             | APClosing   |
| PX.Objects.GL.Reclassification.Processing | JournalEntryForReclassification   |
| PX.Objects.FS                             | AppointmentEntryBase  |
| PX.Objects.FS                             | ServiceContractScheduleEntryBase<TGraph,TPrimary,Field,EntityField,CustomerField> |

## Modified Interfaces and Abstract Classes

| Parent Namespace | Name               | Methods Added | Methods Removed |
|------------------|--------------------|---------------|-----------------|
| PX.Data          | IBqlJoin           | 1             | 0               |
| PX.Data          | IBqlCreator        | 1             | 0               |
| PX.Data          | IBqlSearch         | 3             | 0               |
| PX.Data          | PXCache            | 3             | 0               |
| PX.Data          | IBqlOrderBy        | 1             | 0               |
| PX.Data          | IDataScreenFactory | 1             | 0               |
| PX.Data          | ISqlDialect        | 1             | 0               |
| PX.Data          | SqlDialectBase     | 1             | 0               |
| PX.Data          | IBqlSortColumn     | 1             | 0               |
| PX.Data          | IBqlOn             | 1             | 0               |
| PX.Data          | OnBase             | 1             | 0               |
| PX.Data          | IPXLicensePolicy   | 2             | 1               |
| PX.Api.Services  | IScreenService     | 1             | 0               |

| Parent Namespace                          | Name                                | Methods Added | Methods Removed |
|---|-------------------------------------|---------------|-----------------|
| PX.Objects.TX                             | ITaxableDetail                      | 2             | 0               |
| PX.Objects.TX                             | ITaxDetailWithAmounts               | 2             | 0               |
| PX.Objects.IN                             | IStatus                             | 14            | 0               |
| PX.Objects.IN.Overrides.INDocumentRelease | IQtyAllocated                       | 14            | 0               |
| PX.Objects.IN.Overrides.INDocumentRelease | IQtyAllocatedBase                   | 3             | 0               |
| PX.Objects.Extensions.MultiCurrency       | MultiCurrencyGraph<TGraph,TPrimary> | 2             | 0               |
| PX.Objects.GL                             | IPeriod                             | 0             | 2               |
| PX.Objects.CS                             | IContact                            | 2             | 0               |
| PX.Objects.CR                             | ILocation                           | 0             | 8               |
| PX.Objects.PO                             | IAPTranSource                       | 4             | 1               |
| PX.Data                                   | IBqlCreator                         | 0             | 1               |
| PX.Data                                   | InBase<Operand1>                    | 1             | 0               |
| PX.Data                                   | InBase3                             | 1             | 0               |
| PX.Data                                   | BqlCommand                          | 0             | 1               |
| PX.Data                                   | IBqlJoin                            | 0             | 1               |
| PX.Data                                   | IBqlUnary                           | 0             | 1               |
| PX.Data                                   | IBqlSet                             | 1             | 1               |
| PX.Data                                   | IBqlSelect                          | 1             | 0               |
| PX.Data                                   | PXAction                            | 1             | 0               |



| Parent Namespace                           | Name                              | Methods Added | Methods Removed |
|--|-----------------------------------|---------------|-----------------|
| PX.Data                                    | IBqlAggregate                     | 1             | 0               |
| PX.Data                                    | PXDatabaseProvider                | 1             | 0               |
| PX.Data                                    | ISqlDialect                       | 0             | 4               |
| PX.Data                                    | SqlDialectBase                    | 0             | 2               |
| PX.Data                                    | OnBase                            | 0             | 1               |
| PX.Data                                    | IPXResultset                      | 3             | 0               |
| PX.Data.Description.Gl                     | IPXValue                          | 1             | 2               |
| PX.Objects.CM                              | IDocumentTran                     | 10            | 0               |
| PX.Objects.PM                              | IRateTable                        | 1             | 0               |
| PX.Objects.GL                              | IPeriod                           | 2             | 0               |
| PX.Objects.GL                              | IFinPeriod                        | 0             | 2               |
| PX.Objects.GL.Descriptor                   | ICalendarOrganizationIDProvider   | 2             | 15              |
| PX.Objects.GL.FinPeriods                   | IFinPeriodUtils                   | 5             | 0               |
| PX.Objects.GL.FinPeriods                   | IFinPeriodRepository              | 18            | 2               |
| PX.Objects.Extensions.ContactAddress       | ContactAddressGraph<TGraph>       | 6             | 0               |
| PX.Objects.DR.Descriptor                   | IDREntityStorage                  | 1             | 1               |
| PX.Objects.AR.CCPaymentProcessing.Wrappers | IExtendedProfileProcessingWrapper | 1             | 0               |
| PX.Objects.AR.CCPaymentProcessing.Wrappers | ICardTransactionProcessingWrapper | 3             | 0               |
| PX.Objects.AR.CCPaymentProcessing.Common   | ICCPayment                        | 1             | 0               |

| Parent Namespace                         | Name                     | Methods Added | Methods Removed |
|--|--------------------------|---------------|-----------------|
| PX.Objects.AR.CCPaymentProcessing.Common | ICCTransactionsProcessor | 1             | 0               |
| PX.Objects.FS                            | IDocLine                 | 2             | 0               |
| PX.Objects.FS                            | IFSSODetBase             | 2             | 0               |

## Modified Return Values

---

None

## Removed Constants

---

| Namespace     | Name                                 |
|---------------|--------------------------------------|
| PX.SM         | Users+fullName+delimiter             |
| PX.Objects.PO | POReceiptTaxTran+lineNbrValue        |
| PX.Objects.PO | LandedCostTranSource+fromAP          |
| PX.Objects.PO | LandedCostTranSource+fromPO          |
| PX.Objects.PO | LandedCostApplicationMethod+fromAP   |
| PX.Objects.PO | LandedCostApplicationMethod+fromPO   |
| PX.Objects.PO | LandedCostApplicationMethod+fromBoth |
| PX.Objects.AR | DiscountType+LineDiscount            |
| PX.Objects.AR | DiscountType+GroupDiscount           |
| PX.Objects.AR | DiscountType+DocumentDiscount        |

| Namespace     | Name  |
|---------------|---|
| PX.Objects.AR | DiscountType+FlatDiscount                     |
| PX.Objects.AR | DiscountOption+PercentDiscount                |
| PX.Objects.AR | DiscountOption+AmountDiscount                 |
| PX.Objects.AR | DiscountOption+FreeltemDiscount               |
| PX.Objects.AR | BreakdownType+QuantityBreakdown               |
| PX.Objects.AR | BreakdownType+AmountBreakdown                 |
| PX.Objects.AR | DiscountTarget+customer                       |
| PX.Objects.AR | DiscountTarget+customerAndInventory           |
| PX.Objects.AR | DiscountTarget+customerAndInventoryPrice      |
| PX.Objects.AR | DiscountTarget+customerPrice                  |
| PX.Objects.AR | DiscountTarget+customerPriceAndInventory      |
| PX.Objects.AR | DiscountTarget+customerPriceAndInventoryPrice |
| PX.Objects.AR | DiscountTarget+customerAndBranch              |
| PX.Objects.AR | DiscountTarget+customerPriceAndBranch         |
| PX.Objects.AR | DiscountTarget+warehouse                      |
| PX.Objects.AR | DiscountTarget+warehouseAndInventory          |
| PX.Objects.AR | DiscountTarget+warehouseAndCustomer           |
| PX.Objects.AR | DiscountTarget+warehouseAndInventoryPrice     |
| PX.Objects.AR | DiscountTarget+warehouseAndCustomerPrice      |

| Namespace     | Name                                      |
|---------------|---|
| PX.Objects.AR | DiscountTarget+branch                     |
| PX.Objects.AR | DiscountTarget+vendor                     |
| PX.Objects.AR | DiscountTarget+vendorAndInventory         |
| PX.Objects.AR | DiscountTarget+vendorAndInventoryPrice    |
| PX.Objects.AR | DiscountTarget+vendorLocation             |
| PX.Objects.AR | DiscountTarget+vendorLocationAndInventory |
| PX.Objects.AR | DiscountTarget+inventory                  |
| PX.Objects.AR | DiscountTarget+inventoryPrice             |
| PX.Objects.AR | DiscountTarget+unconditional              |
| PX.SM         | AUDataType+nvarchar_t                     |
| PX.SM         | AUDataType+int_t                          |
| PX.SM         | AUDataType+boolean_t                      |
| PX.SM         | AUDataType+decimal_t                      |
| PX.SM         | AUDataType+datetime_t                     |
| PX.SM         | AUStorageType+virtualType                 |
| PX.SM         | AUStorageType+attributeType               |
| PX.SM         | AUStorageType+tableType                   |
| PX.SM         | AUStorageType+baseType                    |
| PX.SM         | AUStorageType+separateTableType           |



| Namespace     | Name   |
|---------------|--|
| PX.SM         | AUStorageType+projectionType                               |
| PX.Data       | ConstantMessage  |
| PX.Data       | ConstantInterval   |
| PX.Data       | BoolConstant   |
| PX.Objects.CA | ProcessingCenterTypeNameConstants+authnetAPIPluginFullName |
| PX.Objects.CA | ProcessingCenterTypeNameConstants+authnetCIMPluginFullName |
| PX.Objects.CA | ProcessingCenterTypeNameConstants+authnetAIMPluginFullName |
| PX.Objects.AP | APIInvoiceEntry+LinkLineFilter+selectedMode+order          |
| PX.Objects.AP | APIInvoiceEntry+LinkLineFilter+selectedMode+receipt        |
| PX.Objects.AP | APIInvoiceEntry+LinkLineFilter+selectedMode+landedCost     |

## Other Removed Classes

| Namespace | Name   |
|-----------|--|
| PX.SM     | RowTaskManager+showAllUsers                        |
| PX.Data   | PXDBLocalizableStringAttribute+OnDemandCommand     |
| PX.Data   | PreventEditOf<TField>+On<TGraph>                   |
| PX.Data   | PreventEditOf<TField>+On<TGraph>+IfExists<TSelect> |
| PX.Data   | RuleWeakeningScope<TField>                         |
| PX.Data   | ICarrierService                                    |

| Namespace | Name  |
|-----------|---|
| PX.Data   | CarrierRequest                              |
| PX.Data   | CarrierMethod                               |
| PX.Data   | UnitsType                                   |
| PX.Data   | RateQuote                                   |
| PX.Data   | CarrierResult<T>                            |
| PX.Data   | Message                                     |
| PX.Data   | IAddressBase                                |
| PX.Data   | IContactBase                                |
| PX.Data   | ICarrierDetail                              |
| PX.Data   | CarrierBox                                  |
| PX.Data   | InternationalCustomsInfo                    |
| PX.Data   | InternationalCustomsInfoLine                |
| PX.Data   | CarrierBoxEx                                |
| PX.Data   | ShipResult                                  |
| PX.Data   | PackageData                                 |
| PX.Data   | CarrierCertificationData                    |
| PX.Data   | PXCustomAttributesCache<TNode>              |
| PX.Data   | PXCustomAttributesCache<TNode>+GetAttriutes |
| PX.Data   | PXCompositeKeyAttribute                     |

| Namespace      | Name  |
|----------------|---|
| PX.Data        | PXCompositeKeyAttribute+CompositeView         |
| PX.Data        | PXSplitRowAttribute                           |
| PX.Api         | HttpConfigurationExtensions                   |
| PX.Objects.WZ  | WZFinPeriodAttribute                          |
| PX.Objects.WZ  | WZFinPeriodIDFormattingAttribute              |
| PX.Objects.WZ  | WZFinPeriodIDFormattingAttribute+PeriodResult |
| PX.Objects.PPS | SOPackageDetailSplit+shipmentNbr              |
| PX.Objects.PPS | SOPackageDetailSplit+lineNbr                  |
| PX.Objects.PPS | SOPackageDetailSplit+splitLineNbr             |
| PX.Objects.PPS | SOPackageDetailSplit+shipmentLineNbr          |
| PX.Objects.PPS | SOPackageDetailSplit+inventoryID              |
| PX.Objects.PPS | SOPackageDetailSplit+subItemID                |
| PX.Objects.PPS | SOPackageDetailSplit+uOM                      |
| PX.Objects.PPS | SOPackageDetailSplit+qty                      |
| PX.Objects.PPS | SOPackageDetailSplit+baseQty                  |
| PX.Objects.PPS | SOPackageDetailSplit+Tstamp                   |
| PX.Objects.PPS | SOPackageDetailSplit+createdByID              |
| PX.Objects.PPS | SOPackageDetailSplit+createdByScreenID        |
| PX.Objects.PPS | SOPackageDetailSplit+createdDateTime          |

| Namespace      | Name  |
|----------------|---|
| PX.Objects.PPS | SOPackageDetailSplit+lastModifiedByID       |
| PX.Objects.PPS | SOPackageDetailSplit+lastModifiedByScreenID |
| PX.Objects.PPS | SOPackageDetailSplit+lastModifiedDateTime   |
| PX.Objects.PM  | POLinePM+curyOpenAmt                        |
| PX.Objects.PM  | PMRevenueBudget+description                 |
| PX.Objects.PM  | PMDetail+pMDetailID                         |
| PX.Objects.PM  | PMDetail+contractID                         |
| PX.Objects.PM  | PMDetail+lineNbr                            |
| PX.Objects.PM  | PMDetail+revID                              |
| PX.Objects.PM  | PMDetail+taskID                             |
| PX.Objects.PM  | PMDetail+inventoryID                        |
| PX.Objects.PM  | PMDetail+contractItemID                     |
| PX.Objects.PM  | PMDetail+curyID                             |
| PX.Objects.PM  | PMDetail+curyInfoID                         |
| PX.Objects.PM  | PMDetail+itemFee                            |
| PX.Objects.PM  | PMDetail+curyItemFee                        |
| PX.Objects.PM  | PMDetail+accountSource                      |
| PX.Objects.PM  | PMDetail+accountID                          |
| PX.Objects.PM  | PMDetail+subMask                            |



| Namespace     | Name                            |
|---------------|---------------------------------|
| PX.Objects.PM | PMDetail+subID                  |
| PX.Objects.PM | PMDetail+description            |
| PX.Objects.PM | PMDetail+resetUsage             |
| PX.Objects.PM | PMDetail+included               |
| PX.Objects.PM | PMDetail+used                   |
| PX.Objects.PM | PMDetail+usedTotal              |
| PX.Objects.PM | PMDetail+uOM                    |
| PX.Objects.PM | PMDetail+lastBilledDate         |
| PX.Objects.PM | PMDetail+lastBilledQty          |
| PX.Objects.PM | PMDetail+Tstamp                 |
| PX.Objects.PM | PMDetail+createdByID            |
| PX.Objects.PM | PMDetail+createdByScreenID      |
| PX.Objects.PM | PMDetail+createdDateTime        |
| PX.Objects.PM | PMDetail+lastModifiedByID       |
| PX.Objects.PM | PMDetail+lastModifiedByScreenID |
| PX.Objects.PM | PMDetail+lastModifiedDateTime   |
| PX.Objects.PM | PMDetailExt+pMDetailID          |
| PX.Objects.PM | PMDetailExt+contractID          |
| PX.Objects.PM | PMDetailExt+lineNbr             |

| Namespace     | Name                       |
|---------------|----------------------------|
| PX.Objects.PM | PMDetailExt+revID          |
| PX.Objects.PM | PMDetailExt+contractItemID |
| PX.Objects.PM | PMDetailAcum+pMDetailID    |
| PX.Objects.PM | PMDetailAcum+contractID    |
| PX.Objects.PM | PMDetailAcum+lineNbr       |
| PX.Objects.PM | PMDetailAcum+revID         |
| PX.Objects.PM | PMDetailAcum+taskID        |
| PX.Objects.PM | PMDetailAcum+inventoryID   |
| PX.Objects.PM | PMDetailAcum+curyInfoID    |
| PX.Objects.PM | PMDetailAcum+itemFee       |
| PX.Objects.PM | PMDetailAcum+curyItemFee   |
| PX.Objects.PM | PMDetailAcum+accountID     |
| PX.Objects.PM | PMDetailAcum+subID         |
| PX.Objects.PM | PMDetailAcum+description   |
| PX.Objects.PM | PMDetailAcum+resetUsage    |
| PX.Objects.PM | PMDetailAcum+included      |
| PX.Objects.PM | PMDetailAcum+used          |
| PX.Objects.PM | PMDetailAcum+usedTotal     |
| PX.Objects.PM | PMDetailAcum+uOM           |

| Namespace     | Name                                 |
|---------------|--------------------------------------|
| PX.Objects.PM | PMDetailAcum+lastBilledDate          |
| PX.Objects.PM | PMDetailAcum+lastBilledQty           |
| PX.Objects.PM | PMDetailAcum+Tstamp                  |
| PX.Objects.PM | PMDetailAcum+createdByID             |
| PX.Objects.PM | PMDetailAcum+createdByScreenID       |
| PX.Objects.PM | PMDetailAcum+createdDateTime         |
| PX.Objects.PM | PMDetailAcum+lastModifiedByID        |
| PX.Objects.PM | PMDetailAcum+lastModifiedByScreenID  |
| PX.Objects.PM | PMDetailAcum+lastModifiedDateTime    |
| PX.Objects.PM | PMBillingRule+includeZeroQty         |
| PX.Objects.PM | RegisterEntry+PMDetailEx+pMDetailID  |
| PX.Objects.PM | RegisterEntry+PMDetailEx+contractID  |
| PX.Objects.PM | RegisterEntry+PMDetailEx+taskID      |
| PX.Objects.PM | RegisterEntry+PMDetailEx+inventoryID |
| PX.Objects.PM | PMTask+lineCtr                       |
| PX.Objects.PM | PMDetailAccumAttribute               |
| PX.Objects.PO | POReceiptLineR+receiptNbr            |
| PX.Objects.PO | POReceiptLineR+lineNbr               |
| PX.Objects.PO | POReceiptLineR+sortOrder             |

| Namespace     | Name                                   |
|---------------|--|
| PX.Objects.PO | POReceiptLineR+inventoryID             |
| PX.Objects.PO | POReceiptLineR+invMult                 |
| PX.Objects.PO | POReceiptLineR+receiptQty              |
| PX.Objects.PO | POReceiptLineR+voucheredQty            |
| PX.Objects.PO | POReceiptLineR+baseVoucheredQty        |
| PX.Objects.PO | POReceiptLineR+curyInfoID              |
| PX.Objects.PO | POReceiptLineR+curyVoucheredCost       |
| PX.Objects.PO | POReceiptLineR+voucheredCost           |
| PX.Objects.PO | POReceiptLineR+uOM                     |
| PX.Objects.PO | POReceiptLineR+signedVoucheredQty      |
| PX.Objects.PO | POReceiptLineR+signedBaseVoucheredQty  |
| PX.Objects.PO | POReceiptLineR+signedCuryVoucheredCost |
| PX.Objects.PO | POReceiptLineR+signedVoucheredCost     |
| PX.Objects.PO | POReceiptLineR+Tstamp                  |
| PX.Objects.PO | POLineAP+orderType                     |
| PX.Objects.PO | POLineAP+orderNbr                      |
| PX.Objects.PO | POLineAP+lineNbr                       |
| PX.Objects.PO | POLineAP+sortOrder                     |
| PX.Objects.PO | POLineAP+inventoryID                   |

| Namespace     | Name                                    |
|---------------|---|
| PX.Objects.PO | POLineAP+voucheredQty                   |
| PX.Objects.PO | POLineAP+baseVoucheredQty               |
| PX.Objects.PO | POLineAP+curyInfoID                     |
| PX.Objects.PO | POLineAP+curyVoucheredCost              |
| PX.Objects.PO | POLineAP+voucheredCost                  |
| PX.Objects.PO | POLineAP+receivedQty                    |
| PX.Objects.PO | POLineAP+baseReceivedQty                |
| PX.Objects.PO | POLineAP+curyReceivedCost               |
| PX.Objects.PO | POLineAP+receivedCost                   |
| PX.Objects.PO | POLineAP+uOM                            |
| PX.Objects.PO | POLineAP+Tstamp                         |
| PX.Objects.PO | POReceiptLineR1+curyInfoID              |
| PX.Objects.PO | POReceiptLineR1+curyExtCost             |
| PX.Objects.PO | POReceiptLineR1+curyUnbilledAmt         |
| PX.Objects.PO | POReceiptLineR1+unbilledAmt             |
| PX.Objects.PO | POReceiptLineR1+curyPOAccrualAmt        |
| PX.Objects.PO | POReceiptLineR1+pOAccrualAmt            |
| PX.Objects.PO | POReceiptLineR1+curyUnbilledDiscountAmt |
| PX.Objects.PO | POReceiptLineR1+unbilledDiscountAmt     |

| Namespace     | Name  |
|---------------|---|
| PX.Objects.PO | POReceiptLineR1+curyUnbilledExtCost         |
| PX.Objects.PO | POReceiptLineR1+unbilledExtCost             |
| PX.Objects.PO | POReceiptLineR1+curyUnitCost                |
| PX.Objects.PO | POReceiptLineR1+reversedBillPPVAmt          |
| PX.Objects.PO | POReceiptLineR1+unitCost                    |
| PX.Objects.PO | POReceiptLineR1+groupDiscountRate           |
| PX.Objects.PO | POReceiptLineR1+documentDiscountRate        |
| PX.Objects.PO | POReceiptLineR1+taxCategoryID               |
| PX.Objects.PO | POReceiptDiscountDetail+lineNbr             |
| PX.Objects.PO | POReceiptDiscountDetail+skipDiscount        |
| PX.Objects.PO | POReceiptDiscountDetail+receiptType         |
| PX.Objects.PO | POReceiptDiscountDetail+receiptNbr          |
| PX.Objects.PO | POReceiptDiscountDetail+discountID          |
| PX.Objects.PO | POReceiptDiscountDetail+discountSequenceID  |
| PX.Objects.PO | POReceiptDiscountDetail+type                |
| PX.Objects.PO | POReceiptDiscountDetail+curyInfolD          |
| PX.Objects.PO | POReceiptDiscountDetail+discountableAmt     |
| PX.Objects.PO | POReceiptDiscountDetail+curyDiscountableAmt |
| PX.Objects.PO | POReceiptDiscountDetail+discountableQty     |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.PO | POReceiptDiscountDetail+discountAmt            |
| PX.Objects.PO | POReceiptDiscountDetail+curyDiscountAmt        |
| PX.Objects.PO | POReceiptDiscountDetail+discountPct            |
| PX.Objects.PO | POReceiptDiscountDetail+freeltemID             |
| PX.Objects.PO | POReceiptDiscountDetail+freeltemQty            |
| PX.Objects.PO | POReceiptDiscountDetail+isManual               |
| PX.Objects.PO | POReceiptDiscountDetail+Tstamp                 |
| PX.Objects.PO | POReceiptDiscountDetail+createdByID            |
| PX.Objects.PO | POReceiptDiscountDetail+createdByScreenID      |
| PX.Objects.PO | POReceiptDiscountDetail+createdDateTime        |
| PX.Objects.PO | POReceiptDiscountDetail+lastModifiedByID       |
| PX.Objects.PO | POReceiptDiscountDetail+lastModifiedByScreenID |
| PX.Objects.PO | POReceiptDiscountDetail+lastModifiedDateTime   |
| PX.Objects.PO | POReceiptTaxTran+recordID                      |
| PX.Objects.PO | POReceiptTaxTran+receiptNbr                    |
| PX.Objects.PO | POReceiptTaxTran+lineNbr                       |
| PX.Objects.PO | POReceiptTaxTran+taxID                         |
| PX.Objects.PO | POReceiptTaxTran+jurisType                     |
| PX.Objects.PO | POReceiptTaxTran+jurisName                     |

| Namespace     | Name                                    |
|---------------|---|
| PX.Objects.PO | POReceiptTaxTran+taxRate                |
| PX.Objects.PO | POReceiptTaxTran+curyInfolD             |
| PX.Objects.PO | POReceiptTaxTran+curyTaxableAmt         |
| PX.Objects.PO | POReceiptTaxTran+curyUnbilledTaxableAmt |
| PX.Objects.PO | POReceiptTaxTran+taxableAmt             |
| PX.Objects.PO | POReceiptTaxTran+unbilledTaxableAmt     |
| PX.Objects.PO | POReceiptTaxTran+curyTaxAmt             |
| PX.Objects.PO | POReceiptTaxTran+curyUnbilledTaxAmt     |
| PX.Objects.PO | POReceiptTaxTran+taxAmt                 |
| PX.Objects.PO | POReceiptTaxTran+curyExpenseAmt         |
| PX.Objects.PO | POReceiptTaxTran+unbilledTaxAmt         |
| PX.Objects.PO | POTaxTran+curyOpenTaxableAmt            |
| PX.Objects.PO | POTaxTran+openTaxableAmt                |
| PX.Objects.PO | POTaxTran+curyOpenTaxAmt                |
| PX.Objects.PO | POTaxTran+openTaxAmt                    |
| PX.Objects.PO | LandedCostTran+ICTranID                 |
| PX.Objects.PO | LandedCostTran+source                   |
| PX.Objects.PO | LandedCostTran+landedCostCodeID         |
| PX.Objects.PO | LandedCostTran+pOReceiptType            |



| Namespace     | Name                            |
|---------------|---------------------------------|
| PX.Objects.PO | LandedCostTran+pORceiptNbr      |
| PX.Objects.PO | LandedCostTran+pORceiptLineNbr  |
| PX.Objects.PO | LandedCostTran+lineNbr          |
| PX.Objects.PO | LandedCostTran+aPDocType        |
| PX.Objects.PO | LandedCostTran+aPRefNbr         |
| PX.Objects.PO | LandedCostTran+iNDocType        |
| PX.Objects.PO | LandedCostTran+iNRefNbr         |
| PX.Objects.PO | LandedCostTran+descr            |
| PX.Objects.PO | LandedCostTran+invoiceNbr       |
| PX.Objects.PO | LandedCostTran+vendorID         |
| PX.Objects.PO | LandedCostTran+vendorLocationID |
| PX.Objects.PO | LandedCostTran+invoiceDate      |
| PX.Objects.PO | LandedCostTran+curyID           |
| PX.Objects.PO | LandedCostTran+curyInfolD       |
| PX.Objects.PO | LandedCostTran+curyLCAmount     |
| PX.Objects.PO | LandedCostTran+ICAmount         |
| PX.Objects.PO | LandedCostTran+inventoryID      |
| PX.Objects.PO | LandedCostTran+taxCategoryID    |
| PX.Objects.PO | LandedCostTran+taxID            |

| Namespace     | Name                                  |
|---------------|---------------------------------------|
| PX.Objects.PO | LandedCostTran+termsID                |
| PX.Objects.PO | LandedCostTran+processed              |
| PX.Objects.PO | LandedCostTran+postponeAP             |
| PX.Objects.PO | LandedCostTran+ICAccrualAcct          |
| PX.Objects.PO | LandedCostTran+ICAccrualSub           |
| PX.Objects.PO | LandedCostTran+aPCuryInfoID           |
| PX.Objects.PO | LandedCostTran+curyLCAPAmount         |
| PX.Objects.PO | LandedCostTran+ICAPAmount             |
| PX.Objects.PO | LandedCostTran+createdByID            |
| PX.Objects.PO | LandedCostTran+createdByScreenID      |
| PX.Objects.PO | LandedCostTran+createdDateTime        |
| PX.Objects.PO | LandedCostTran+lastModifiedByID       |
| PX.Objects.PO | LandedCostTran+lastModifiedByScreenID |
| PX.Objects.PO | LandedCostTran+lastModifiedDateTime   |
| PX.Objects.PO | LandedCostTran+Tstamp                 |
| PX.Objects.PO | LandedCostTran+justInserted           |
| PX.Objects.PO | LandedCostTran+lineCntr               |
| PX.Objects.PO | LandedCostTran+siteID                 |
| PX.Objects.PO | LandedCostTran+locationID             |

| Namespace     | Name                                      |
|---------------|---|
| PX.Objects.PO | LandedCostTran+iNDocCreated               |
| PX.Objects.PO | LandedCostTran+curyLCAPEffAmount          |
| PX.Objects.PO | LandedCostTran+amountSign                 |
| PX.Objects.PO | LandedCostTran+groupTranID                |
| PX.Objects.PO | LandedCostTranSource                      |
| PX.Objects.PO | LandedCostTranSplit+ICTranID              |
| PX.Objects.PO | LandedCostTranSplit+splitLineNbr          |
| PX.Objects.PO | LandedCostTranSplit+pOReceiptNbr          |
| PX.Objects.PO | LandedCostTranSplit+pOReceiptLineNbr      |
| PX.Objects.PO | LandedCostTranSplit+descr                 |
| PX.Objects.PO | LandedCostTranSplit+inventoryID           |
| PX.Objects.PO | LandedCostTranSplit+Tstamp                |
| PX.Objects.PO | LandedCostCode+applicationMethod          |
| PX.Objects.PO | LandedCostApplicationMethod               |
| PX.Objects.PO | LandedCostApplicationMethod+ListAttribute |
| PX.Objects.PO | POReceipt+isTaxValid                      |
| PX.Objects.PO | POReceipt+isUnbilledTaxValid              |
| PX.Objects.PO | POReceipt+curyLineTotal                   |
| PX.Objects.PO | POReceipt+lineTotal                       |

| Namespace     | Name                          |
|---------------|-------------------------------|
| PX.Objects.PO | POReceipt+curyDiscTot         |
| PX.Objects.PO | POReceipt+discTot             |
| PX.Objects.PO | POReceipt+curyUnbilledDiscTot |
| PX.Objects.PO | POReceipt+unbilledDiscTot     |
| PX.Objects.PO | POReceipt+docDisc             |
| PX.Objects.PO | POReceipt+curyDocDisc         |
| PX.Objects.PO | POReceipt+orderTotal          |
| PX.Objects.PO | POReceipt+curyTaxTotal        |
| PX.Objects.PO | POReceipt+taxTotal            |
| PX.Objects.PO | POReceipt+curyVatExemptTotal  |
| PX.Objects.PO | POReceipt+vatExemptTotal      |
| PX.Objects.PO | POReceipt+curyVatTaxableTotal |
| PX.Objects.PO | POReceipt+vatTaxableTotal     |
| PX.Objects.PO | POReceipt+taxZoneID           |
| PX.Objects.PO | POReceipt+termsID             |
| PX.Objects.PO | POReceipt+controlTotal        |
| PX.Objects.PO | POReceipt+curyDiscAmt         |
| PX.Objects.PO | POReceipt+discAmt             |
| PX.Objects.PO | POReceipt+dueDate             |

| Namespace     | Name                            |
|---------------|---------------------------------|
| PX.Objects.PO | POReceipt+discDate              |
| PX.Objects.PO | POReceipt+curyUnbilledTotal     |
| PX.Objects.PO | POReceipt+unbilledTotal         |
| PX.Objects.PO | POReceipt+curyUnbilledLineTotal |
| PX.Objects.PO | POReceipt+unbilledLineTotal     |
| PX.Objects.PO | POReceipt+curyUnbilledTaxTotal  |
| PX.Objects.PO | POReceipt+unbilledTaxTotal      |
| PX.Objects.PO | POReceipt+payToVendorID         |
| PX.Objects.PO | POReceiptLine+discPct           |
| PX.Objects.PO | POReceiptLine+curyDiscAmt       |
| PX.Objects.PO | POReceiptLine+discAmt           |
| PX.Objects.PO | POReceiptLine>manualDisc        |
| PX.Objects.PO | POReceiptLine+lineAmt           |
| PX.Objects.PO | POReceiptLine+curyDiscCost      |
| PX.Objects.PO | POReceiptLine+discCost          |
| PX.Objects.PO | POReceiptLine+curyExtCost       |
| PX.Objects.PO | POReceiptLine+extCost           |
| PX.Objects.PO | POReceiptLine+curyMultExtCost   |
| PX.Objects.PO | POReceiptLine+multExtCost       |

| Namespace     | Name                                  |
|---------------|---------------------------------------|
| PX.Objects.PO | POReceiptLine+taxCategoryID           |
| PX.Objects.PO | POReceiptLine+taxID                   |
| PX.Objects.PO | POReceiptLine+voucheredQty            |
| PX.Objects.PO | POReceiptLine+baseVoucheredQty        |
| PX.Objects.PO | POReceiptLine+curyVoucheredCost       |
| PX.Objects.PO | POReceiptLine+voucheredCost           |
| PX.Objects.PO | POReceiptLine+voucherStatus           |
| PX.Objects.PO | POReceiptLine+reversedBillPPVAmt      |
| PX.Objects.PO | POReceiptLine+curyUnbilledAmt         |
| PX.Objects.PO | POReceiptLine+unbilledAmt             |
| PX.Objects.PO | POReceiptLine+curyPOAccrualAmt        |
| PX.Objects.PO | POReceiptLine+pOAccrualAmt            |
| PX.Objects.PO | POReceiptLine+curyUnbilledDiscountAmt |
| PX.Objects.PO | POReceiptLine+unbilledDiscountAmt     |
| PX.Objects.PO | POReceiptLine+curyUnbilledExtCost     |
| PX.Objects.PO | POReceiptLine+unbilledExtCost         |
| PX.Objects.PO | POReceiptLine+discountID              |
| PX.Objects.PO | POReceiptLine+discountSequenceID      |
| PX.Objects.PO | POReceiptLine+freezeManualDisc        |

| Namespace     | Name                                |
|---------------|-------------------------------------|
| PX.Objects.PO | POReceiptTax+receiptNbr             |
| PX.Objects.PO | POReceiptTax+lineNbr                |
| PX.Objects.PO | POReceiptTax+taxID                  |
| PX.Objects.PO | POReceiptTax+taxRate                |
| PX.Objects.PO | POReceiptTax+curyInfold             |
| PX.Objects.PO | POReceiptTax+curyTaxableAmt         |
| PX.Objects.PO | POReceiptTax+curyUnbilledTaxableAmt |
| PX.Objects.PO | POReceiptTax+taxableAmt             |
| PX.Objects.PO | POReceiptTax+unbilledTaxableAmt     |
| PX.Objects.PO | POReceiptTax+curyTaxAmt             |
| PX.Objects.PO | POReceiptTax+curyUnbilledTaxAmt     |
| PX.Objects.PO | POReceiptTax+taxAmt                 |
| PX.Objects.PO | POReceiptTax+curyExpenseAmt         |
| PX.Objects.PO | POReceiptTax+unbilledTaxAmt         |
| PX.Objects.PO | POReceiptLCInfo+selected            |
| PX.Objects.PO | POReceiptLCInfo+receiptType         |
| PX.Objects.PO | POReceiptLCInfo+receiptNbr          |
| PX.Objects.PO | POReceiptLCInfo+vendorID            |
| PX.Objects.PO | POReceiptLCInfo+vendorLocationID    |

| Namespace     | Name  |
|---------------|---|
| PX.Objects.PO | POReceiptLCInfo+receiptDate                   |
| PX.Objects.PO | POReceiptLCInfo+curyID                        |
| PX.Objects.PO | POReceiptLCInfo+curyInfold                    |
| PX.Objects.PO | POReceiptLCInfo+curyOrderTotal                |
| PX.Objects.PO | POReceiptLCInfo+orderTotal                    |
| PX.Objects.PO | POReceiptLCInfo+ICTranTotal                   |
| PX.Objects.PO | POReceiptLCInfo+ICTranCount                   |
| PX.Objects.PO | POReceiptEntry+POOrderFilter+anyCurrency      |
| PX.Objects.PO | POReceiptEntry+POLineS+curyReceivedCost       |
| PX.Objects.PO | POReceiptEntry+POLineS+receivedCost           |
| PX.Objects.PO | POReceiptEntry+POLineS+closedQty              |
| PX.Objects.PO | POReceiptEntry+POLineS+curyClosedAmt          |
| PX.Objects.PO | POReceiptEntry+POOrderS+curyReceivedCost      |
| PX.Objects.PO | POReceiptEntry+POOrderS+receivedCost          |
| PX.Objects.PO | POReceiptEntry+POOrderS+isOpenTaxValid        |
| PX.Objects.PO | POReceiptEntry+POOrderS+curyLeftToReceiveCost |
| PX.Objects.PO | POReceiptEntry+POOrderS+leftToReceiveCost     |
| PX.Objects.PO | POReceiptEntry+POReceiptLineS+curyUnitCost    |
| PX.Objects.PO | POReceiptEntry+POReceiptLineS+curyExtCost     |



| Namespace     | Name  |
|---------------|---|
| PX.Objects.PO | POLineR+curyReceivedCost                      |
| PX.Objects.PO | POLineR+receivedCost                          |
| PX.Objects.PO | POLineUOpen+curyOpenAmt                       |
| PX.Objects.PO | POLineUOpen+openAmt                           |
| PX.Objects.PO | LandedCostProcess+NoApplicableSourceException |
| PX.Objects.PO | LandedCostHelper                              |
| PX.Objects.PO | LandedCostHelper+POReceiptLineAdjustment      |
| PX.Objects.PO | POLine+closedQty                              |
| PX.Objects.PO | POLine+curyClosedAmt                          |
| PX.Objects.PO | POLine+voucheredQty                           |
| PX.Objects.PO | POLine+baseVoucheredQty                       |
| PX.Objects.PO | POLine+curyVoucheredCost                      |
| PX.Objects.PO | POLine+voucheredCost                          |
| PX.Objects.PO | POLine+receivedCost                           |
| PX.Objects.PO | POLine+voucherStatus                          |
| PX.Objects.PO | POLine+curyOpenAmt                            |
| PX.Objects.PO | POLine+openAmt                                |
| PX.Objects.PO | POOrder+isOpenTaxValid                        |
| PX.Objects.PO | POOrder+curyOpenOrderTotal                    |

| Namespace     | Name                                   |
|---------------|--|
| PX.Objects.PO | POOrder+openOrderTotal                 |
| PX.Objects.PO | POOrder+curyOpenLineTotal              |
| PX.Objects.PO | POOrder+openLineTotal                  |
| PX.Objects.PO | POOrder+curyOpenTaxTotal               |
| PX.Objects.PO | POOrder+openTaxTotal                   |
| PX.Objects.PO | POTax+curyOpenTaxableAmt               |
| PX.Objects.PO | POTax+openTaxableAmt                   |
| PX.Objects.PO | POTax+curyOpenTaxAmt                   |
| PX.Objects.PO | POTax+openTaxAmt                       |
| PX.Objects.PO | POOpenTaxAttribute                     |
| PX.Objects.PO | POOpenTaxRAttribute                    |
| PX.Objects.PO | POReceiptTaxAttribute                  |
| PX.Objects.PO | POReceiptUnbilledTaxAttribute          |
| PX.Objects.PO | POReceiptUnbilledTaxRAttribute         |
| PX.Objects.PO | POOrderEntry+POLineS+curyReceivedCost  |
| PX.Objects.PO | POOrderEntry+POLineS+receivedCost      |
| PX.Objects.PO | POOrderEntry+POOrderS+curyReceivedCost |
| PX.Objects.PO | POOrderEntry+POOrderS+receivedCost     |
| PX.Objects.PO | POOrderEntry+POOrderS+openLineQty      |

| Namespace     | Name                                    |
|---------------|---|
| PX.Objects.PO | POOrderEntry+POOrderS+baseOpenLineQty   |
| PX.Objects.PO | POOrderEntry+POOrderS+curyOpenLineCost  |
| PX.Objects.PO | POOrderEntry+POOrderS+openLineCost      |
| PX.Objects.PO | POOrderEntry+POOrderS+isOpenTaxValid    |
| PX.Objects.TX | TXAvalaraMapping+branchID               |
| PX.Objects.TX | TXAvalaraMapping+companyCode            |
| PX.Objects.TX | TXAvalaraMapping+Tstamp                 |
| PX.Objects.TX | TXAvalaraMapping+createdByID            |
| PX.Objects.TX | TXAvalaraMapping+createdByScreenID      |
| PX.Objects.TX | TXAvalaraMapping+createdDateTime        |
| PX.Objects.TX | TXAvalaraMapping+lastModifiedByID       |
| PX.Objects.TX | TXAvalaraMapping+lastModifiedByScreenID |
| PX.Objects.TX | TXAvalaraMapping+lastModifiedDateTime   |
| PX.Objects.TX | TXAvalaraSetup+isActive                 |
| PX.Objects.TX | TXAvalaraSetup+account                  |
| PX.Objects.TX | TXAvalaraSetup+licence                  |
| PX.Objects.TX | TXAvalaraSetup+url                      |
| PX.Objects.TX | TXAvalaraSetup+sendRevenueAccount       |
| PX.Objects.TX | TXAvalaraSetup+showAllWarnings          |

| Namespace     | Name                                    |
|---------------|---|
| PX.Objects.TX | TXAvalaraSetup+enableLogging            |
| PX.Objects.TX | TXAvalaraSetup+timeout                  |
| PX.Objects.TX | TXAvalaraSetup+disableTaxCalculation    |
| PX.Objects.TX | TXAvalaraSetup+alwaysCheckAddress       |
| PX.Objects.TX | TXAvalaraSetup+showTaxDetails           |
| PX.Objects.TX | TXAvalaraSetup+disableAddressValidation |
| PX.Objects.TX | TXAvalaraSetup+addressInUppercase       |
| PX.Objects.TX | TXAvalaraSetup+isInclusiveTax           |
| PX.Objects.TX | TXAvalaraSetup+Tstamp                   |
| PX.Objects.TX | TXAvalaraSetup+createdByID              |
| PX.Objects.TX | TXAvalaraSetup+createdByScreenID        |
| PX.Objects.TX | TXAvalaraSetup+createdDateTime          |
| PX.Objects.TX | TXAvalaraSetup+lastModifiedByID         |
| PX.Objects.TX | TXAvalaraSetup+lastModifiedByScreenID   |
| PX.Objects.TX | TXAvalaraSetup+lastModifiedDateTime     |
| PX.Objects.SO | SOInvoice+curyTaxTotal                  |
| PX.Objects.SO | SOInvoice+taxTotal                      |
| PX.Objects.SO | SOInvoice+curyLineTotal                 |
| PX.Objects.SO | SOInvoice+lineTotal                     |

| Namespace     | Name                                 |
|---------------|--------------------------------------|
| PX.Objects.SO | SOInvoice+curyPremiumFreightAmt      |
| PX.Objects.SO | SOInvoice+premiumFreightAmt          |
| PX.Objects.SO | SOInvoice+curyFreightCost            |
| PX.Objects.SO | SOInvoice+freightCost                |
| PX.Objects.SO | SOInvoice+curyFreightAmt             |
| PX.Objects.SO | SOInvoice+freightAmt                 |
| PX.Objects.SO | SOInvoice+curyFreightTot             |
| PX.Objects.SO | SOInvoice+freightTot                 |
| PX.Objects.SO | SOInvoice+curyMiscTot                |
| PX.Objects.SO | SOInvoice+miscTot                    |
| PX.Objects.SO | SOInvoice+curyDiscTot                |
| PX.Objects.SO | SOInvoice+discTot                    |
| PX.Objects.SO | SOInvoiceDiscountDetail+lineNbr      |
| PX.Objects.SO | SOInvoiceDiscountDetail+skipDiscount |
| PX.Objects.SO | SOInvoiceDiscountDetail+tranType     |
| PX.Objects.SO | SOInvoiceDiscountDetail+refNbr       |
| PX.Objects.SO | SOInvoiceDiscountDetail+orderType    |
| PX.Objects.SO | SOInvoiceDiscountDetail+orderNbr     |
| PX.Objects.SO | SOInvoiceDiscountDetail+discountID   |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.SO | SOInvoiceDiscountDetail+discountSequenceID     |
| PX.Objects.SO | SOInvoiceDiscountDetail+type                   |
| PX.Objects.SO | SOInvoiceDiscountDetail+curyInfolD             |
| PX.Objects.SO | SOInvoiceDiscountDetail+discountableAmt        |
| PX.Objects.SO | SOInvoiceDiscountDetail+curyDiscountableAmt    |
| PX.Objects.SO | SOInvoiceDiscountDetail+discountableQty        |
| PX.Objects.SO | SOInvoiceDiscountDetail+discountAmt            |
| PX.Objects.SO | SOInvoiceDiscountDetail+curyDiscountAmt        |
| PX.Objects.SO | SOInvoiceDiscountDetail+discountPct            |
| PX.Objects.SO | SOInvoiceDiscountDetail+freeltemID             |
| PX.Objects.SO | SOInvoiceDiscountDetail+freeltemQty            |
| PX.Objects.SO | SOInvoiceDiscountDetail+isManual               |
| PX.Objects.SO | SOInvoiceDiscountDetail+Tstamp                 |
| PX.Objects.SO | SOInvoiceDiscountDetail+createdByID            |
| PX.Objects.SO | SOInvoiceDiscountDetail+createdByScreenID      |
| PX.Objects.SO | SOInvoiceDiscountDetail+createdDateTime        |
| PX.Objects.SO | SOInvoiceDiscountDetail+lastModifiedByID       |
| PX.Objects.SO | SOInvoiceDiscountDetail+lastModifiedByScreenID |
| PX.Objects.SO | SOInvoiceDiscountDetail+lastModifiedDateTime   |

| Namespace     | Name                                |
|---------------|-------------------------------------|
| PX.Objects.SO | SOSetup+promoLineDisc               |
| PX.Objects.SO | SOSetup+promoDocDisc                |
| PX.Objects.SO | SOShipLine+detDiscIDC1              |
| PX.Objects.SO | SOShipLine+detDiscSeqIDC1           |
| PX.Objects.SO | SOShipLine+detDiscIDC2              |
| PX.Objects.SO | SOShipLine+detDiscSeqIDC2           |
| PX.Objects.SO | SOShipLine+detDiscApp               |
| PX.Objects.SO | SOShipLine+docDiscIDC1              |
| PX.Objects.SO | SOShipLine+docDiscSeqIDC1           |
| PX.Objects.SO | SOShipLine+docDiscIDC2              |
| PX.Objects.SO | SOShipLine+docDiscSeqIDC2           |
| PX.Objects.SO | SOLine+detDiscIDC1                  |
| PX.Objects.SO | SOLine+detDiscSeqIDC1               |
| PX.Objects.SO | SOLine+detDiscIDC2                  |
| PX.Objects.SO | SOLine+detDiscSeqIDC2               |
| PX.Objects.SO | SOLine+detDiscApp                   |
| PX.Objects.SO | SOLine+promoDiscID                  |
| PX.Objects.SO | SOLine+PromoDiscIDSelectorAttribute |
| PX.Objects.SO | SOLine+docDiscIDC1                  |

| Namespace     | Name                                      |
|---------------|---|
| PX.Objects.SO | SOLine+docDiscSeqIDC1                     |
| PX.Objects.SO | SOLine+docDiscIDC2                        |
| PX.Objects.SO | SOLine+docDiscSeqIDC2                     |
| PX.Objects.SO | SOManualDiscMode                          |
| PX.Objects.SO | BqllInterface                             |
| PX.Objects.SO | DiscountedLine                            |
| PX.Objects.SO | DiscountedLine+curyDiscAmt                |
| PX.Objects.SO | DiscountedLine+discPct                    |
| PX.Objects.SO | DiscountedLine<FieldDiscAmt,FieldDiscPct> |
| PX.Objects.SO | SODiscountEngine+SingleDiscountResult     |
| PX.Objects.SO | SODiscountEngine+DiscountResult           |
| PX.Objects.SO | SODiscountEngine+DiscountSetup            |
| PX.Objects.SO | SODiscountEngine<Line>                    |
| PX.Objects.SO | IDisableable                              |
| PX.Objects.SO | SOMiscLine2+detDiscIDC1                   |
| PX.Objects.SO | SOMiscLine2+detDiscSeqIDC1                |
| PX.Objects.SO | SOMiscLine2+detDiscIDC2                   |
| PX.Objects.SO | SOMiscLine2+detDiscSeqIDC2                |
| PX.Objects.SO | SOMiscLine2+detDiscApp                    |



| Namespace                | Name                                |
|--------------------------|-------------------------------------|
| PX.Objects.SO            | SOMiscLine2+docDisclDC1             |
| PX.Objects.SO            | SOMiscLine2+docDiscSeqIDC1          |
| PX.Objects.SO            | SOMiscLine2+docDisclDC2             |
| PX.Objects.SO            | SOMiscLine2+docDiscSeqIDC2          |
| PX.Objects.DR            | DRFinPeriodSelection+startPeriodID  |
| PX.Objects.DR            | DRFinPeriodSelection+endPeriodID    |
| PX.Objects.DR            | DRFirstPeriodOfYearDefaultAttribute |
| PX.Objects.DR            | DRLastPeriodOfYearDefaultAttribute  |
| PX.Objects.DR.Descriptor | IFinancialPeriodProvider            |
| PX.Objects.DR.Descriptor | FinancialPeriodProvider             |
| PX.Objects.GL            | BudgetFilter+repLedgerID            |
| PX.Objects.GL            | BudgetFilter+repFinYear             |
| PX.Objects.GL            | CuryGLHistory+ledgerID              |
| PX.Objects.GL            | CuryGLHistory+branchID              |
| PX.Objects.GL            | CuryGLHistory+accountID             |
| PX.Objects.GL            | CuryGLHistory+subID                 |
| PX.Objects.GL            | CuryGLHistory+finPeriodID           |
| PX.Objects.GL            | CuryGLHistory+finYear               |
| PX.Objects.GL            | CuryGLHistory+balanceType           |

| Namespace     | Name                             |
|---------------|----------------------------------|
| PX.Objects.GL | CuryGLHistory+curyID             |
| PX.Objects.GL | CuryGLHistory+detDeleted         |
| PX.Objects.GL | CuryGLHistory+finPtdCredit       |
| PX.Objects.GL | CuryGLHistory+finPtdDebit        |
| PX.Objects.GL | CuryGLHistory+finYtdBalance      |
| PX.Objects.GL | CuryGLHistory+finBegBalance      |
| PX.Objects.GL | CuryGLHistory+tranPtdCredit      |
| PX.Objects.GL | CuryGLHistory+tranPtdDebit       |
| PX.Objects.GL | CuryGLHistory+tranYtdBalance     |
| PX.Objects.GL | CuryGLHistory+tranBegBalance     |
| PX.Objects.GL | CuryGLHistory+curyFinPtdCredit   |
| PX.Objects.GL | CuryGLHistory+curyFinPtdDebit    |
| PX.Objects.GL | CuryGLHistory+curyFinYtdBalance  |
| PX.Objects.GL | CuryGLHistory+curyFinBegBalance  |
| PX.Objects.GL | CuryGLHistory+curyTranPtdCredit  |
| PX.Objects.GL | CuryGLHistory+curyTranPtdDebit   |
| PX.Objects.GL | CuryGLHistory+curyTranYtdBalance |
| PX.Objects.GL | CuryGLHistory+curyTranBegBalance |
| PX.Objects.GL | CuryGLHistory+Tstamp             |

| Namespace     | Name                     |
|---------------|--------------------------|
| PX.Objects.GL | CuryGLHistory+baseCuryID |
| PX.Objects.GL | FiscalPeriodUtils        |
| PX.Objects.GL | FinPeriod+selected       |
| PX.Objects.GL | FinPeriod+finPeriodID    |
| PX.Objects.GL | FinPeriod+startDate      |
| PX.Objects.GL | FinPeriod+endDate        |
| PX.Objects.GL | FinPeriod+finDate        |
| PX.Objects.GL | FinPeriod+descr          |
| PX.Objects.GL | FinPeriod+closed         |
| PX.Objects.GL | FinPeriod+aPClosed       |
| PX.Objects.GL | FinPeriod+aRClosed       |
| PX.Objects.GL | FinPeriod+iNClosed       |
| PX.Objects.GL | FinPeriod+cAClosed       |
| PX.Objects.GL | FinPeriod+fAClosed       |
| PX.Objects.GL | FinPeriod+dateLocked     |
| PX.Objects.GL | FinPeriod+active         |
| PX.Objects.GL | FinPeriod+periodNbr      |
| PX.Objects.GL | FinPeriod+finYear        |
| PX.Objects.GL | FinPeriod+Tstamp         |

| Namespace     | Name                             |
|---------------|----------------------------------|
| PX.Objects.GL | FinPeriod+noteID                 |
| PX.Objects.GL | FinPeriod+createdByID            |
| PX.Objects.GL | FinPeriod+createdByScreenID      |
| PX.Objects.GL | FinPeriod+createdDateTime        |
| PX.Objects.GL | FinPeriod+lastModifiedByID       |
| PX.Objects.GL | FinPeriod+lastModifiedByScreenID |
| PX.Objects.GL | FinPeriod+lastModifiedDateTime   |
| PX.Objects.GL | FinPeriod+startDateUI            |
| PX.Objects.GL | FinPeriod+endDateUI              |
| PX.Objects.GL | FinPeriod+custom                 |
| PX.Objects.GL | FinPeriod+length                 |
| PX.Objects.GL | FinPeriod+isAdjustment           |
| PX.Objects.GL | FinYear+year                     |
| PX.Objects.GL | FinYear+startDate                |
| PX.Objects.GL | FinYear+endDate                  |
| PX.Objects.GL | FinYear+finPeriods               |
| PX.Objects.GL | FinYear+customPeriods            |
| PX.Objects.GL | FinYear+begFinYearHist           |
| PX.Objects.GL | FinYear+periodsStartDateHist     |

| Namespace                          | Name                                    |
|------------------------------------|---|
| PX.Objects.GL                      | FinYear+notelD                          |
| PX.Objects.GL                      | FinYear+Tstamp                          |
| PX.Objects.GL                      | FinYear+createdByID                     |
| PX.Objects.GL                      | FinYear+createdByScreenID               |
| PX.Objects.GL                      | FinYear+createdDateTime                 |
| PX.Objects.GL                      | FinYear+lastModifiedByID                |
| PX.Objects.GL                      | FinYear+lastModifiedByScreenID          |
| PX.Objects.GL                      | FinYear+lastModifiedDateTime            |
| PX.Objects.GL.CacheExtensions      | PayrollStubForInvalidEndpoints          |
| PX.Objects.GL.CacheExtensions      | PayrollStubForInvalidEndpoints+pRClosed |
| PX.Objects.GL.Overrides.PostGraph  | CuryAcctHist+finYear                    |
| PX.Objects.GL.Overrides.PostGraph  | CuryAcctHist+detDeleted                 |
| PX.Objects.GL.Overrides.CloseGraph | BatchCopy+origBatchNbr                  |
| PX.Objects.GL.Overrides.CloseGraph | BatchCopy+origModule                    |
| PX.Objects.GL.Overrides.CloseGraph | BatchCopy+autoReverseCopy               |
| PX.Objects.GL.Overrides.CloseGraph | AHAccumAttribute                        |
| PX.Objects.GL.Overrides.CloseGraph | AcctHist+finYear                        |
| PX.Objects.GL.Overrides.CloseGraph | CuryAcctHist+ledgerID                   |
| PX.Objects.GL.Overrides.CloseGraph | CuryAcctHist+baseCuryID                 |

| Namespace                          | Name   |
|------------------------------------|--|
| PX.Objects.GL.Overrides.CloseGraph | CuryAcctHist+finYear                           |
| PX.Objects.EP                      | WingmanUser<Operand>                           |
| PX.Objects.EP                      | EPEmployeeRateByProject+rateID                 |
| PX.Objects.EP                      | EPEmployeeRateByProject+line                   |
| PX.Objects.EP                      | EPEmployeeRateByProject+projectID              |
| PX.Objects.EP                      | EPEmployeeRateByProject+taskID                 |
| PX.Objects.EP                      | EPEmployeeRateByProject+hourlyRate             |
| PX.Objects.EP                      | EPEmployeeRateByProject+Tstamp                 |
| PX.Objects.EP                      | EPEmployeeRateByProject+createdByID            |
| PX.Objects.EP                      | EPEmployeeRateByProject+createdByScreenID      |
| PX.Objects.EP                      | EPEmployeeRateByProject+createdDateTime        |
| PX.Objects.EP                      | EPEmployeeRateByProject+lastModifiedByID       |
| PX.Objects.EP                      | EPEmployeeRateByProject+lastModifiedByScreenID |
| PX.Objects.EP                      | EPEmployeeRateByProject+lastModifiedDateTime   |
| PX.Objects.EP                      | EPEmployeeRate+rateID                          |
| PX.Objects.EP                      | EPEmployeeRate+employeeID                      |
| PX.Objects.EP                      | EPEmployeeRate+effectiveDate                   |
| PX.Objects.EP                      | EPEmployeeRate+rateType                        |
| PX.Objects.EP                      | EPEmployeeRate+hourlyRate                      |

| Namespace     | Name                                  |
|---------------|---------------------------------------|
| PX.Objects.EP | EPEmployeeRate+regularHours           |
| PX.Objects.EP | EPEmployeeRate+annualSalary           |
| PX.Objects.EP | EPEmployeeRate+Tstamp                 |
| PX.Objects.EP | EPEmployeeRate+createdByID            |
| PX.Objects.EP | EPEmployeeRate+createdByScreenID      |
| PX.Objects.EP | EPEmployeeRate+createdDateTime        |
| PX.Objects.EP | EPEmployeeRate+lastModifiedByID       |
| PX.Objects.EP | EPEmployeeRate+lastModifiedByScreenID |
| PX.Objects.EP | EPEmployeeRate+lastModifiedDateTime   |
| PX.Objects.EP | Approver<Operand>                     |
| PX.Objects.EP | EPSetup+postToOffBalance              |
| PX.Objects.CS | IAddressValidationService             |
| PX.Objects.CS | PXAddressValidator+Fields             |
| PX.Objects.CS | AvalaraAddressValidator               |
| PX.Objects.CS | Country+addressVerificationTypeName   |
| PX.Objects.CR | CRQuote+revisionID                    |
| PX.Objects.CR | CRQuote+defRevisionID                 |
| PX.Objects.CR | CRQuote+revisionOpportunityID         |
| PX.Objects.CR | CRQuote+revisionRevisionID            |

| Namespace     | Name                                      |
|---------------|---|
| PX.Objects.CR | CRopportunityDiscountDetail+opportunityID |
| PX.Objects.CR | CRopportunityDiscountDetail+revisionID    |
| PX.Objects.CR | BqlSetup<Field>                           |
| PX.Objects.CR | CRMarketingList+noFax                     |
| PX.Objects.CR | CRMarketingList+noMail                    |
| PX.Objects.CR | CRMarketingList+noMarketing               |
| PX.Objects.CR | CRMarketingList+noCall                    |
| PX.Objects.CR | CRMarketingList+noEMail                   |
| PX.Objects.CR | CRMarketingList+noMassMail                |
| PX.Objects.CR | CRopportunityProducts+opportunityID       |
| PX.Objects.CR | CRopportunityProducts+revisionID          |
| PX.Objects.CR | CRopportunityProducts+detDiscIDC1         |
| PX.Objects.CR | CRopportunityProducts+detDiscSeqIDC1      |
| PX.Objects.CR | CRopportunityProducts+detDiscIDC2         |
| PX.Objects.CR | CRopportunityProducts+detDiscSeqIDC2      |
| PX.Objects.CR | CRopportunityProducts+detDiscApp          |
| PX.Objects.CR | CRopportunityProducts+docDiscIDC1         |
| PX.Objects.CR | CRopportunityProducts+docDiscSeqIDC1      |
| PX.Objects.CR | CRopportunityProducts+docDiscIDC2         |



| Namespace                | Name                                  |
|--------------------------|---------------------------------------|
| PX.Objects.CR            | CROpportunityProducts+docDiscSeqIDC2  |
| PX.Objects.CR            | CROpportunityTax+opportunityID        |
| PX.Objects.CR            | CROpportunityTax+revisionID           |
| PX.Objects.CR            | CRTaxTran+opportunityID               |
| PX.Objects.CR            | CRTaxTran+revisionID                  |
| PX.Objects.CR            | CROpportunity+primaryQuoteNbr         |
| PX.Objects.CR            | CROpportunity+revisionCntr            |
| PX.Objects.CR            | CROpportunity+defRevisionID           |
| PX.Objects.CR            | CROpportunity+revisionOpportunityID   |
| PX.Objects.CR            | CROpportunity+revisionID              |
| PX.Objects.CR.Standalone | CROpportunity+revisionCntr            |
| PX.Objects.CR.Standalone | CROpportunity+defRevisionID           |
| PX.Objects.CR.Standalone | CROpportunityRevision+revisionID      |
| PX.Objects.CR.Standalone | CROpportunityRevision+primaryQuoteNbr |
| PX.Objects.CR.Standalone | CRQuote+opportunityID                 |
| PX.Objects.CR.Standalone | CRQuote+revisionID                    |
| PX.Objects.CA            | CashFlowEnq+CashFlowFilter+accountID  |
| PX.Objects.CA            | CashTransferEntry+TransferView        |
| PX.Objects.CA            | CashTransferEntry+TransferSelect      |

| Namespace         | Name  |
|-------------------|---|
| PX.Objects.CA     | PaymentMethod+aPAllowInstances                    |
| PX.Objects.Common | PXOrderedSelect<Primary,Table,Where,OrderBy>      |
| PX.Objects.Common | PXOrderedSelect<Primary,Table,Join,Where,OrderBy> |
| PX.Objects.Common | PXOrderedSelectBase<Primary,Table>                |
| PX.Objects.Common | ISortOrder  |
| PX.Objects.Common | ProcessingResult+Message                          |
| PX.Objects.AR     | ARClosedPeriodAttribute                           |
| PX.Objects.AR     | ARRegister+discTot                                |
| PX.Objects.AR     | ARRegister+curyDiscTot                            |
| PX.Objects.AR     | ARTran+detDiscIDC1                                |
| PX.Objects.AR     | ARTran+detDiscSeqIDC1                             |
| PX.Objects.AR     | ARTran+detDiscIDC2                                |
| PX.Objects.AR     | ARTran+detDiscSeqIDC2                             |
| PX.Objects.AR     | ARTran+detDiscApp                                 |
| PX.Objects.AR     | ARTran+docDiscIDC1                                |
| PX.Objects.AR     | ARTran+docDiscSeqIDC1                             |
| PX.Objects.AR     | ARTran+docDiscIDC2                                |
| PX.Objects.AR     | ARTran+docDiscSeqIDC2                             |
| PX.Objects.AR     | BqllInterfaceDE                                   |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.AR | DiscountLineFields   |
| PX.Objects.AR | DiscountLineFields+skipDisc  |
| PX.Objects.AR | DiscountLineFields+curyDiscAmt   |
| PX.Objects.AR | DiscountLineFields+discPct   |
| PX.Objects.AR | DiscountLineFields+discountID  |
| PX.Objects.AR | DiscountLineFields+discountSequenceID  |
| PX.Objects.AR | DiscountLineFields+manualDisc  |
| PX.Objects.AR | DiscountLineFields+manualPrice   |
| PX.Objects.AR | DiscountLineFields+lineType  |
| PX.Objects.AR | DiscountLineFields+isFree  |
| PX.Objects.AR | DiscountLineFields<SkipDiscField,CuryDiscAmtField,DiscPctField,DiscountIDField,DiscountSequenceIDField,ManualDiscField,ManualPriceField,LineTypeField,IsFreeField> |
| PX.Objects.AR | AmountLineFields   |
| PX.Objects.AR | AmountLineFields+quantity  |
| PX.Objects.AR | AmountLineFields+curyUnitPrice   |
| PX.Objects.AR | AmountLineFields+curyExtPrice  |
| PX.Objects.AR | AmountLineFields+curyLineAmount  |
| PX.Objects.AR | AmountLineFields+uOM   |
| PX.Objects.AR | AmountLineFields+groupDiscountRate   |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.AR | AmountLineFields+documentDiscountRate  |
| PX.Objects.AR | AmountLineFields+taxCategoryID   |
| PX.Objects.AR | AmountLineFields+freezeManualDisc  |
| PX.Objects.AR | AmountLineFields<QuantityField,CuryUnitPriceField,CuryExtPriceField,CuryLineAmountField,UOMField,GroupDiscountRateField,DocumentDiscountRateField,FreezeManualDiscField>                               |
| PX.Objects.AR | AmountLineFields<QuantityField,CuryUnitPriceField,CuryExtPriceField,CuryLineAmountField,UOMField,GroupDiscountRateField,DocumentDiscountRateField>   |
| PX.Objects.AR | RetainedAmountLineFields<QuantityField,CuryUnitPriceField,CuryExtPriceField,CuryLineAmountField,CuryRetainageAmtField,UOMField,GroupDiscountRateField,DocumentDiscountRateField,FreezeManualDiscField> |
| PX.Objects.AR | RetainedAmountLineFields<QuantityField,CuryUnitPriceField,CuryExtPriceField,CuryLineAmountField,CuryRetainageAmtField,UOMField,GroupDiscountRateField,DocumentDiscountRateField>                       |
| PX.Objects.AR | LineEntitiesFields   |
| PX.Objects.AR | LineEntitiesFields+inventoryID   |
| PX.Objects.AR | LineEntitiesFields+customerID  |
| PX.Objects.AR | LineEntitiesFields+siteID  |
| PX.Objects.AR | LineEntitiesFields+branchID  |
| PX.Objects.AR | LineEntitiesFields+vendorID  |
| PX.Objects.AR | LineEntitiesFields<InventoryField,CustomerField,SiteField,BranchField,VendorField>   |
| PX.Objects.AR | LineEntitiesFields<InventoryField,CustomerField,SiteField,BranchField,VendorField,SuppliedByVendorField>   |

| Namespace     | Name  |
|---------------|---|
| PX.Objects.AR | DiscountEngine  |
| PX.Objects.AR | DiscountEngine+DCCache  |
| PX.Objects.AR | DiscountEngine+DECACHE<TableType>                                   |
| PX.Objects.AR | DiscountEngine+DiscountDetailToLineCorrelation<DiscountDetail,Line> |
| PX.Objects.AR | ConcurrentDictionaryEx  |
| PX.Objects.AR | DiscountEngine<Line>  |
| PX.Objects.AR | DiscountEngine<Line>+UnitPriceVal                                   |
| PX.Objects.AR | ApplicableToCombination   |
| PX.Objects.AR | DiscountCode  |
| PX.Objects.AR | DiscountSequenceKey   |
| PX.Objects.AR | DiscountDetailLine  |
| PX.Objects.AR | DiscountableValues  |
| PX.Objects.AR | DiscountResult  |
| PX.Objects.AR | RecalcDiscountsParamFilter+recalcTarget                             |
| PX.Objects.AR | RecalcDiscountsParamFilter+recalcUnitPrices                         |
| PX.Objects.AR | RecalcDiscountsParamFilter+overrideManualPrices                     |
| PX.Objects.AR | RecalcDiscountsParamFilter+recalcDiscounts                          |
| PX.Objects.AR | RecalcDiscountsParamFilter+overrideManualDiscounts                  |
| PX.Objects.AR | RecalcDiscountsParamFilter+useRecalcFilter                          |

| Namespace                | Name                             |
|--------------------------|----------------------------------|
| PX.Objects.AR            | DiscountType                     |
| PX.Objects.AR            | DiscountType+ListAttribute       |
| PX.Objects.AR            | DiscountOption                   |
| PX.Objects.AR            | DiscountOption+ListAttribute     |
| PX.Objects.AR            | BreakdownType                    |
| PX.Objects.AR            | BreakdownType+ListAttribute      |
| PX.Objects.AR            | DiscountTarget                   |
| PX.Objects.AR            | IDiscountDetail                  |
| PX.Objects.AR            | ManualDiscountMode               |
| PX.Objects.AR.Standalone | ARRegisterAlias2+discTot         |
| PX.Objects.AR.Standalone | ARRegisterAlias2+curyDiscTot     |
| PX.Objects.AR.Standalone | ARRegisterAlias+discTot          |
| PX.Objects.AR.Standalone | ARRegisterAlias+curyDiscTot      |
| PX.Objects.AP            | APInvoiceLCInfo+selected         |
| PX.Objects.AP            | APInvoiceLCInfo+docType          |
| PX.Objects.AP            | APInvoiceLCInfo+refNbr           |
| PX.Objects.AP            | APInvoiceLCInfo+vendorID         |
| PX.Objects.AP            | APInvoiceLCInfo+vendorLocationID |
| PX.Objects.AP            | APInvoiceLCInfo+docDate          |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.AP | APIInvoiceLCInfo+curyID  |
| PX.Objects.AP | APIInvoiceLCInfo+curyInfoID                                    |
| PX.Objects.AP | APIInvoiceLCInfo+curyDocAmount                                 |
| PX.Objects.AP | APIInvoiceLCInfo+docAmount                                     |
| PX.Objects.AP | APIInvoiceLCInfo+curyLCTranTotal                               |
| PX.Objects.AP | APIInvoiceLCInfo+ICTranTotal                                   |
| PX.Objects.AP | APIInvoiceLCInfo+ICTranCount                                   |
| PX.Objects.AP | APIInvoiceEntry+LandedCostTranR+selected                       |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineComparer                           |
| PX.Objects.AP | APIInvoiceEntry+POLineComparer                                 |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptCuryInfoID              |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptAmount                  |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptCuryAmount              |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptCuryUnbilledAmt         |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptUnbilledAmt             |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptCuryUnbilledDiscountAmt |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptUnbilledDiscountAmt     |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptTotalCuryUnbilledAmount |
| PX.Objects.AP | APIInvoiceEntry+LinkLineReceipt+receiptTotalUnbilledAmount     |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderBilledQty       |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderBaseBilledQty   |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderCuryBilledAmt   |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderBilledAmt       |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderUnbilledQty     |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderBaseUnbilledQty |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderCuryUnbilledAmt |
| PX.Objects.AP | APIInvoiceEntry+LinkLineOrder+orderUnbilledAmt     |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+selected                |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+receiptNbr              |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+receiptType             |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+vendorID                |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+vendorLocationID        |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+receiptDate             |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+hold                    |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+released                |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+curyID                  |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+voucheredQty            |
| PX.Objects.AP | APIInvoiceEntry+POReceiptS+curyInfoID              |



| Namespace     | Name  |
|---------------|---|
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+curyVoucheredCost           |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+voucheredCost               |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+unbilledQtyL                |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+curyUnbilledAmtL            |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+unbilledAmt                 |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+vendorID_Vendor_acctName    |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+curyOrderTotal              |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+orderTotal                  |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+orderQty                    |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+curyLineTotal               |
| PX.Objects.AP | APIInvoiceEntry+PORceiptS+lineTotal                   |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+curyUnbilledAmt         |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+curyUnbilledDiscountAmt |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+orderCuryInfolD         |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+curyOrderLineAmt        |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+orderLineAmt            |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+curyOrderDiscAmt        |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+orderDiscAmt            |
| PX.Objects.AP | APIInvoiceEntry+PORceiptLineS+unbilledDiscountAmt     |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.AP | APIInvoiceEntry+POReceiptLineS+unbilledAmt                   |
| PX.Objects.AP | APIInvoiceEntry+POReceiptLineS+totalCuryUnbilledAmount       |
| PX.Objects.AP | APIInvoiceEntry+POReceiptLineS+totalUnbilledAmount           |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+orderType                          |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+orderNbr                           |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+hold                               |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+cancelled                          |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+receipt                            |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+curyLeftToBillCost                 |
| PX.Objects.AP | APIInvoiceEntry+POOrderRS+leftToReceiveQty                   |
| PX.Objects.AP | APIInvoiceEntry+POLineS+orderUnbilledQty                     |
| PX.Objects.AP | APIInvoiceEntry+POLineS+orderBaseUnbilledQty                 |
| PX.Objects.AP | APIInvoiceEntry+POLineS+orderCuryUnbilledAmt                 |
| PX.Objects.AP | APIInvoiceEntry+POLineS+orderUnbilledAmt                     |
| PX.Objects.AP | APIInvoiceEntryRetainage+ResetProjectOnAccountChangeDelegate |
| PX.Objects.AP | APPayment+lineCntr   |
| PX.Objects.AP | APTran+ICTranID  |
| PX.Objects.AP | APClosedPeriodAttribute                                      |
| PX.Objects.AP | LCTranVendorRefNbrAttribute                                  |

| Namespace | Name                                 |
|-----------|--------------------------------------|
| PX.TM     | EPCompanyTree+wseCalendarTime        |
| PX.CS     | CSNewAttribute+dummy                 |
| PX.CS     | RenumberingFilter+maskLenght         |
| PX.SM     | AUScreenActionState+stateID          |
| PX.SM     | AUScreenActionState+actionID         |
| PX.SM     | AUScreenActionState+dataMember       |
| PX.SM     | AUScreenActionState+isTopLevel       |
| PX.SM     | AUScreenActionState+sequence         |
| PX.SM     | AUScreenActionState+isEnabled        |
| PX.SM     | AUScreenActionState+enableCondition  |
| PX.SM     | AUScreenActionState+isVisible        |
| PX.SM     | AUScreenActionState+visibleCondition |
| PX.SM     | AUScreenConditionState+stateID       |
| PX.SM     | AUScreenPopupFieldDefault            |
| PX.SM     | AUDataType                           |
| PX.SM     | AUStorageType                        |
| PX.SM     | DashBaseDescription+filters          |
| PX.SM     | UploadFile+sourcePassword            |
| PX.SM     | WikiRevision+hold                    |

| Namespace                               | Name  |
|---|---|
| PX.Data                                 | PXFilterWizzard<Table,Primary,State>  |
| PX.Data                                 | Aggregate<Function>   |
| PX.Data                                 | Current<Field>+NoDefault  |
| PX.Data                                 | Optional<Field>+NoDefault   |
| PX.Data.EP                              | ActivityService+Total+wewCount  |
| PX.Data.SQLTree                         | Constant  |
| PX.Data.SQLTree                         | ProjectionItem  |
| PX.Data.SQLTree                         | ProjectionConst   |
| PX.Data.SQLTree                         | ProjectionReferenceEnumerable   |
| PX.Data.SQLTree                         | ProjectionReference   |
| PX.Data.SQLTree                         | ProjectionMember  |
| PX.Data.SQLTree                         | ProjectionNew   |
| PX.Data.SQLTree                         | SQLExpressionContracts  |
| PX.Data.ReferentialIntegrity.Attributes | Field<TBqlFieldOfChildTable>+IsRelatedTo<TBqlFieldOfParentTable>+AsSimpleKey+WithParentOf<TParentTable>                                 |
| PX.Data.ReferentialIntegrity.Attributes | Field<TBqlFieldOfChildTable>+IsRelatedTo<TBqlFieldOfParentTable>+AsSimpleKey+WithParentOf<TParentTable>+<br>WithChildrenOf<TChildTable> |
| PX.Data.ReferentialIntegrity.Attributes | Field<TBqlFieldOfChildTable>+IsRelatedTo<TBqlFieldOfParentTable>+AsSimpleKey+WithChildrenOf<TChildTable>                                |

| Namespace                               | Name  |
|---|---|
| PX.Data.ReferentialIntegrity.Attributes | Field<TBqIFieldOfChildTable>+IsRelatedTo<TBqIFieldOfParentTable>+AsSimpleKey+WithChildrenOf<TChildTable>+WithParentOf<TParentTable> |
| PX.Data.ReferentialIntegrity.Attributes | KeysRelation<TSelf>   |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2>+WithParentOf<TParentTable>  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2>+WithParentOf<TParentTable>+WithChildrenOf<TChildTable>                              |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2>+WithChildrenOf<TChildTable>   |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2>+WithChildrenOf<TChildTable>+WithParentOf<TParentTable>                              |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3>+WithParentOf<TParentTable>   |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3>+WithParentOf<TParentTable>+WithChildrenOf<TChildTable>             |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3>+WithChildrenOf<TChildTable>  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3>+WithChildrenOf<TChildTable>+WithParentOf<TParentTable>             |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4>+WithParentOf<TParentTable>                        |

| Namespace                               | Name   |
|---|--|
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4>+WithParentOf<TParentTable><br>+WithChildrenOf<TChildTable>                               |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4>+WithChildrenOf<TChildTable>  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4>+WithChildrenOf<TChildTable><br>+WithParentOf<TParentTable>                               |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5>+WithParentOf<TParentTable>  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5>+WithParentOf<TParentTable>+WithChildrenOf<TChildTable>                  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5>+WithChildrenOf<TChildTable>   |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5>+WithChildrenOf<TChildTable>+WithParentOf<TParentTable>                  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6>+WithParentOf<TParentTable>                             |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6>+WithParentOf<TParentTable>+WithChildrenOf<TChildTable> |

| Namespace                               | Name   |
|---|--|
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6>+WithChildrenOf<TChildTable>  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6>+WithChildrenOf<TChildTable>+WithParentOf<TParentTable>                                   |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7>+WithParentOf<TParentTable>  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7>+WithParentOf<TParentTable>+WithChildrenOf<TChildTable>                  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7>+WithChildrenOf<TChildTable>   |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7>+WithChildrenOf<TChildTable>+WithParentOf<TParentTable>                  |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7,TFieldsRelation8>+WithParentOf<TParentTable>                             |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7,TFieldsRelation8>+WithParentOf<TParentTable>+WithChildrenOf<TChildTable> |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7,TFieldsRelation8>+WithChildrenOf<TChildTable>                            |

| Namespace                               | Name   |
|---|--|
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6,TFieldsRelation7,TFieldsRelation8>+WithChildrenOf<TChildTable>+WithParentOf<TParentTable> |
| PX.Data.ReferentialIntegrity.Attributes | CompositeKey<TFieldsRelation1,TFieldsRelation2,TFieldsRelation3,TFieldsRelation4,TFieldsRelation5,TFieldsRelation6>+WithParentOf<TParentTable>   |
| PX.Data.SqlConstruct                    | SqlCommandsFactory   |
| PX.Data.SqlConstruct                    | SqlCommandsFactory+DatePartFunctionsEnum   |
| PX.Data.Maintenance.GI                  | GIScreenInfoListAttribute  |
| PX.Data.Maintenance.GI                  | GIScreenInfoListAttribute+ScreenType   |
| PX.Data.Maintenance.GI                  | GIScreenInfoListAttribute+ScreenMetadata   |
| PX.Data.Maintenance.GI                  | GIPrimaryViewFieldsListAttribute   |
| PX.Data.Maintenance.GI                  | GIPrimaryViewValueListAttribute  |
| PX.Data.Maintenance.GI                  | GIPrimaryViewValueListAttribute+GIListInternal   |
| PX.Data.Maintenance.GI                  | GINavigationParameter+screenID   |
| PX.Data.Maintenance.GI                  | GINavigationParameter+paramId  |
| PX.Data.Maintenance.GI                  | GIResult+navigateTo  |



| Namespace     | Name  |
|---------------|---|
| PX.Objects.WZ | WZTask+importScenraioID                       |
| PX.Objects.PM | PMChangeOrderLine+amountInBaseCury            |
| PX.Objects.PM | PMBudgetAccum+invoicedAmount                  |
| PX.Objects.PM | PMBudgetAccum+committedQty                    |
| PX.Objects.PM | PMBudgetAccum+committedAmount                 |
| PX.Objects.PM | PMBudgetAccum+committedOpenQty                |
| PX.Objects.PM | PMBudgetAccum+committedOpenAmount             |
| PX.Objects.PM | PMBudgetAccum+committedReceivedQty            |
| PX.Objects.PM | PMBudgetAccum+committedInvoicedQty            |
| PX.Objects.PM | PMBudgetAccum+committedInvoicedAmount         |
| PX.Objects.PM | PMRevenueBudget+rate                          |
| PX.Objects.PM | PMRevenueBudget+amount                        |
| PX.Objects.PM | PMRevenueBudget+revisedAmount                 |
| PX.Objects.PM | PMRevenueBudget+changeOrderAmount             |
| PX.Objects.PM | PMRevenueBudget+actualAmount                  |
| PX.Objects.PM | PMRevenueBudget+actualPlusOpenCommittedAmount |
| PX.Objects.PM | PMRevenueBudget+varianceAmount                |
| PX.Objects.PM | PMRevenueBudget+amountToInvoice               |
| PX.Objects.PM | PMRevenueBudget+prepaymentAmount              |

| Namespace     | Name                                       |
|---------------|--|
| PX.Objects.PM | PMRevenueBudget+prepaymentAvailable        |
| PX.Objects.PM | PMRevenueBudget+prepaymentInvoiced         |
| PX.Objects.PM | PMRevenueBudget+maxAmount                  |
| PX.Objects.PM | PMRevenueBudget+lastCostToComplete         |
| PX.Objects.PM | PMRevenueBudget+costToComplete             |
| PX.Objects.PM | PMRevenueBudget+lastCostAtCompletion       |
| PX.Objects.PM | PMRevenueBudget+costAtCompletion           |
| PX.Objects.PM | PMCostBudget+rate                          |
| PX.Objects.PM | PMCostBudget+amount                        |
| PX.Objects.PM | PMCostBudget+revisedAmount                 |
| PX.Objects.PM | PMCostBudget+actualAmount                  |
| PX.Objects.PM | PMCostBudget+changeOrderAmount             |
| PX.Objects.PM | PMCostBudget+actualPlusOpenCommittedAmount |
| PX.Objects.PM | PMCostBudget+varianceAmount                |
| PX.Objects.PM | PMOtherBudget+rate                         |
| PX.Objects.PM | PMOtherBudget+amount                       |
| PX.Objects.PM | PMOtherBudget+revisedAmount                |
| PX.Objects.PM | PMOtherBudget+actualAmount                 |
| PX.Objects.PM | PMOtherBudget+changeOrderAmount            |

| Namespace     | Name  |
|---------------|---|
| PX.Objects.PM | PMOtherBudget+actualPlusOpenCommittedAmount                       |
| PX.Objects.PM | PMOtherBudget+varianceAmount                                      |
| PX.Objects.SO | SOInvoice+curyPaymentTotal  |
| PX.Objects.SO | SOInvoice+paymentTotal  |
| PX.Objects.SO | SOInvoice+aRInvoiceDocType  |
| PX.Objects.SO | SOInvoice+aRInvoiceRefNbr   |
| PX.Objects.SO | SOPickPackShipUserSetup+promptChoice                              |
| PX.Objects.SO | SOPickPackShipUserSetup+autoSelectLotSerialNumberLocation         |
| PX.Objects.SO | SOPickPackShipUserSetup+promptLocation                            |
| PX.Objects.SO | SOPickPackShipUserSetup+carrierLabelPrintWithDeviceHub            |
| PX.Objects.SO | SOPickPackShipUserSetup+carrierLabelDefinePrinterManually         |
| PX.Objects.SO | SOPickPackShipUserSetup+carrierLabelPrinterName                   |
| PX.Objects.SO | SOPickPackShipUserSetup+shipmentConfirmationPrintWithDeviceHub    |
| PX.Objects.SO | SOPickPackShipUserSetup+shipmentConfirmationDefinePrinterManually |
| PX.Objects.SO | SOPickPackShipUserSetup+shipmentConfirmationPrinterName           |
| PX.Objects.SO | SOShipLine+discountsAppliedToLine                                 |
| PX.Objects.SO | SOLine+SOOrderFK  |
| PX.Objects.SO | SOLine+InventoryFK  |
| PX.Objects.SO | SOLine+discountsAppliedToLine                                     |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.SO | SOLineSplit+SOOrderFK                                  |
| PX.Objects.SO | SOLineSplit+SOLineFK                                   |
| PX.Objects.SO | SOLineSplit+InventoryFK                                |
| PX.Objects.SO | SOOrder+tranNbr  |
| PX.Objects.SO | SOPackageDetail+BoxFK                                  |
| PX.Objects.SO | ScanStatuses   |
| PX.Objects.SO | ScanModes  |
| PX.Objects.SO | ScanStates   |
| PX.Objects.SO | ScanCommands   |
| PX.Objects.SO | PickPackShip+ConfirmMode                               |
| PX.Objects.SO | PickPackShipCacheManager                               |
| PX.Objects.IN | INUpdateReplenishmentRules+InventoryItemRO+ItemClassFK |
| PX.Objects.IN | INUpdateReplenishmentRules+INTranSrc+tranType          |
| PX.Objects.IN | INPIClassItem+PIClassFK                                |
| PX.Objects.IN | INPIClassItem+InventoryFK                              |
| PX.Objects.IN | INPIClassLocation+PIClassFK                            |
| PX.Objects.IN | INPIClassLocation+LocationFK                           |
| PX.Objects.IN | INPIClassItemClass+PIClassFK                           |
| PX.Objects.IN | INPIClassItemClass+ItemClassFK                         |

| Namespace     | Name                                       |
|---------------|--|
| PX.Objects.IN | InventoryLotSerInq+INTranSplit+RegisterFK  |
| PX.Objects.IN | InventoryLotSerInq+INTranSplit+TranFK      |
| PX.Objects.IN | InventoryLotSerInq+INTranSplit+InventoryFK |
| PX.Objects.IN | InventoryLotSerInq+INTranSplit+SiteFK      |
| PX.Objects.IN | INItemStats+InventoryFK                    |
| PX.Objects.IN | INItemStats+SiteFK                         |
| PX.Objects.IN | INItemStats+ItemSiteFK                     |
| PX.Objects.IN | INItemStatsTotal+InventoryFK               |
| PX.Objects.IN | INItemStatsTotal+SiteFK                    |
| PX.Objects.IN | INLotSerClass+lotSerNumVal                 |
| PX.Objects.IN | INLotSerCostDetail+PK                      |
| PX.Objects.IN | INLotSerCostDetail+FK                      |
| PX.Objects.IN | INLotSerCostDetail+FK+InventoryItem        |
| PX.Objects.IN | INLotSerCostDetail+FK+SubItem              |
| PX.Objects.IN | INLotSerCostDetail+FK+Site                 |
| PX.Objects.IN | INLotSerCostDetail+FK+Location             |
| PX.Objects.IN | INLotSerCostDetail+FK+ItemLotSerial        |
| PX.Objects.IN | INSite+lockSitePICountEntry                |
| PX.Objects.IN | PIGenerator+BqlCommandWithParameters       |

| Namespace                                     | Name  |
|---|---|
| PX.Objects.IN                                 | InventoryItem+lotSerNumSharedVal  |
| PX.Objects.IN                                 | InventoryItem+lotSerNumShared   |
| PX.Objects.IN                                 | InventoryItem+lotSerNumVal  |
| PX.Objects.IN.Repositories                    | InventoryItemRepository   |
| PX.Objects.IN.Overrides<br>.INDocumentRelease | INTranCostUpdate+tranType   |
| PX.Objects.IN.Overrides<br>.INDocumentRelease | INTranSplitUpdate+tranType  |
| PX.Objects.IN.Overrides<br>.INDocumentRelease | POReceiptLineCost+AccumulatorAttribute  |
| PX.Objects.IN.Overrides<br>.INDocumentRelease | POReceiptLineUpdate+Rule  |
| PX.Objects.FA                                 | SelectDepreciationMethod<DeprDate,ClassID,BookID>   |
| PX.Objects.FA                                 | FAOpenPeriodAttribute   |
| PX.Objects.FA                                 | OffsetBookDate<BookDate,BookID,DepreciationMethodID,AveragingConvention,UsefulLife>         |
| PX.Objects.FA                                 | OffsetBookDateToPeriod<BookDate,BookID,DepreciationMethodID,AveragingConvention,UsefulLife> |
| PX.Objects.FA                                 | BoundaryYears+yearTo  |
| PX.Objects.FA                                 | FABook+firstCalendarYear  |
| PX.Objects.FA                                 | FABook+lastCalendarYear   |
| PX.Objects.EP                                 | EPCompanyTreeOwner+wseCalendarTime  |

| Namespace                     | Name  |
|-------------------------------|---|
| PX.Objects.CT                 | Contract+asset  |
| PX.Objects.CT                 | Contract+liability  |
| PX.Objects.CT                 | Contract+income   |
| PX.Objects.CT                 | Contract+expense  |
| PX.Objects.GL                 | FinPeriodIDFormattingAttribute+ValidationResult               |
| PX.Objects.GL                 | FinPeriodIDFormattingAttribute+PeriodResult                   |
| PX.Objects.GL                 | TranPeriodIDFormattingAttribute                               |
| PX.Objects.GL                 | FinPeriodIDAttribute+FinPeriodComparison                      |
| PX.Objects.GL                 | TranPeriodIDAttribute   |
| PX.Objects.GL                 | GLHistoryEnquiryResult+consolAccountID                        |
| PX.Objects.GL                 | AccountByPeriod+creditTotal                                   |
| PX.Objects.GL                 | AccountByPeriod+debitTotal                                    |
| PX.Objects.GL                 | FiscalYearCreator<TYear,TPeriod,TPeriodSetup>                 |
| PX.Objects.GL                 | FiscalPeriodCreator<TYear,TPeriod,TPeriodSetup>               |
| PX.Objects.GL.ClassExtensions | BqlExtensions   |
| PX.Objects.GL.Descriptor      | CalendarOrganizationIDProvider+SourcesSpecificationCollection |
| PX.Objects.GL.Descriptor      | CalendarOrganizationIDProvider+SourceSpecificationItem        |

| Namespace                               | Name   |
|---|--|
| PX.Objects.GL.Descriptor                | CalendarOrganizationIDProvider+SourceValuesCollectionItem  |
| PX.Objects.GL.Descriptor                | CalendarOrganizationIDProvider+SourceValuesCollection  |
| PX.Objects.GL.Descriptor                | CalendarOrganizationIDProvider+SourceSpecification<TBranchSource,TIsMain>                                    |
| PX.Objects.GL.Descriptor                | CalendarOrganizationIDProvider+SourceSpecification<TBranchSource,TBranchFormula,TIsMain>                     |
| PX.Objects.GL.Descriptor                | CalendarOrganizationIDProvider+SourceSpecification<TBranchSource,TBranchFormula,TOrganizationSource,TIsMain> |
| PX.Objects.GL.Overrides.ScheduleProcess | GLTranNew+tranPeriodID   |
| PX.Objects.GL.Reclassification.UI       | ReclassifyTransactionsProcess+LoadOptions+maxDocs  |
| PX.Objects.CR                           | CRSetup+showAuthorForCaseEmail   |
| PX.Objects.Common                       | ProcessingResultBase<TMessage>   |
| PX.Objects.CA                           | ProcessingCenterTypeNameConstants  |
| PX.Objects.CA                           | CATransfer+outPeriodID   |
| PX.Objects.AR                           | RetainageOptions+finPeriodID   |
| PX.Objects.AR                           | ARPaymentInfo+processingCenterID   |
| PX.Objects.AR                           | ARDocumentEnq+ARDocumentFilter+byFinancialPeriod   |
| PX.Objects.AR                           | ARCustomerBalanceEnq+ARHistoryFilter+byFinancialPeriod   |



| Namespace                         | Name  |
|-----------------------------------|---|
| PX.Objects.AR                     | ARPaymentEntry+PaymentState   |
| PX.Objects.AR                     | CustomerPaymentMethod+isBillContSameAsMain  |
| PX.Objects.AR                     | ARPaymentChargeSelect<PaymentTable,PaymentMethodID,CashAccountID,AdjDate,AdjFinPeriodID,PMInstancelD,<br>WhereSelect> |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry+ReleaseDelegate  |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry+UpdateDocStateDelegate   |
| PX.Objects.PO                     | POReceiptLine+SiteStatusFK  |
| PX.Objects.PO                     | POReceiptLine+LocationStatusFK  |
| PX.Objects.PO                     | POReceiptLine+LotSerialStatusFK   |
| PX.Objects.PO                     | POReceiptEntry+POOrderS+receipt   |
| PX.Objects.PO                     | POLine+shiptToBAccountID  |
| PX.Objects.PO                     | POLine+shiptToLocationID  |
| PX.Objects.PO                     | POOrder+receipt   |
| PX.Objects.PO                     | POOrderEntry+POOrderS+receipt   |
| PX.Objects.AP                     | APDocumentEnq+APDocumentFilter+byFinancialPeriod  |
| PX.Objects.AP                     | RetainageOptions+finPeriodID  |
| PX.Objects.AP                     | APRegister+hidden   |

| Namespace                | Name  |
|--------------------------|---|
| PX.Objects.AP            | APPaymentChargeSelect<PaymentTable,PaymentMethodID,CashAccountID,AdjDate,AdjFinPeriodID,WhereSelect>  |
| PX.Objects.AP            | PaymentChargeSelect<PaymentTable,PaymentMethodID,CashAccountID,AdjDate,AdjFinPeriodID,ChargeTable,EntryTypeID,ChargeDocType,ChargeRefNbr,WhereSelect> |
| PX.Objects.AP.Standalone | APRegisterAlias2+hidden   |
| PX.Objects.AP.Standalone | APRegisterAlias+hidden  |
| PX.Objects.FS            | AppointmentEntryBase+MultiCurrency  |
| PX.Objects.FS            | AppointmentEntryBase+SalesTax   |
| PX.Objects.FS            | AppointmentEntryBase+ServiceRegistration  |
| PX.Objects.FS            | ContractScheduleAutoNumberAttribute   |
| PX.Objects.FS            | RouteContractScheduleAutoNumberAttribute  |
| PX.Objects.FS            | FSSelectorServiceContractAttribute  |
| PX.Objects.FS            | FSSelectorSalesOrderSrvOrdType  |
| PX.Objects.FS            | InvoicingFunctions+AddressSource  |
| PX.Objects.FS            | SharedClasses+SOLineEquipmentComponent  |
| PX.Objects.FS            | ServiceOrderFilter+noPosted   |
| PX.Objects.FS            | FSBranchLocation+addressLine1   |
| PX.Objects.FS            | FSBranchLocation+addressLine2   |

| Namespace     | Name                              |
|---------------|-----------------------------------|
| PX.Objects.FS | FSBranchLocation+addressLine3     |
| PX.Objects.FS | FSBranchLocation+city             |
| PX.Objects.FS | FSBranchLocation+countryID        |
| PX.Objects.FS | FSBranchLocation+eMail            |
| PX.Objects.FS | FSBranchLocation+fax              |
| PX.Objects.FS | FSBranchLocation+isValidated      |
| PX.Objects.FS | FSBranchLocation+phone1           |
| PX.Objects.FS | FSBranchLocation+phone2           |
| PX.Objects.FS | FSBranchLocation+phone3           |
| PX.Objects.FS | FSBranchLocation+postalCode       |
| PX.Objects.FS | FSBranchLocation+salutation       |
| PX.Objects.FS | FSBranchLocation+state            |
| PX.Objects.FS | FSBranchLocation+webSite          |
| PX.Objects.FS | FSEquipment+mem_UnassignedVehicle |
| PX.Objects.FS | FSEquipment+mem_Description       |
| PX.Objects.FS | FSEquipment+mem_ReplacedEquipment |
| PX.Objects.FS | FSManufacturer+addressLine1       |
| PX.Objects.FS | FSManufacturer+addressLine2       |
| PX.Objects.FS | FSManufacturer+addressLine3       |

| Namespace     | Name                                 |
|---------------|--------------------------------------|
| PX.Objects.FS | FSManufacturer+city                  |
| PX.Objects.FS | FSManufacturer+countryID             |
| PX.Objects.FS | FSManufacturer+eMail                 |
| PX.Objects.FS | FSManufacturer+fax                   |
| PX.Objects.FS | FSManufacturer+isValidated           |
| PX.Objects.FS | FSManufacturer+phone1                |
| PX.Objects.FS | FSManufacturer+phone2                |
| PX.Objects.FS | FSManufacturer+phone3                |
| PX.Objects.FS | FSManufacturer+postalCode            |
| PX.Objects.FS | FSManufacturer+salutation            |
| PX.Objects.FS | FSManufacturer+state                 |
| PX.Objects.FS | FSManufacturer+webSite               |
| PX.Objects.FS | FSRouteDocument+mem_ActualDuration   |
| PX.Objects.FS | FSRouteDocument+mem_BusinessDateTime |
| PX.Objects.FS | FSServiceOrder+addressLine1          |
| PX.Objects.FS | FSServiceOrder+addressLine2          |
| PX.Objects.FS | FSServiceOrder+addressLine3          |
| PX.Objects.FS | FSServiceOrder+addressValidated      |
| PX.Objects.FS | FSServiceOrder+city                  |

| Namespace     | Name   |
|---------------|--|
| PX.Objects.FS | FSServiceOrder+countryID                             |
| PX.Objects.FS | FSServiceOrder+eMail                                 |
| PX.Objects.FS | FSServiceOrder+fax                                   |
| PX.Objects.FS | FSServiceOrder+phone1                                |
| PX.Objects.FS | FSServiceOrder+phone2                                |
| PX.Objects.FS | FSServiceOrder+phone3                                |
| PX.Objects.FS | FSServiceOrder+postalCode                            |
| PX.Objects.FS | FSServiceOrder+state                                 |
| PX.Objects.FS | FSServiceOrder+attention                             |
| PX.Objects.FS | FSSrvOrdType+appWithMultEmp                          |
| PX.Objects.FS | FSSrvOrdType+appWithoutEmp                           |
| PX.Objects.FS | FSSrvOrdType+appWithoutSrv                           |
| PX.Objects.FS | FSSrvOrdType+singleAppointment                       |
| PX.Objects.FS | FSSrvOrdType+singleService                           |
| PX.Objects.FS | FSxService+autoShowNote                              |
| PX.Objects.FS | FSAppointmentScheduleBoard+serviceOrderPhone         |
| PX.Objects.FS | FSAppointmentScheduleBoard+serviceOrderEmail         |
| PX.Objects.FS | POEnabledFSSODet+srvBranchLocationIDbranchLocationID |

DRAFT

## Other Breaking Methods

| Namespace | Simple Name                 | Name   |
|-----------|-----------------------------|--|
| PX.Common | EnumerableExtensions        | Append<T>(IEnumerable<T>,T)                  |
| PX.Common | EnumerableExtensions        | Prepend<T>(IEnumerable<T>,T)                 |
| PX.SM     | PerformanceMonitorMa<br>int | actionGC()                                   |
| PX.SM     | PerformanceMonitorMa<br>int | actionStackTrace()                           |
| PX.SM     | SMPerformanceFilterRo<br>w  | get_GCTotalMemory()                          |
| PX.SM     | SMPerformanceFilterRo<br>w  | get_GCCollection()                           |
| PX.SM     | SMPerformanceFilterRo<br>w  | get_WorkingSet()                             |
| PX.SM     | SMPerformanceFilterRo<br>w  | get_PrivateMemory()                          |
| PX.SM     | AUReportProcess             | RenderReport(ReportNode,String,Hashtable)    |
| PX.SM     | Users                       | GetFullName(String,String)                   |
| PX.SM     | SynchronizationProcess      | EnshureExchange(String,String,String)        |
| PX.Data   | PXSelect                    | SelectWindowed(PXGraph,Int32,Int32,Object[]) |
| PX.Data   | PXSelect                    | Select(PXGraph,Object[])                     |
| PX.Data   | PXSelect                    | SelectSingleBound(PXGraph,Object[],Object[]) |
| PX.Data   | PXSelect                    | SelectMultiBound(PXGraph,Object[],Object[])  |

| Namespace | Simple Name | Name   |
|-----------|-------------|--|
| PX.Data   | PXSelect    | Select<Resultset>(PXGraph,Object[])  |
| PX.Data   | PXSelect    | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelect    | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelect    | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])   |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5>(PXGraph,Object,Object,Object,Object, Object, Object, Object[])   |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])                                 |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7>(PXGraph,Object,Object, Object, Object,Object, Object,Object,Object[])                            |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object, Object, Object, Object, Object,Object,Object,Object,Object[])             |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph, Object, Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |
| PX.Data   | PXSelect    | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelect    | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelect    | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |
| PX.Data   | PXSelect    | Clear(PXGraph)   |



| Namespace | Simple Name      | Name   |
|-----------|------------------|--|
| PX.Data   | PXSelect         | StoreCached(PXGraph,PXCommandKey,List<Object>)                                     |
| PX.Data   | PXSelect         | GetCommand()   |
| PX.Data   | Branch           | .ctor(Int32,String,PXAccess+MasterCollection+ Organization,Boolean)                |
| PX.Data   | PXModelExtension | PersistUpdated(Object)   |
| PX.Data   | PXModelExtension | PersistInserted(Object)  |
| PX.Data   | PXModelExtension | PersistDeleted(Object)   |
| PX.Data   | PXCache          | PersistUpdated(Object)   |
| PX.Data   | PXCache          | PersistInserted(Object)  |
| PX.Data   | PXCache          | PersistDeleted(Object)   |
| PX.Data   | PXSelectReadOnly | SelectWindowed(PXGraph,Int32,Int32,Object[])                                       |
| PX.Data   | PXSelectReadOnly | Select(PXGraph,Object[])   |
| PX.Data   | PXSelectReadOnly | SelectSingleBound(PXGraph,Object[],Object[])                                       |
| PX.Data   | PXSelectReadOnly | SelectMultiBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly | Select<Resultset>(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])                            |
| PX.Data   | PXSelectReadOnly | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1>(PXGraph,Object,Object,Object[])                              |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[]) |

| Namespace | Simple Name      | Name  |
|-----------|------------------|---|
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5>(PXGraph,Object,Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                             |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])               |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |
| PX.Data   | PXSelectReadOnly | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly | Clear(PXGraph)  |
| PX.Data   | PXSelectReadOnly | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectReadOnly | GetCommand()  |
| PX.Data   | PXSelectReadOnly | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly | SelectMultiBound(PXGraph,Object[],Object[])   |

| Namespace | Simple Name      | Name   |
|-----------|------------------|--|
| PX.Data   | PXSelectReadOnly | Select<Resultset>(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])  |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph, Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5>(PXGraph,Object,Object,Object,Object, Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6>(PXGraph,Object,Object,Object, Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7>(PXGraph,Object,Object, Object,Object,Object,Object,Object,Object,Object[])                                     |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object, Object,Object,Object,Object,Object,Object,Object,Object,Object[])                       |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph, Object,Object,Object, Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |
| PX.Data   | PXSelectReadOnly | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |

| Namespace | Simple Name                 | Name  |
|-----------|-----------------------------|---|
| PX.Data   | PXSelectReadOnly            | Clear(PXGraph)                                      |
| PX.Data   | PXSelectReadOnly            | StoreCached(PXGraph,PXCommandKey,List<Object>)      |
| PX.Data   | PXSelectReadOnly            | GetCommand()  |
| PX.Data   | PXDBBinaryStringAttribute   | RowSelecting(PXCache,PXRowSelectingEventArgs)       |
| PX.Data   | PXNoteAttribute             | UpdateNoteRecord(PXCache,Guid,String)               |
| PX.Data   | PXSequentialNoteAttribute   | get_ NoteField()                                    |
| PX.Data   | PXSequentialNoteAttribute   | set_ NoteField(Type)                                |
| PX.Data   | PXSequentialNoteAttribute   | FieldDefaulting(PXCache,PXFieldDefaultingEventArgs) |
| PX.Data   | DataScreenBase              | .ctor(String)                                       |
| PX.Data   | GetEditPreventingReasonArgs | .ctor(PXCache,Object,Object)                        |
| PX.Data   | PXDatabaseProviderBase      | tryGetSelectableCompanies(Int32,String&)            |
| PX.Data   | PXDatabaseProviderBase      | getCompanyID(String,companySetting&)                |
| PX.Data   | PXDatabaseProviderBase      | getColumnNameForAudit(String)                       |
| PX.Data   | PXDatabaseProvider          | getCompanyID(String,companySetting&)                |
| PX.Data   | BqlGenericCommand           | AppendORDER(StringBuilder,ISqlDialect)              |

| Namespace | Simple Name        | Name  |
|-----------|--------------------|---|
| PX.Data   | BqlGenericCommand  | AppendGROUPBY(StringBuilder,ISqlDialect)  |
| PX.Data   | PXDataFieldMapping | .ctor(String,String,String)   |
| PX.Data   | PXSelect           | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelect           | Select(PXGraph,Object[])  |
| PX.Data   | PXSelect           | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelect           | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelect           | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelect           | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelect           | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelect           | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelect           | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelect           | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelect           | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelect           | Search<Field0,Field1,Field2,Field3,Field4,Field5>(PXGraph,Object,Object,Object,Object, Object,Object, Object[])                               |
| PX.Data   | PXSelect           | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6>(PXGraph,Object,Object, Object,Object,Object,Object, Object,Object[])                 |
| PX.Data   | PXSelect           | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7>(PXGraph,Object,Object, Object,Object,Object, Object,Object, Object, Object[]) |

| Namespace | Simple Name | Name  |
|-----------|-------------|---|
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object, Object,Object,Object,Object,Object,Object,Object, Object[])                        |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph, Object,Object,Object,Object,Object,Object,Object,Object, Object, Object, Object[]) |
| PX.Data   | PXSelect    | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelect    | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelect    | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelect    | Clear(PXGraph)  |
| PX.Data   | PXSelect    | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelect    | GetCommand()  |
| PX.Data   | PXSelect    | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelect    | Select(PXGraph,Object[])  |
| PX.Data   | PXSelect    | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelect    | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelect    | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelect    | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelect    | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelect    | Search<Field0,Field1>(PXGraph,Object,Object, Object[])  |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object, Object, Object[])   |
| PX.Data   | PXSelect    | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object, Object, Object, Object, Object[])   |

| Namespace | Simple Name  | Name   |
|-----------|--------------|--|
| PX.Data   | PXSelect     | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelect     | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelect     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])   |
| PX.Data   | PXSelect     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                     |
| PX.Data   | PXSelect     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object,<br>Object,Object,Object,Object,Object,Object,Object,Object, Object[])               |
| PX.Data   | PXSelect     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelect     | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelect     | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelect     | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |
| PX.Data   | PXSelect     | Clear(PXGraph)   |
| PX.Data   | PXSelect     | StoreCached(PXGraph,PXCommandKey,List<Object>)   |
| PX.Data   | PXSelect     | GetCommand()   |
| PX.Data   | PXSelectJoin | SelectWindowed(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoin | Select(PXGraph,Object[])   |
| PX.Data   | PXSelectJoin | SelectSingleBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoin | SelectMultiBound(PXGraph,Object[],Object[])  |

| Namespace | Simple Name  | Name  |
|-----------|--------------|---|
| PX.Data   | PXSelectJoin | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectJoin | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5>(PXGraph,Object,Object,Object, Object,Object,Object, Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7>(PXGraph,Object,Object,Object,Object,Object, Ob<br>ject,Object,Object,Object[])                              |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object,<br>Object,Object,Object,Object,Object,Object,Object,Object, Object[])                |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object, Object[]) |
| PX.Data   | PXSelectJoin | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoin | Clear(PXGraph)  |



| Namespace | Simple Name  | Name  |
|-----------|--------------|---|
| PX.Data   | PXSelectJoin | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoin | GetCommand()  |
| PX.Data   | PXSelectJoin | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoin | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectJoin | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoin | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectJoin | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object[])                                   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object,Object[])                     |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object,Object[])       |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8>(PXGraph,Object,Object,<br>Object,Object,Object,Object,Object,Object,Object,Object[]) |

| Namespace | Simple Name  | Name  |
|-----------|--------------|---|
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph,Object, Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectJoin | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoin | Clear(PXGraph)  |
| PX.Data   | PXSelectJoin | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoin | GetCommand()  |
| PX.Data   | PXSelectJoin | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoin | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectJoin | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoin | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectJoin | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoin | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |

| Namespace | Simple Name     | Name  |
|-----------|-----------------|---|
| PX.Data   | PXSelectJoin    | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectJoin    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoin    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                                     |
| PX.Data   | PXSelectJoin    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                |
| PX.Data   | PXSelectJoin    | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object,Object,Object, Object, Object[]) |
| PX.Data   | PXSelectJoin    | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin    | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoin    | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoin    | Clear(PXGraph)  |
| PX.Data   | PXSelectJoin    | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoin    | GetCommand()  |
| PX.Data   | PXSelectOrderBy | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectOrderBy | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectOrderBy | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectOrderBy | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectOrderBy | Select<Resultset>(PXGraph,Object[])   |

| Namespace | Simple Name     | Name   |
|-----------|-----------------|--|
| PX.Data   | PXSelectOrderBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                             |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectOrderBy | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectOrderBy | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectOrderBy | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |
| PX.Data   | PXSelectOrderBy | Clear(PXGraph)   |
| PX.Data   | PXSelectOrderBy | StoreCached(PXGraph,PXCommandKey,List<Object>)   |

| Namespace | Simple Name     | Name  |
|-----------|-----------------|---|
| PX.Data   | PXSelectOrderBy | GetCommand()  |
| PX.Data   | PXSelectOrderBy | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectOrderBy | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectOrderBy | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectOrderBy | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectOrderBy | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectOrderBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph, Object,Object,Object,Object,Object,Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])                            |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object,Object[])       |
| PX.Data   | PXSelectOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |

| Namespace | Simple Name      | Name  |
|-----------|------------------|---|
| PX.Data   | PXSelectOrderBy  | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectOrderBy  | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectOrderBy  | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectOrderBy  | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectOrderBy  | Clear(PXGraph)  |
| PX.Data   | PXSelectOrderBy  | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectOrderBy  | GetCommand()  |
| PX.Data   | PXSelectReadOnly | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectReadOnly | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3>(PXGraph,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object,Object[])   |

| Namespace | Simple Name       | Name   |
|-----------|-------------------|--|
| PX.Data   | PXSelectReadOnly  | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectReadOnly  | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])                                     |
| PX.Data   | PXSelectReadOnly  | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                      |
| PX.Data   | PXSelectReadOnly  | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object, Object, Object[])        |
| PX.Data   | PXSelectReadOnly  | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object, Object, Object[]) |
| PX.Data   | PXSelectReadOnly  | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly  | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly  | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly  | Clear(PXGraph)   |
| PX.Data   | PXSelectReadOnly  | StoreCached(PXGraph,PXCommandKey,List<Object>)   |
| PX.Data   | PXSelectReadOnly  | GetCommand()   |
| PX.Data   | PXSelectReadOnly2 | SelectWindowed(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Select(PXGraph,Object[])   |
| PX.Data   | PXSelectReadOnly2 | SelectSingleBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly2 | SelectMultiBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | Select<Resultset>(PXGraph,Object[])  |

| Namespace | Simple Name       | Name  |
|-----------|-------------------|---|
| PX.Data   | PXSelectReadOnly2 | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,<br>Field7>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                            |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])               |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |
| PX.Data   | PXSelectReadOnly2 | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Clear(PXGraph)  |
| PX.Data   | PXSelectReadOnly2 | StoreCached(PXGraph,PXCommandKey,List<Object>)  |



| Namespace | Simple Name       | Name   |
|-----------|-------------------|--|
| PX.Data   | PXSelectReadOnly2 | GetCommand()   |
| PX.Data   | PXSelectReadOnly2 | SelectWindowed(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Select(PXGraph,Object[])   |
| PX.Data   | PXSelectReadOnly2 | SelectSingleBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly2 | SelectMultiBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | Select<Resultset>(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly2 | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph, Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])                                   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object,Object[])              |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |

| Namespace | Simple Name       | Name  |
|-----------|-------------------|---|
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectReadOnly2 | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Clear(PXGraph)  |
| PX.Data   | PXSelectReadOnly2 | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectReadOnly2 | GetCommand()  |
| PX.Data   | PXSelectReadOnly2 | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly2 | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly2 | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectReadOnly2 | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph, Object,Object,Object,Object,Object,Object, Object[])  |

| Namespace | Simple Name       | Name  |
|-----------|-------------------|---|
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                             |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object, Object, Object[])               |
| PX.Data   | PXSelectReadOnly2 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object, Object[]) |
| PX.Data   | PXSelectReadOnly2 | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly2 | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly2 | Clear(PXGraph)  |
| PX.Data   | PXSelectReadOnly2 | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectReadOnly2 | GetCommand()  |
| PX.Data   | PXSelectReadOnly3 | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly3 | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly3 | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly3 | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly3 | Select<Resultset>(PXGraph,Object[])   |

| Namespace | Simple Name       | Name   |
|-----------|-------------------|--|
| PX.Data   | PXSelectReadOnly3 | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly3 | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph, Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                      |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectReadOnly3 | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly3 | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly3 | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Clear(PXGraph)   |
| PX.Data   | PXSelectReadOnly3 | StoreCached(PXGraph,PXCommandKey,List<Object>)   |

| Namespace | Simple Name       | Name  |
|-----------|-------------------|---|
| PX.Data   | PXSelectReadOnly3 | GetCommand()  |
| PX.Data   | PXSelectReadOnly3 | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly3 | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectReadOnly3 | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly3 | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectReadOnly3 | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectReadOnly3 | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object, Object, Object, Object, Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object, Object[])  |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object, Object, Object[])                               |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object, Object, Object, Object[])                |
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object, Object, Object, Object, Object[]) |

| Namespace | Simple Name       | Name  |
|-----------|-------------------|---|
| PX.Data   | PXSelectReadOnly3 | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectReadOnly3 | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly3 | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectReadOnly3 | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectReadOnly3 | Clear(PXGraph)  |
| PX.Data   | PXSelectReadOnly3 | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectReadOnly3 | GetCommand()  |
| PX.Data   | PXSelectGroupBy   | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupBy   | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectGroupBy   | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy   | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectGroupBy   | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectGroupBy   | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectGroupBy   | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectGroupBy   | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectGroupBy   | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectGroupBy   | Search<Field0,Field1,Field2,Field3>(PXGraph,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectGroupBy   | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object,Object[])   |

| Namespace | Simple Name     | Name  |
|-----------|-----------------|---|
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                                     |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object,Object,Object, Object[])                |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object,Object,Object, Object, Object[]) |
| PX.Data   | PXSelectGroupBy | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupBy | Clear(PXGraph)  |
| PX.Data   | PXSelectGroupBy | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectGroupBy | GetCommand()  |
| PX.Data   | PXSelectGroupBy | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupBy | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectGroupBy | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectGroupBy | Select<Resultset>(PXGraph,Object[])   |

| Namespace | Simple Name     | Name   |
|-----------|-----------------|--|
| PX.Data   | PXSelectGroupBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupBy | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])  |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3>(PXGraph,Object,Object,Object,Object,Object[])  |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object ,Object[])   |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                      |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectGroupBy | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectGroupBy | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectGroupBy | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])   |
| PX.Data   | PXSelectGroupBy | Clear(PXGraph)   |
| PX.Data   | PXSelectGroupBy | StoreCached(PXGraph,PXCommandKey,List<Object>)   |



| Namespace | Simple Name         | Name  |
|-----------|---------------------|---|
| PX.Data   | PXSelectGroupBy     | GetCommand()  |
| PX.Data   | PXSelectJoinGroupBy | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])                            |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object,Object[])       |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |

| Namespace | Simple Name         | Name  |
|-----------|---------------------|---|
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectJoinGroupBy | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Clear(PXGraph)  |
| PX.Data   | PXSelectJoinGroupBy | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoinGroupBy | GetCommand()  |
| PX.Data   | PXSelectJoinGroupBy | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |

| Namespace | Simple Name                     | Name  |
|-----------|---------------------------------|---|
| PX.Data   | PXSelectJoinGroupBy             | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy             | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy             | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                            |
| PX.Data   | PXSelectJoinGroupBy             | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])               |
| PX.Data   | PXSelectJoinGroupBy             | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |
| PX.Data   | PXSelectJoinGroupBy             | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy             | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy             | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinGroupBy             | Clear(PXGraph)  |
| PX.Data   | PXSelectJoinGroupBy             | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoinGroupBy             | GetCommand()  |
| PX.Data   | PXCommandPreparing<br>EventArgs | get_FieldName()   |
| PX.Data   | PXCommandPreparing<br>EventArgs | set_FieldName(String)   |
| PX.Data   | PXSelectJoinOrderBy             | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinOrderBy             | Select(PXGraph,Object[])  |

| Namespace | Simple Name         | Name   |
|-----------|---------------------|--|
| PX.Data   | PXSelectJoinOrderBy | SelectSingleBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoinOrderBy | SelectMultiBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinOrderBy | Select<Resultset>(PXGraph,Object[])  |
| PX.Data   | PXSelectJoinOrderBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2>(PXGraph,Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])   |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])                                   |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object,Object[])                     |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object[])               |
| PX.Data   | PXSelectJoinOrderBy | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[]) |
| PX.Data   | PXSelectJoinOrderBy | SearchAll<Sort>(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoinOrderBy | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])   |

| Namespace | Simple Name         | Name  |
|-----------|---------------------|---|
| PX.Data   | PXSelectJoinOrderBy | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinOrderBy | Clear(PXGraph)  |
| PX.Data   | PXSelectJoinOrderBy | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoinOrderBy | GetCommand()  |
| PX.Data   | PXSelectGroupBy     | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupBy     | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectGroupBy     | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy     | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectGroupBy     | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectGroupBy     | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectGroupBy     | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])                      |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object, Object,Object[]) |

| Namespace | Simple Name         | Name  |
|-----------|---------------------|---|
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                                    |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectGroupBy     | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectGroupBy     | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy     | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupBy     | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupBy     | Clear(PXGraph)  |
| PX.Data   | PXSelectGroupBy     | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectGroupBy     | GetCommand()  |
| PX.Data   | PXSelectJoinGroupBy | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy | SelectMultiBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectJoinGroupBy | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |

| Namespace | Simple Name                | Name  |
|-----------|----------------------------|---|
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,<br>Field7>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                                    |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectJoinGroupBy        | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectJoinGroupBy        | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectJoinGroupBy        | Clear(PXGraph)  |
| PX.Data   | PXSelectJoinGroupBy        | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectJoinGroupBy        | GetCommand()  |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectWindowed(PXGraph,Int32,Int32,Object[])  |

| Namespace | Simple Name                | Name   |
|-----------|----------------------------|--|
| PX.Data   | PXSelectGroupByOrder<br>By | Select(PXGraph,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectSingleBound(PXGraph,Object[],Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectMultiBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Select<Resultset>(PXGraph,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0>(PXGraph,Object,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1>(PXGraph,Object,Object,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object, Object,Object[])                                 |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])               |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[]) |



| Namespace | Simple Name                | Name  |
|-----------|----------------------------|---|
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object,Object,Object,Object[])                                    |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object[])                |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object,Object, Object[]) |
| PX.Data   | PXSelectGroupByOrder<br>By | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Clear(PXGraph)  |
| PX.Data   | PXSelectGroupByOrder<br>By | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data   | PXSelectGroupByOrder<br>By | GetCommand()  |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectWindowed(PXGraph,Int32,Int32,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Select(PXGraph,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectSingleBound(PXGraph,Object[],Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectMultiBound(PXGraph,Object[],Object[])   |

| Namespace | Simple Name                | Name  |
|-----------|----------------------------|---|
| PX.Data   | PXSelectGroupByOrder<br>By | Select<Resultset>(PXGraph,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | SelectWindowed<Resultset>(PXGraph,Int32,Int32,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0>(PXGraph,Object,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1>(PXGraph,Object,Object,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2>(PXGraph,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3>(PXGraph,Object, Object,Object,Object,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4>(PXGraph,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6><br>(PXGraph,Object,Object,Object,Object,Object,Object, Object,Object[])  |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7><br>(PXGraph,Object,Object,Object,Object,Object, Object, Object,Object,Object[])   |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8><br>(PXGraph,Object,Object,Object,Object,Object, Object, Object, Object, Object, Object[])                        |
| PX.Data   | PXSelectGroupByOrder<br>By | Search<Field0,Field1,Field2,Field3,Field4,Field5,Field6,Field7,Field8,Field9><br>(PXGraph,Object,Object,Object,Object,Object, Object, Object, Object, Object, Object, Object, Object[]) |

| Namespace                  | Simple Name                | Name  |
|----------------------------|----------------------------|---|
| PX.Data                    | PXSelectGroupByOrder<br>By | SearchAll<Sort>(PXGraph,Object[],Object[])  |
| PX.Data                    | PXSelectGroupByOrder<br>By | SearchAll<Resultset,Sort>(PXGraph,Object[],Object[])  |
| PX.Data                    | PXSelectGroupByOrder<br>By | SearchWindowed<Resultset,Sort>(PXGraph,Object[], Int32,Int32,Object[])  |
| PX.Data                    | PXSelectGroupByOrder<br>By | Clear(PXGraph)  |
| PX.Data                    | PXSelectGroupByOrder<br>By | StoreCached(PXGraph,PXCommandKey,List<Object>)  |
| PX.Data                    | PXSelectGroupByOrder<br>By | GetCommand()  |
| PX.Data                    | CommandPreparing           | get_FieldName()   |
| PX.Data                    | CommandPreparing           | set_FieldName(String)   |
| PX.Data                    | PXLineNbrAttribute         | get_IncrementStep()   |
| PX.Data                    | PXLineNbrAttribute         | set_IncrementStep(Int16)  |
| PX.Data                    | PXLicenseDefinition        | .ctor(Boolean,String,DateTime,DateTime,DateTime,<br>DateTime,DateTime,DateTime,String,String,String,String,<br>Int32,Int32,Int32,String,String,ReadOnlyCollection<String>,<br>String,Int32,Int32,Int32,Int32,Int32,Int32,Int32,Int32,Int32,<br>Int32,Int32,Int32,DateTime,DateTime,Int32,Int32,Int32, Int32,Int32,DateTime,Int32) |
| PX.Data                    | IPXLicensePolicy           | HasViolations(PXLicense)  |
| PX.Data.Wiki.ExternalFiles | BaseFileExchange           | .ctor(String,String)  |

| Namespace                  | Simple Name             | Name  |
|----------------------------|-------------------------|---|
| PX.Data.Wiki.ExternalFiles | FileExchangeHelper      | GetExchanger(String,String,String)                    |
| PX.Data.Wiki.ExternalFiles | FTPFileExchange         | .ctor(String,String)                                  |
| PX.Data.Wiki.ExternalFiles | ShareFileExchange       | .ctor(String,String)                                  |
| PX.Data.Wiki.ExternalFiles | HttpFileExchange        | .ctor(String,String)                                  |
| PX.Data.Maintenance.GI     | GenericInquiryDesigner  | moveUpResults()                                       |
| PX.Data.Maintenance.GI     | GenericInquiryDesigner  | moveDownResults()                                     |
| PX.Data.Database.Common    | PXDatabaseDummyProvider | getCompanyID(String,companySetting&)                  |
| PX.Api.Mobile.Controllers  | LoginController         | Locales()   |
| PX.Objects.PM              | POLinePM                | get_CuryOpenAmt()                                     |
| PX.Objects.PM              | POLinePM                | set_CuryOpenAmt(Nullable<Decimal>)                    |
| PX.Objects.PM              | PMTaxAttribute          | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal) |
| PX.Objects.PM              | ProformaEntry           | RecalcAvalara(PXAdapter)                              |
| PX.Objects.PM              | ProformaEntry           | _(Events+RowUpdated<PMProforma>)                      |
| PX.Objects.PM              | ProformaEntry           | _(Events+RowUpdated<PMProformaProgressLine>)          |
| PX.Objects.PM              | ProformaEntry           | Persist()   |
| PX.Objects.PM              | ProformaEntry           | InvalidateTax(PMProformaLine,PMProformaLine)          |
| PX.Objects.PM              | ProformaEntry           | RecalculateAvalaraTaxes()                             |
| PX.Objects.PM              | ProformaEntry           | get_IsExternalTax()                                   |

| Namespace     | Simple Name   | Name                                     |
|---------------|---------------|--|
| PX.Objects.PM | ProformaEntry | CalculateAvalaraTax(PMProforma)          |
| PX.Objects.PM | ProformaEntry | CalculateAvalaraTax(PMProforma,Boolean)  |
| PX.Objects.PM | ProformaEntry | BuildGetTaxRequest(PMProforma)           |
| PX.Objects.PM | ProformaEntry | ApplyAvalaraTax(PMProforma,GetTaxResult) |
| PX.Objects.PM | ProformaEntry | LogMessages(BaseResult)                  |
| PX.Objects.PM | ProformaEntry | GetFromAddress(PMProforma)               |
| PX.Objects.PM | ProformaEntry | GetToAddress(PMProforma)                 |
| PX.Objects.PM | ProformaEntry | GetAvalaraLocationCode(PMProforma)       |
| PX.Objects.PM | ProformaEntry | IsSame(GetTaxRequest,GetTaxRequest)      |
| PX.Objects.PM | PMBudget      | get_CompletedPct()                       |
| PX.Objects.PM | PMBudget      | set_CompletedPct(Nullable<Decimal>)      |
| PX.Objects.PM | PMBudget      | get_AmountToInvoice()                    |
| PX.Objects.PM | PMBudget      | set_AmountToInvoice(Nullable<Decimal>)   |
| PX.Objects.PM | PMBudget      | get_LimitQty()                           |
| PX.Objects.PM | PMBudget      | set_LimitQty(Nullable<Boolean>)          |
| PX.Objects.PM | PMBudget      | get_LimitAmount()                        |
| PX.Objects.PM | PMBudget      | set_LimitAmount(Nullable<Boolean>)       |
| PX.Objects.PM | PMBudget      | get_MaxQty()                             |
| PX.Objects.PM | PMBudget      | set_MaxQty(Nullable<Decimal>)            |

| Namespace     | Simple Name             | Name   |
|---------------|-------------------------|--|
| PX.Objects.PM | PMBudget                | get_MaxAmount()  |
| PX.Objects.PM | PMBudget                | set_MaxAmount(Nullable<Decimal>)   |
| PX.Objects.PM | PMBillEngine            | PMDetail_ContractItemID_CacheAttached(PXCache)   |
| PX.Objects.PM | PMBillEngine            | PMDetail_TaskID_CacheAttached(PXCache)   |
| PX.Objects.PM | PMBillEngine            | BillRecurrentItems(List<PMDetail>,PMTask,<br>PMBillingRule,DateTime,Dictionary<Int32,Decimal>&, Dictionary<Int32,PMDetail>&) |
| PX.Objects.PM | PMBillEngine            | BillTask(PMProject,Customer,PMTask,PMBillingRule,<br>DateTime,Dictionary<Int32,Decimal>,Dictionary<Int32, PMDetail>)         |
| PX.Objects.PM | PMValidationFilter      | set_RecalculateDraftInvoicesAmount(Nullable<Boolean>)  |
| PX.Objects.PM | PMValidationFilter      | set_RebuildCommitments(Nullable<Boolean>)  |
| PX.Objects.PM | PMValidationFilter      | set_RecalculateChangeOrders(Nullable<Boolean>)   |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMBudget_IsTemplate_CacheAttached(PXCache)   |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_ContractID_CacheAttached(PXCache)   |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_TaskID_CacheAttached(PXCache)   |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_ContractItemID_CacheAttached(PXCache)   |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_ResetUsage_CacheAttached(PXCache)   |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_AccountSource_CacheAttached(PXCache)  |

| Namespace     | Simple Name             | Name  |
|---------------|-------------------------|---|
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_AccountID_CacheAttached(PXCache)                           |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_SubMask_CacheAttached(PXCache)                             |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_SubID_CacheAttached(PXCache)                               |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_PrePayment_CacheAttached(PXCache)                          |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_RevID_CacheAttached(PXCache)                               |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_LineNbr_CacheAttached(PXCache)                             |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_RowInserting(PXCache,PXRowInsertingEventArgs)              |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_RowUpdating(PXCache, PXRowUpdatingEventArgs)               |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_InventoryID_FieldUpdated (PXCache,PXFieldUpdatedEventArgs) |
| PX.Objects.PM | TemplateGlobalTaskMaint | OnPMDetailInventoryIDFieldUpdated (PXCache,PXFieldUpdatedEventArgs) |
| PX.Objects.PM | TemplateGlobalTaskMaint | PMDetail_RowSelected (PXCache,PXRowSelectedEventArgs)               |
| PX.Objects.PM | TemplateTaskMaint       | PMDetail_ContractID_CacheAttached(PXCache)                          |
| PX.Objects.PM | TemplateTaskMaint       | PMDetail_TaskID_CacheAttached(PXCache)                              |
| PX.Objects.PM | TemplateTaskMaint       | PMDetail_ContractItemID_CacheAttached(PXCache)                      |

| Namespace     | Simple Name       | Name  |
|---------------|-------------------|---|
| PX.Objects.PM | TemplateTaskMaint | PMDetail_ResetUsage_CacheAttached(PXCache)                              |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_AccountSource_CacheAttached(PXCache)                           |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_AccountID_CacheAttached(PXCache)                               |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_SubMask_CacheAttached(PXCache)                                 |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_SubID_CacheAttached(PXCache)                                   |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_PrePayment_CacheAttached(PXCache)                              |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_RevID_CacheAttached(PXCache)                                   |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_LineNbr_CacheAttached(PXCache)                                 |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_RowInserting(PXCache, PXRowInsertingEventArgs)                 |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_RowUpdating(PXCache, PXRowUpdatingEventArgs)                   |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_InventoryID_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)     |
| PX.Objects.PM | TemplateTaskMaint | OnPMDetailInventoryIDFieldUpdated(PXCache, PXFieldUpdatedEventArgs)     |
| PX.Objects.PM | TemplateTaskMaint | PMDetail_RowSelected(PXCache, PXRowSelectedEventArgs)                   |
| PX.Objects.PM | TemplateMaint     | PMProject_IsTemplate_CacheAttached(PXCache)                             |
| PX.Objects.PM | TemplateMaint     | PMDetail_ContractItemID_CacheAttached(PXCache)                          |
| PX.Objects.PM | TemplateMaint     | PMDetail_TaskID_CacheAttached(PXCache)                                  |
| PX.Objects.PM | TemplateMaint     | _(Events+FieldDefaulting<PMRevenueBudget, PMRevenueBudget+description>) |
| PX.Objects.PM | TemplateMaint     | _(Events+FieldSelecting<PMRevenueBudget, PMBudget+prepaymentPct>)       |
| PX.Objects.PM | TemplateMaint     | _(Events+FieldUpdated<PMRevenueBudget, PMBudget+prepaymentPct>)         |



| Namespace     | Simple Name     | Name   |
|---------------|-----------------|--|
| PX.Objects.PM | TemplateMaint   | _(Events+FieldVerifying<PMRevenueBudget, PMBudget+prepaymentAmount>)   |
| PX.Objects.PM | TemplateMaint   | _(Events+FieldUpdated<PMRevenueBudget, PMBudget+prepaymentAmount>)   |
| PX.Objects.PM | PMBillingRule   | get_IncludeZeroQty()   |
| PX.Objects.PM | PMBillingRule   | set_IncludeZeroQty(Nullable<Boolean>)  |
| PX.Objects.PM | RegisterEntry   | CreateTransaction(PMTimeActivity,Nullable<Int32>, DateTime,Nullable<Int32>, Nullable<Int32>,Nullable<Decimal>) |
| PX.Objects.PM | PMProject       | get_IsTemplate()   |
| PX.Objects.PM | PMProject       | set_IsTemplate(Nullable<Boolean>)  |
| PX.Objects.PM | PMTask          | get_LineCtr()  |
| PX.Objects.PM | PMTask          | set_LineCtr(Nullable<Int32>)   |
| PX.Objects.PM | GroupTypeFilter | get_EntityType()   |
| PX.Objects.PM | GroupTypeFilter | set_EntityType(String)   |
| PX.Objects.PM | ProjectEntry    | PMDetail_TaskID_CacheAttached(PXCache)   |
| PX.Objects.PM | ProjectEntry    | PMDetail_ContractItemID_CacheAttached(PXCache)   |
| PX.Objects.PM | ProjectEntry    | _(Events+FieldDefaulting<PMRevenueBudget, PMRevenueBudget+description>)  |
| PX.Objects.PM | ProjectEntry    | _(Events+RowPersisting<PMRevenueBudget>)   |
| PX.Objects.PM | ProjectEntry    | _(Events+FieldSelecting<PMRevenueBudget, PMBudget+prepaymentPct>)  |
| PX.Objects.PM | ProjectEntry    | _(Events+FieldVerifying<PMRevenueBudget, PMBudget+prepaymentPct>)  |
| PX.Objects.PM | ProjectEntry    | _(Events+FieldUpdated<PMRevenueBudget, PMBudget+prepaymentPct>)  |

| Namespace     | Simple Name      | Name   |
|---------------|------------------|--|
| PX.Objects.PM | ProjectEntry     | _(Events+FieldVerifying<PMRevenueBudget, PMBudget+prepaymentAmount>) |
| PX.Objects.PM | ProjectEntry     | _(Events+FieldUpdated<PMRevenueBudget, PMBudget+prepaymentAmount>)   |
| PX.Objects.PM | ProjectEntry     | CopyTask(PMTask,Int32)   |
| PX.Objects.PM | ProjectEntry     | DefaultFromTemplate(PMProject,PXCache)                               |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_ContractID_CacheAttached(PXCache)                           |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_TaskID_CacheAttached(PXCache)                               |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_ContractItemID_CacheAttached(PXCache)                       |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_ResetUsage_CacheAttached(PXCache)                           |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_AccountSource_CacheAttached(PXCache)                        |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_AccountID_CacheAttached(PXCache)                            |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_SubMask_CacheAttached(PXCache)                              |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_SubID_CacheAttached(PXCache)                                |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_RevID_CacheAttached(PXCache)                                |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_LineNbr_CacheAttached(PXCache)                              |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_RowInserting(PXCache,PXRowInsertingEventArgs)               |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_RowUpdating(PXCache, PXRowUpdatingEventArgs)                |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_InventoryID_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)  |
| PX.Objects.PM | ProjectTaskEntry | OnPMDetailInventoryIDFieldUpdated(PXCache, PXFieldUpdatedEventArgs)  |
| PX.Objects.PM | ProjectTaskEntry | PMDetail_RowSelected(PXCache, PXRowSelectedEventArgs)                |

| Namespace     | Simple Name     | Name   |
|---------------|-----------------|--|
| PX.Objects.PO | POReceiptLineR1 | get_CuryInfoID()                               |
| PX.Objects.PO | POReceiptLineR1 | set_CuryInfoID(Nullable<Int64>)                |
| PX.Objects.PO | POReceiptLineR1 | get_Qty()                                      |
| PX.Objects.PO | POReceiptLineR1 | set_Qty(Nullable<Decimal>)                     |
| PX.Objects.PO | POReceiptLineR1 | get_CuryExtCost()                              |
| PX.Objects.PO | POReceiptLineR1 | set_CuryExtCost(Nullable<Decimal>)             |
| PX.Objects.PO | POReceiptLineR1 | get_CuryUnbilledAmt()                          |
| PX.Objects.PO | POReceiptLineR1 | set_CuryUnbilledAmt(Nullable<Decimal>)         |
| PX.Objects.PO | POReceiptLineR1 | get_UnbilledAmt()                              |
| PX.Objects.PO | POReceiptLineR1 | set_UnbilledAmt(Nullable<Decimal>)             |
| PX.Objects.PO | POReceiptLineR1 | get_CuryPOAccrualAmt()                         |
| PX.Objects.PO | POReceiptLineR1 | set_CuryPOAccrualAmt(Nullable<Decimal>)        |
| PX.Objects.PO | POReceiptLineR1 | get_POAccrualAmt()                             |
| PX.Objects.PO | POReceiptLineR1 | set_POAccrualAmt(Nullable<Decimal>)            |
| PX.Objects.PO | POReceiptLineR1 | get_CuryUnbilledDiscountAmt()                  |
| PX.Objects.PO | POReceiptLineR1 | set_CuryUnbilledDiscountAmt(Nullable<Decimal>) |
| PX.Objects.PO | POReceiptLineR1 | get_UnbilledDiscountAmt()                      |
| PX.Objects.PO | POReceiptLineR1 | set_UnbilledDiscountAmt(Nullable<Decimal>)     |
| PX.Objects.PO | POReceiptLineR1 | get_CuryUnbilledExtCost()                      |

| Namespace     | Simple Name            | Name   |
|---------------|------------------------|--|
| PX.Objects.PO | POReceiptLineR1        | set_CuryUnbilledExtCost(Nullable<Decimal>)             |
| PX.Objects.PO | POReceiptLineR1        | get_UnbilledExtCost()                                  |
| PX.Objects.PO | POReceiptLineR1        | set_UnbilledExtCost(Nullable<Decimal>)                 |
| PX.Objects.PO | POReceiptLineR1        | get_CuryUnitCost()                                     |
| PX.Objects.PO | POReceiptLineR1        | set_CuryUnitCost(Nullable<Decimal>)                    |
| PX.Objects.PO | POReceiptLineR1        | get_BillPPVAmt()                                       |
| PX.Objects.PO | POReceiptLineR1        | set_BillPPVAmt(Nullable<Decimal>)                      |
| PX.Objects.PO | POReceiptLineR1        | get_ReversedBillPPVAmt()                               |
| PX.Objects.PO | POReceiptLineR1        | set_ReversedBillPPVAmt(Nullable<Decimal>)              |
| PX.Objects.PO | POReceiptLineR1        | get_UnitCost()   |
| PX.Objects.PO | POReceiptLineR1        | set_UnitCost(Nullable<Decimal>)                        |
| PX.Objects.PO | POReceiptLineR1        | get_GroupDiscountRate()                                |
| PX.Objects.PO | POReceiptLineR1        | set_GroupDiscountRate(Nullable<Decimal>)               |
| PX.Objects.PO | POReceiptLineR1        | get_DocumentDiscountRate()                             |
| PX.Objects.PO | POReceiptLineR1        | set_DocumentDiscountRate(Nullable<Decimal>)            |
| PX.Objects.PO | POReceiptLineR1        | get_TaxCategoryID()                                    |
| PX.Objects.PO | POReceiptLineR1        | set_TaxCategoryID(String)                              |
| PX.Objects.PO | IAPTranSource          | get_IsBillAmtChanged()                                 |
| PX.Objects.PO | PORetainedTaxAttribute | _CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal) |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.PO | POOrderDiscountDetail | set_LineNbr(Nullable<Int32>)                           |
| PX.Objects.PO | POTaxTran             | get_CuryOpenTaxableAmt()                               |
| PX.Objects.PO | POTaxTran             | set_CuryOpenTaxableAmt(Nullable<Decimal>)              |
| PX.Objects.PO | POTaxTran             | get_OpenTaxableAmt()                                   |
| PX.Objects.PO | POTaxTran             | set_OpenTaxableAmt(Nullable<Decimal>)                  |
| PX.Objects.PO | POTaxTran             | get_CuryOpenTaxAmt()                                   |
| PX.Objects.PO | POTaxTran             | set_CuryOpenTaxAmt(Nullable<Decimal>)                  |
| PX.Objects.PO | POTaxTran             | get_OpenTaxAmt()                                       |
| PX.Objects.PO | POTaxTran             | set_OpenTaxAmt(Nullable<Decimal>)                      |
| PX.Objects.PO | POExternalTaxCalc     | Process(PORceipt)                                      |
| PX.Objects.PO | POExternalTaxCalc     | Process(List<PORceipt>, Boolean)                       |
| PX.Objects.PO | LandedCostCodeMaint   | ValidateAllocationApplication(PXCache, LandedCostCode) |
| PX.Objects.PO | LandedCostCode        | get_ApplicationMethod()                                |
| PX.Objects.PO | LandedCostCode        | set_ApplicationMethod(String)                          |
| PX.Objects.PO | PORceipt              | get_IsTaxValid()                                       |
| PX.Objects.PO | PORceipt              | set_IsTaxValid(Nullable<Boolean>)                      |
| PX.Objects.PO | PORceipt              | get_IsUnbilledTaxValid()                               |
| PX.Objects.PO | PORceipt              | set_IsUnbilledTaxValid(Nullable<Boolean>)              |
| PX.Objects.PO | PORceipt              | get_CuryLineTotal()                                    |

| Namespace     | Simple Name | Name                                       |
|---------------|-------------|--|
| PX.Objects.PO | POReceipt   | set_CuryLineTotal(Nullable<Decimal>)       |
| PX.Objects.PO | POReceipt   | get_LineTotal()                            |
| PX.Objects.PO | POReceipt   | set_LineTotal(Nullable<Decimal>)           |
| PX.Objects.PO | POReceipt   | get_CuryDiscTot()                          |
| PX.Objects.PO | POReceipt   | set_CuryDiscTot(Nullable<Decimal>)         |
| PX.Objects.PO | POReceipt   | get_DiscTot()                              |
| PX.Objects.PO | POReceipt   | set_DiscTot(Nullable<Decimal>)             |
| PX.Objects.PO | POReceipt   | get_CuryUnbilledDiscTot()                  |
| PX.Objects.PO | POReceipt   | set_CuryUnbilledDiscTot(Nullable<Decimal>) |
| PX.Objects.PO | POReceipt   | get_UnbilledDiscTot()                      |
| PX.Objects.PO | POReceipt   | set_UnbilledDiscTot(Nullable<Decimal>)     |
| PX.Objects.PO | POReceipt   | get_DocDisc()                              |
| PX.Objects.PO | POReceipt   | set_DocDisc(Nullable<Decimal>)             |
| PX.Objects.PO | POReceipt   | get_CuryDocDisc()                          |
| PX.Objects.PO | POReceipt   | set_CuryDocDisc(Nullable<Decimal>)         |
| PX.Objects.PO | POReceipt   | get_OrderTotal()                           |
| PX.Objects.PO | POReceipt   | set_OrderTotal(Nullable<Decimal>)          |
| PX.Objects.PO | POReceipt   | get_CuryTaxTotal()                         |
| PX.Objects.PO | POReceipt   | set_CuryTaxTotal(Nullable<Decimal>)        |

| Namespace     | Simple Name | Name                                       |
|---------------|-------------|--|
| PX.Objects.PO | POReceipt   | get_TaxTotal()                             |
| PX.Objects.PO | POReceipt   | set_TaxTotal(Nullable<Decimal>)            |
| PX.Objects.PO | POReceipt   | get_CuryVatExemptTotal()                   |
| PX.Objects.PO | POReceipt   | set_CuryVatExemptTotal(Nullable<Decimal>)  |
| PX.Objects.PO | POReceipt   | get_VatExemptTotal()                       |
| PX.Objects.PO | POReceipt   | set_VatExemptTotal(Nullable<Decimal>)      |
| PX.Objects.PO | POReceipt   | get_CuryVatTaxableTotal()                  |
| PX.Objects.PO | POReceipt   | set_CuryVatTaxableTotal(Nullable<Decimal>) |
| PX.Objects.PO | POReceipt   | get_VatTaxableTotal()                      |
| PX.Objects.PO | POReceipt   | set_VatTaxableTotal(Nullable<Decimal>)     |
| PX.Objects.PO | POReceipt   | get_TaxZoneID()                            |
| PX.Objects.PO | POReceipt   | set_TaxZoneID(String)                      |
| PX.Objects.PO | POReceipt   | get_TermsID()                              |
| PX.Objects.PO | POReceipt   | set_TermsID(String)                        |
| PX.Objects.PO | POReceipt   | get_ControlTotal()                         |
| PX.Objects.PO | POReceipt   | set_ControlTotal(Nullable<Decimal>)        |
| PX.Objects.PO | POReceipt   | get_CuryDiscAmt()                          |
| PX.Objects.PO | POReceipt   | set_CuryDiscAmt(Nullable<Decimal>)         |
| PX.Objects.PO | POReceipt   | get_DiscAmt()                              |

| Namespace     | Simple Name | Name   |
|---------------|-------------|--|
| PX.Objects.PO | POReceipt   | set_DiscAmt(Nullable<Decimal>)               |
| PX.Objects.PO | POReceipt   | get_DueDate()                                |
| PX.Objects.PO | POReceipt   | set_DueDate(Nullable<DateTime>)              |
| PX.Objects.PO | POReceipt   | get_DiscDate()                               |
| PX.Objects.PO | POReceipt   | set_DiscDate(Nullable<DateTime>)             |
| PX.Objects.PO | POReceipt   | get_CuryUnbilledTotal()                      |
| PX.Objects.PO | POReceipt   | set_CuryUnbilledTotal(Nullable<Decimal>)     |
| PX.Objects.PO | POReceipt   | get_UnbilledTotal()                          |
| PX.Objects.PO | POReceipt   | set_UnbilledTotal(Nullable<Decimal>)         |
| PX.Objects.PO | POReceipt   | get_CuryUnbilledLineTotal()                  |
| PX.Objects.PO | POReceipt   | set_CuryUnbilledLineTotal(Nullable<Decimal>) |
| PX.Objects.PO | POReceipt   | get_UnbilledLineTotal()                      |
| PX.Objects.PO | POReceipt   | set_UnbilledLineTotal(Nullable<Decimal>)     |
| PX.Objects.PO | POReceipt   | get_CuryUnbilledTaxTotal()                   |
| PX.Objects.PO | POReceipt   | set_CuryUnbilledTaxTotal(Nullable<Decimal>)  |
| PX.Objects.PO | POReceipt   | get_UnbilledTaxTotal()                       |
| PX.Objects.PO | POReceipt   | set_UnbilledTaxTotal(Nullable<Decimal>)      |
| PX.Objects.PO | POReceipt   | get_PayToVendorID()                          |
| PX.Objects.PO | POReceipt   | set_PayToVendorID(Nullable<Int32>)           |



| Namespace     | Simple Name   | Name                                      |
|---------------|---------------|---|
| PX.Objects.PO | POReceiptType | GetINDocType(String)                      |
| PX.Objects.PO | POReceiptType | InvtMult(String)                          |
| PX.Objects.PO | POReceiptLine | get_BaseMultReceiptQty()                  |
| PX.Objects.PO | POReceiptLine | set_BaseMultReceiptQty(Nullable<Decimal>) |
| PX.Objects.PO | POReceiptLine | get_DiscPct()                             |
| PX.Objects.PO | POReceiptLine | set_DiscPct(Nullable<Decimal>)            |
| PX.Objects.PO | POReceiptLine | get_CuryDiscAmt()                         |
| PX.Objects.PO | POReceiptLine | set_CuryDiscAmt(Nullable<Decimal>)        |
| PX.Objects.PO | POReceiptLine | get_DiscAmt()                             |
| PX.Objects.PO | POReceiptLine | set_DiscAmt(Nullable<Decimal>)            |
| PX.Objects.PO | POReceiptLine | get_ManualDisc()                          |
| PX.Objects.PO | POReceiptLine | set_ManualDisc(Nullable<Boolean>)         |
| PX.Objects.PO | POReceiptLine | get_LineAmt()                             |
| PX.Objects.PO | POReceiptLine | set_LineAmt(Nullable<Decimal>)            |
| PX.Objects.PO | POReceiptLine | get_CuryDiscCost()                        |
| PX.Objects.PO | POReceiptLine | set_CuryDiscCost(Nullable<Decimal>)       |
| PX.Objects.PO | POReceiptLine | get_DiscCost()                            |
| PX.Objects.PO | POReceiptLine | set_DiscCost(Nullable<Decimal>)           |
| PX.Objects.PO | POReceiptLine | get_CuryExtCost()                         |

| Namespace     | Simple Name   | Name                                     |
|---------------|---------------|--|
| PX.Objects.PO | POReceiptLine | set_CuryExtCost(Nullable<Decimal>)       |
| PX.Objects.PO | POReceiptLine | get_ExtCost()                            |
| PX.Objects.PO | POReceiptLine | set_ExtCost(Nullable<Decimal>)           |
| PX.Objects.PO | POReceiptLine | get_CuryMultExtCost()                    |
| PX.Objects.PO | POReceiptLine | set_CuryMultExtCost(Nullable<Decimal>)   |
| PX.Objects.PO | POReceiptLine | get_MultExtCost()                        |
| PX.Objects.PO | POReceiptLine | set_MultExtCost(Nullable<Decimal>)       |
| PX.Objects.PO | POReceiptLine | get_TaxCategoryID()                      |
| PX.Objects.PO | POReceiptLine | set_TaxCategoryID(String)                |
| PX.Objects.PO | POReceiptLine | get_TaxID()                              |
| PX.Objects.PO | POReceiptLine | set_TaxID(String)                        |
| PX.Objects.PO | POReceiptLine | get_VoucheredQty()                       |
| PX.Objects.PO | POReceiptLine | set_VoucheredQty(Nullable<Decimal>)      |
| PX.Objects.PO | POReceiptLine | get_BaseVoucheredQty()                   |
| PX.Objects.PO | POReceiptLine | set_BaseVoucheredQty(Nullable<Decimal>)  |
| PX.Objects.PO | POReceiptLine | get_CuryVoucheredCost()                  |
| PX.Objects.PO | POReceiptLine | set_CuryVoucheredCost(Nullable<Decimal>) |
| PX.Objects.PO | POReceiptLine | get_VoucheredCost()                      |
| PX.Objects.PO | POReceiptLine | set_VoucheredCost(Nullable<Decimal>)     |

| Namespace     | Simple Name   | Name   |
|---------------|---------------|--|
| PX.Objects.PO | POReceiptLine | get_VoucherStatus()                            |
| PX.Objects.PO | POReceiptLine | set_VoucherStatus(String)                      |
| PX.Objects.PO | POReceiptLine | get_BillPPVAmt()                               |
| PX.Objects.PO | POReceiptLine | set_BillPPVAmt(Nullable<Decimal>)              |
| PX.Objects.PO | POReceiptLine | get_ReversedBillPPVAmt()                       |
| PX.Objects.PO | POReceiptLine | set_ReversedBillPPVAmt(Nullable<Decimal>)      |
| PX.Objects.PO | POReceiptLine | get_CuryUnbilledAmt()                          |
| PX.Objects.PO | POReceiptLine | set_CuryUnbilledAmt(Nullable<Decimal>)         |
| PX.Objects.PO | POReceiptLine | get_UnbilledAmt()                              |
| PX.Objects.PO | POReceiptLine | set_UnbilledAmt(Nullable<Decimal>)             |
| PX.Objects.PO | POReceiptLine | get_CuryPOAccrualAmt()                         |
| PX.Objects.PO | POReceiptLine | set_CuryPOAccrualAmt(Nullable<Decimal>)        |
| PX.Objects.PO | POReceiptLine | get_POAccrualAmt()                             |
| PX.Objects.PO | POReceiptLine | set_POAccrualAmt(Nullable<Decimal>)            |
| PX.Objects.PO | POReceiptLine | get_CuryUnbilledDiscountAmt()                  |
| PX.Objects.PO | POReceiptLine | set_CuryUnbilledDiscountAmt(Nullable<Decimal>) |
| PX.Objects.PO | POReceiptLine | get_UnbilledDiscountAmt()                      |
| PX.Objects.PO | POReceiptLine | set_UnbilledDiscountAmt(Nullable<Decimal>)     |
| PX.Objects.PO | POReceiptLine | get_CuryUnbilledExtCost()                      |

| Namespace     | Simple Name         | Name   |
|---------------|---------------------|--|
| PX.Objects.PO | POReceiptLine       | set_CuryUnbilledExtCost(Nullable<Decimal>)                                 |
| PX.Objects.PO | POReceiptLine       | get_UnbilledExtCost()  |
| PX.Objects.PO | POReceiptLine       | set_UnbilledExtCost(Nullable<Decimal>)                                     |
| PX.Objects.PO | POReceiptLine       | get_DiscountID()   |
| PX.Objects.PO | POReceiptLine       | set_DiscountID(String)   |
| PX.Objects.PO | POReceiptLine       | get_DiscountSequenceID()   |
| PX.Objects.PO | POReceiptLine       | set_DiscountSequenceID(String)   |
| PX.Objects.PO | POReceiptLine       | get_FreezeManualDisc()   |
| PX.Objects.PO | POReceiptLine       | set_FreezeManualDisc(Nullable<Boolean>)                                    |
| PX.Objects.PO | POLandedCostProcess | ReleaseDoc(List<POReceiptLCInfo>)  |
| PX.Objects.PO | POReceiptEntry      | Inquiry(PXAdapter)   |
| PX.Objects.PO | POReceiptEntry      | ViewINDocument(PXAdapter)  |
| PX.Objects.PO | POReceiptEntry      | ViewAPDocument(PXAdapter)  |
| PX.Objects.PO | POReceiptEntry      | ViewLCINDocument(PXAdapter)  |
| PX.Objects.PO | POReceiptEntry      | ViewLCAPInvoice(PXAdapter)   |
| PX.Objects.PO | POReceiptEntry      | RecalculateDiscountsAction(PXAdapter)                                      |
| PX.Objects.PO | POReceiptEntry      | RecalcOk(PXAdapter)  |
| PX.Objects.PO | POReceiptEntry      | POReceipt_RowPersisting(PXCache, PXRowPersistingEventArgs)                 |
| PX.Objects.PO | POReceiptEntry      | POReceipt_PayToVendorID_FieldVerifying(PXCache, PXFieldVerifyingEventArgs) |

| Namespace     | Simple Name    | Name   |
|---------------|----------------|--|
| PX.Objects.PO | POReceiptEntry | POReceipt_PayToVendorID_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)             |
| PX.Objects.PO | POReceiptEntry | POReceipt_AutoCreateInvoice_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)         |
| PX.Objects.PO | POReceiptEntry | POReceipt_TermsID_FieldDefaulting(PXCache, PXFieldDefaultingEventArgs)             |
| PX.Objects.PO | POReceiptEntry | POReceiptLine_TaxCategoryID_FieldDefaulting (PXCache,PXFieldDefaultingEventArgs)   |
| PX.Objects.PO | POReceiptEntry | POReceiptLine_CuryUnitCost_FieldDefaulting (PXCache,PXFieldDefaultingEventArgs)    |
| PX.Objects.PO | POReceiptEntry | POReceiptLine_CuryUnitCost_FieldVerifying (PXCache,PXFieldVerifyingEventArgs)      |
| PX.Objects.PO | POReceiptEntry | POReceiptLine_ReasonCode_FieldUpdated (PXCache,PXFieldUpdatedEventArgs)            |
| PX.Objects.PO | POReceiptEntry | POReceiptLine_DiscountID_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)            |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_LandedCostCodeID_FieldUpdated (PXCache,PXFieldUpdatedEventArgs)     |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_PostponeAP_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)           |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_VendorID_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)             |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_InvoiceDate_FieldVerifying(PXCache, PXFieldVerifyingEventArgs)      |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_VendorLocationID_FieldVerifying (PXCache,PXFieldVerifyingEventArgs) |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_VendorLocationID_FieldUpdated (PXCache,PXFieldUpdatedEventArgs)     |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_RowPersisting(PXCache, PXRowPersistingEventArgs)                    |
| PX.Objects.PO | POReceiptEntry | LandedCostTran_RowDeleting(PXCache, PXRowDeletingEventArgs)                        |
| PX.Objects.PO | POReceiptEntry | POReceiptDiscountDetail_RowSelected(PXCache, PXRowSelectedEventArgs)               |
| PX.Objects.PO | POReceiptEntry | POReceiptDiscountDetail_RowInserted(PXCache, PXRowInsertedEventArgs)               |
| PX.Objects.PO | POReceiptEntry | POReceiptDiscountDetail_RowUpdated(PXCache, PXRowUpdatedEventArgs)                 |

| Namespace     | Simple Name    | Name   |
|---------------|----------------|--|
| PX.Objects.PO | POReceiptEntry | POReceiptDiscountDetail_RowDeleted(PXCache, PXRowDeletedEventArgs)   |
| PX.Objects.PO | POReceiptEntry | POReceiptTaxTran_RowSelected(PXCache, PXRowSelectedEventArgs)  |
| PX.Objects.PO | POReceiptEntry | Copy(POReceiptLine, POLine, Decimal, Decimal, Decimal)   |
| PX.Objects.PO | POReceiptEntry | ClearUnused(POReceiptLine, String)   |
| PX.Objects.PO | POReceiptEntry | ValidateLCTran(LandedCostTran, String&)  |
| PX.Objects.PO | POReceiptEntry | ReleaseReturn(INIssueEntry, APIInvoiceEntry, POReceipt, DocumentList<INRegister>, DocumentList<APIInvoice>, Boolean) |
| PX.Objects.PO | POReceiptEntry | ReleaseLandedCostTrans(POReceipt, DocumentList<INRegister>, DocumentList<APIInvoice>)                                |
| PX.Objects.PO | POReceiptEntry | get_IsExternalTax()  |
| PX.Objects.PO | POReceiptEntry | CalculateAvalaraTax(POReceipt)   |
| PX.Objects.PO | POReceiptEntry | BuildGetTaxRequest(POReceipt)  |
| PX.Objects.PO | POReceiptEntry | BuildGetTaxRequestUnbilled(POReceipt)  |
| PX.Objects.PO | POReceiptEntry | ApplyAvalaraTax(POReceipt, GetTaxResult, GetTaxResult)   |
| PX.Objects.PO | POReceiptEntry | LogMessages(BaseResult)  |
| PX.Objects.PO | POReceiptEntry | GetToAddress(POReceipt)  |
| PX.Objects.PO | POReceiptEntry | GetBranchLocation(POReceipt)   |
| PX.Objects.PO | POReceiptEntry | GetFromAddress(POReceipt)  |
| PX.Objects.PO | POReceiptEntry | GetAvalaraLocationCode(POReceipt)  |
| PX.Objects.PO | POReceiptEntry | RecalculateDiscounts(PXCache, POReceiptLine)   |

| Namespace     | Simple Name    | Name                                    |
|---------------|----------------|---|
| PX.Objects.PO | POOrderFilter  | get_AnyCurrency()                       |
| PX.Objects.PO | POOrderFilter  | set_AnyCurrency(Nullable<Boolean>)      |
| PX.Objects.PO | POLineS        | get_ClosedQty()                         |
| PX.Objects.PO | POLineS        | set_ClosedQty(Nullable<Decimal>)        |
| PX.Objects.PO | POLineS        | get_CuryClosedAmt()                     |
| PX.Objects.PO | POLineS        | set_CuryClosedAmt(Nullable<Decimal>)    |
| PX.Objects.PO | POOrderS       | get_CuryReceivedCost()                  |
| PX.Objects.PO | POOrderS       | set_CuryReceivedCost(Nullable<Decimal>) |
| PX.Objects.PO | POOrderS       | get_ReceivedCost()                      |
| PX.Objects.PO | POOrderS       | set_ReceivedCost(Nullable<Decimal>)     |
| PX.Objects.PO | POOrderS       | get_CuryLeftToReceiveCost()             |
| PX.Objects.PO | POOrderS       | get_LeftToReceiveCost()                 |
| PX.Objects.PO | POReceiptLineS | get_CuryUnitCost()                      |
| PX.Objects.PO | POReceiptLineS | set_CuryUnitCost(Nullable<Decimal>)     |
| PX.Objects.PO | POReceiptLineS | get_CuryExtCost()                       |
| PX.Objects.PO | POReceiptLineS | set_CuryExtCost(Nullable<Decimal>)      |
| PX.Objects.PO | POLineR        | get_CuryReceivedCost()                  |
| PX.Objects.PO | POLineR        | set_CuryReceivedCost(Nullable<Decimal>) |
| PX.Objects.PO | POLineR        | get_ReceivedCost()                      |

| Namespace     | Simple Name | Name                                 |
|---------------|-------------|--------------------------------------|
| PX.Objects.PO | POLineR     | set_ReceivedCost(Nullable<Decimal>)  |
| PX.Objects.PO | POLineUOpen | get_Completed()                      |
| PX.Objects.PO | POLineUOpen | set_Completed(Nullable<Boolean>)     |
| PX.Objects.PO | POLineUOpen | get_BaseOrderQty()                   |
| PX.Objects.PO | POLineUOpen | set_BaseOrderQty(Nullable<Decimal>)  |
| PX.Objects.PO | POLineUOpen | get_OpenQty()                        |
| PX.Objects.PO | POLineUOpen | set_OpenQty(Nullable<Decimal>)       |
| PX.Objects.PO | POLineUOpen | get_BaseOpenQty()                    |
| PX.Objects.PO | POLineUOpen | set_BaseOpenQty(Nullable<Decimal>)   |
| PX.Objects.PO | POLineUOpen | get_CuryOpenAmt()                    |
| PX.Objects.PO | POLineUOpen | set_CuryOpenAmt(Nullable<Decimal>)   |
| PX.Objects.PO | POLineUOpen | get_OpenAmt()                        |
| PX.Objects.PO | POLineUOpen | set_OpenAmt(Nullable<Decimal>)       |
| PX.Objects.PO | POLineUOpen | get_tstamp()                         |
| PX.Objects.PO | POLineUOpen | set_tstamp(Byte[])                   |
| PX.Objects.PO | POLine      | get_ClosedQty()                      |
| PX.Objects.PO | POLine      | set_ClosedQty(Nullable<Decimal>)     |
| PX.Objects.PO | POLine      | get_CuryClosedAmt()                  |
| PX.Objects.PO | POLine      | set_CuryClosedAmt(Nullable<Decimal>) |



| Namespace     | Simple Name | Name                                     |
|---------------|-------------|--|
| PX.Objects.PO | POLine      | get_VoucheredQty()                       |
| PX.Objects.PO | POLine      | set_VoucheredQty(Nullable<Decimal>)      |
| PX.Objects.PO | POLine      | get_BaseVoucheredQty()                   |
| PX.Objects.PO | POLine      | set_BaseVoucheredQty(Nullable<Decimal>)  |
| PX.Objects.PO | POLine      | get_CuryVoucheredCost()                  |
| PX.Objects.PO | POLine      | set_CuryVoucheredCost(Nullable<Decimal>) |
| PX.Objects.PO | POLine      | get_VoucheredCost()                      |
| PX.Objects.PO | POLine      | set_VoucheredCost(Nullable<Decimal>)     |
| PX.Objects.PO | POLine      | get_ReceivedCost()                       |
| PX.Objects.PO | POLine      | set_ReceivedCost(Nullable<Decimal>)      |
| PX.Objects.PO | POLine      | get_VoucherStatus()                      |
| PX.Objects.PO | POLine      | set_VoucherStatus(String)                |
| PX.Objects.PO | POLine      | get_OpenQty()                            |
| PX.Objects.PO | POLine      | set_OpenQty(Nullable<Decimal>)           |
| PX.Objects.PO | POLine      | get_BaseOpenQty()                        |
| PX.Objects.PO | POLine      | set_BaseOpenQty(Nullable<Decimal>)       |
| PX.Objects.PO | POLine      | get_CuryOpenAmt()                        |
| PX.Objects.PO | POLine      | set_CuryOpenAmt(Nullable<Decimal>)       |
| PX.Objects.PO | POLine      | get_OpenAmt()                            |

| Namespace     | Simple Name | Name                                      |
|---------------|-------------|---|
| PX.Objects.PO | POLine      | set_OpenAmt(Nullable<Decimal>)            |
| PX.Objects.PO | POLine      | get_Completed()                           |
| PX.Objects.PO | POLine      | set_Completed(Nullable<Boolean>)          |
| PX.Objects.PO | POLine      | CompareReferenceKey(APTran)               |
| PX.Objects.PO | POLine      | SetReferenceKeyTo(APTran)                 |
| PX.Objects.PO | POLine      | get_IsReturn()                            |
| PX.Objects.PO | POOrder     | get_IsOpenTaxValid()                      |
| PX.Objects.PO | POOrder     | set_IsOpenTaxValid(Nullable<Boolean>)     |
| PX.Objects.PO | POOrder     | get_CuryOpenOrderTotal()                  |
| PX.Objects.PO | POOrder     | set_CuryOpenOrderTotal(Nullable<Decimal>) |
| PX.Objects.PO | POOrder     | get_OpenOrderTotal()                      |
| PX.Objects.PO | POOrder     | set_OpenOrderTotal(Nullable<Decimal>)     |
| PX.Objects.PO | POOrder     | get_CuryOpenLineTotal()                   |
| PX.Objects.PO | POOrder     | set_CuryOpenLineTotal(Nullable<Decimal>)  |
| PX.Objects.PO | POOrder     | get_OpenLineTotal()                       |
| PX.Objects.PO | POOrder     | set_OpenLineTotal(Nullable<Decimal>)      |
| PX.Objects.PO | POOrder     | get_CuryOpenTaxTotal()                    |
| PX.Objects.PO | POOrder     | set_CuryOpenTaxTotal(Nullable<Decimal>)   |
| PX.Objects.PO | POOrder     | get_OpenTaxTotal()                        |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.PO | POOrder               | set_OpenTaxTotal(Nullable<Decimal>)                        |
| PX.Objects.PO | POOrder               | get_OpenOrderQty()   |
| PX.Objects.PO | POOrder               | set_OpenOrderQty(Nullable<Decimal>)                        |
| PX.Objects.PO | POTax                 | get_CuryOpenTaxableAmt()                                   |
| PX.Objects.PO | POTax                 | set_CuryOpenTaxableAmt(Nullable<Decimal>)                  |
| PX.Objects.PO | POTax                 | get_OpenTaxableAmt()                                       |
| PX.Objects.PO | POTax                 | set_OpenTaxableAmt(Nullable<Decimal>)                      |
| PX.Objects.PO | POTax                 | get_CuryOpenTaxAmt()                                       |
| PX.Objects.PO | POTax                 | set_CuryOpenTaxAmt(Nullable<Decimal>)                      |
| PX.Objects.PO | POTax                 | get_OpenTaxAmt()   |
| PX.Objects.PO | POTax                 | set_OpenTaxAmt(Nullable<Decimal>)                          |
| PX.Objects.PO | POTaxAttribute        | CalcDocTotals(PXCache, Object, Decimal, Decimal, Decimal)  |
| PX.Objects.PO | POTaxAttribute        | _CalcDocTotals(PXCache, Object, Decimal, Decimal, Decimal) |
| PX.Objects.PO | POOpenPeriodAttribute | IsValidPeriod(PXCache, Object, Object)                     |
| PX.Objects.PO | POOrderEntry          | Inquiry(PXAdapter, Nullable<Int32>)                        |
| PX.Objects.PO | POOrderEntry          | Report(PXAdapter, String, Boolean, Boolean)                |
| PX.Objects.PO | POOrderEntry          | NeedsPOReceipt(POLine, Boolean)                            |
| PX.Objects.PO | POOrderEntry          | NeedsAPIInvoice(POLine, Boolean)                           |
| PX.Objects.PO | POOrderEntry          | ResetProjectOnAccountChange(PXCache, POLine, Object)       |

| Namespace     | Simple Name  | Name   |
|---------------|--------------|--|
| PX.Objects.PO | POOrderEntry | get_IsExternalTax()                                |
| PX.Objects.PO | POOrderEntry | CalculateAvalaraTax(POOrder)                       |
| PX.Objects.PO | POOrderEntry | BuildGetTaxRequest(POOrder)                        |
| PX.Objects.PO | POOrderEntry | BuildGetTaxRequestOpen(POOrder)                    |
| PX.Objects.PO | POOrderEntry | ApplyAvalaraTax(POOrder,GetTaxResult,GetTaxResult) |
| PX.Objects.PO | POOrderEntry | LogMessages(BaseResult)                            |
| PX.Objects.PO | POOrderEntry | GetToAddress(POOrder)                              |
| PX.Objects.PO | POOrderEntry | GetBranchLocation(POOrder)                         |
| PX.Objects.PO | POOrderEntry | GetFromAddress(POOrder)                            |
| PX.Objects.PO | POOrderEntry | GetAvalaraLocationCode(POOrder)                    |
| PX.Objects.PO | POLineS      | get_CuryReceivedCost()                             |
| PX.Objects.PO | POLineS      | set_CuryReceivedCost(Nullable<Decimal>)            |
| PX.Objects.PO | POLineS      | get_ReceivedCost()                                 |
| PX.Objects.PO | POLineS      | set_ReceivedCost(Nullable<Decimal>)                |
| PX.Objects.PO | POOrderS     | get_CuryReceivedCost()                             |
| PX.Objects.PO | POOrderS     | set_CuryReceivedCost(Nullable<Decimal>)            |
| PX.Objects.PO | POOrderS     | get_ReceivedCost()                                 |
| PX.Objects.PO | POOrderS     | set_ReceivedCost(Nullable<Decimal>)                |
| PX.Objects.PO | POOrderS     | get_OpenLineQty()                                  |

| Namespace     | Simple Name      | Name   |
|---------------|------------------|--|
| PX.Objects.PO | POOrderS         | set_OpenLineQty(Nullable<Decimal>)                         |
| PX.Objects.PO | POOrderS         | get_BaseOpenLineQty()                                      |
| PX.Objects.PO | POOrderS         | set_BaseOpenLineQty(Nullable<Decimal>)                     |
| PX.Objects.PO | POOrderS         | get_CuryOpenLineCost()                                     |
| PX.Objects.PO | POOrderS         | set_CuryOpenLineCost(Nullable<Decimal>)                    |
| PX.Objects.PO | POOrderS         | get_OpenLineCost()   |
| PX.Objects.PO | POOrderS         | set_OpenLineCost(Nullable<Decimal>)                        |
| PX.Objects.PO | POOrderS         | get_IsOpenTaxValid()                                       |
| PX.Objects.PO | POOrderS         | set_IsOpenTaxValid(Nullable<Boolean>)                      |
| PX.Objects.TX | TaxBaseAttribute | CalcDocTotals(PXCache, Object, Decimal, Decimal, Decimal)  |
| PX.Objects.TX | TaxBaseAttribute | _CalcDocTotals(PXCache, Object, Decimal, Decimal, Decimal) |
| PX.Objects.TX | TaxZoneMaint     | TaxZone_RowPersisting(PXCache, PXRowPersistingEventArgs)   |
| PX.Objects.SO | SOInvoice        | get_CuryTaxTotal()   |
| PX.Objects.SO | SOInvoice        | set_CuryTaxTotal(Nullable<Decimal>)                        |
| PX.Objects.SO | SOInvoice        | get_TaxTotal()   |
| PX.Objects.SO | SOInvoice        | set_TaxTotal(Nullable<Decimal>)                            |
| PX.Objects.SO | SOInvoice        | get_CuryLineTotal()  |
| PX.Objects.SO | SOInvoice        | set_CuryLineTotal(Nullable<Decimal>)                       |
| PX.Objects.SO | SOInvoice        | get_LineTotal()  |

| Namespace     | Simple Name | Name   |
|---------------|-------------|--|
| PX.Objects.SO | SOInvoice   | set_LineTotal(Nullable<Decimal>)             |
| PX.Objects.SO | SOInvoice   | get_CuryPremiumFreightAmt()                  |
| PX.Objects.SO | SOInvoice   | set_CuryPremiumFreightAmt(Nullable<Decimal>) |
| PX.Objects.SO | SOInvoice   | get_PremiumFreightAmt()                      |
| PX.Objects.SO | SOInvoice   | set_PremiumFreightAmt(Nullable<Decimal>)     |
| PX.Objects.SO | SOInvoice   | get_CuryFreightCost()                        |
| PX.Objects.SO | SOInvoice   | set_CuryFreightCost(Nullable<Decimal>)       |
| PX.Objects.SO | SOInvoice   | get_FreightCost()                            |
| PX.Objects.SO | SOInvoice   | set_FreightCost(Nullable<Decimal>)           |
| PX.Objects.SO | SOInvoice   | get_CuryFreightAmt()                         |
| PX.Objects.SO | SOInvoice   | set_CuryFreightAmt(Nullable<Decimal>)        |
| PX.Objects.SO | SOInvoice   | get_FreightAmt()                             |
| PX.Objects.SO | SOInvoice   | set_FreightAmt(Nullable<Decimal>)            |
| PX.Objects.SO | SOInvoice   | get_CuryFreightTot()                         |
| PX.Objects.SO | SOInvoice   | set_CuryFreightTot(Nullable<Decimal>)        |
| PX.Objects.SO | SOInvoice   | get_FreightTot()                             |
| PX.Objects.SO | SOInvoice   | set_FreightTot(Nullable<Decimal>)            |
| PX.Objects.SO | SOInvoice   | get_CuryMiscTot()                            |
| PX.Objects.SO | SOInvoice   | set_CuryMiscTot(Nullable<Decimal>)           |

| Namespace     | Simple Name           | Name                                 |
|---------------|-----------------------|--------------------------------------|
| PX.Objects.SO | SOInvoice             | get_MiscTot()                        |
| PX.Objects.SO | SOInvoice             | set_MiscTot(Nullable<Decimal>)       |
| PX.Objects.SO | SOInvoice             | get_CuryDiscTot()                    |
| PX.Objects.SO | SOInvoice             | set_CuryDiscTot(Nullable<Decimal>)   |
| PX.Objects.SO | SOInvoice             | get_DiscTot()                        |
| PX.Objects.SO | SOInvoice             | set_DiscTot(Nullable<Decimal>)       |
| PX.Objects.SO | SOOrderDiscountDetail | set_LineNbr(Nullable<Int32>)         |
| PX.Objects.SO | SOSetup               | get_PromoLineDisc()                  |
| PX.Objects.SO | SOSetup               | set_PromoLineDisc(Nullable<Boolean>) |
| PX.Objects.SO | SOSetup               | get_PromoDocDisc()                   |
| PX.Objects.SO | SOSetup               | set_PromoDocDisc(Nullable<Boolean>)  |
| PX.Objects.SO | SOShipLine            | get_DetDiscIDC1()                    |
| PX.Objects.SO | SOShipLine            | set_DetDiscIDC1(String)              |
| PX.Objects.SO | SOShipLine            | get_DetDiscSeqIDC1()                 |
| PX.Objects.SO | SOShipLine            | set_DetDiscSeqIDC1(String)           |
| PX.Objects.SO | SOShipLine            | get_DetDiscIDC2()                    |
| PX.Objects.SO | SOShipLine            | set_DetDiscIDC2(String)              |
| PX.Objects.SO | SOShipLine            | get_DetDiscSeqIDC2()                 |
| PX.Objects.SO | SOShipLine            | set_DetDiscSeqIDC2(String)           |

| Namespace     | Simple Name | Name                               |
|---------------|-------------|------------------------------------|
| PX.Objects.SO | SOShipLine  | get_DetDiscApp()                   |
| PX.Objects.SO | SOShipLine  | set_DetDiscApp(Nullable<Boolean>)  |
| PX.Objects.SO | SOShipLine  | get_PromoDiscID()                  |
| PX.Objects.SO | SOShipLine  | set_PromoDiscID(String)            |
| PX.Objects.SO | SOShipLine  | get_DocDiscIDC1()                  |
| PX.Objects.SO | SOShipLine  | set_DocDiscIDC1(String)            |
| PX.Objects.SO | SOShipLine  | get_DocDiscSeqIDC1()               |
| PX.Objects.SO | SOShipLine  | set_DocDiscSeqIDC1(String)         |
| PX.Objects.SO | SOShipLine  | get_DocDiscIDC2()                  |
| PX.Objects.SO | SOShipLine  | set_DocDiscIDC2(String)            |
| PX.Objects.SO | SOShipLine  | get_DocDiscSeqIDC2()               |
| PX.Objects.SO | SOShipLine  | set_DocDiscSeqIDC2(String)         |
| PX.Objects.SO | SOShipLine  | get_CuryExtPrice()                 |
| PX.Objects.SO | SOShipLine  | get_CuryLineAmt()                  |
| PX.Objects.SO | SOShipLine  | set_CuryLineAmt(Nullable<Decimal>) |
| PX.Objects.SO | SOShipLine  | get_CuryDiscAmt()                  |
| PX.Objects.SO | SOShipLine  | set_CuryDiscAmt(Nullable<Decimal>) |
| PX.Objects.SO | SOShipLine  | get_CuryUnitPrice()                |
| PX.Objects.SO | SOShipLine  | get_CuryInfoID()                   |



| Namespace     | Simple Name              | Name                              |
|---------------|--------------------------|-----------------------------------|
| PX.Objects.SO | SOShipmentDiscountDetail | set_LineNbr(Nullable<Int32>)      |
| PX.Objects.SO | SOLine                   | get_DetDiscIDC1()                 |
| PX.Objects.SO | SOLine                   | set_DetDiscIDC1(String)           |
| PX.Objects.SO | SOLine                   | get_DetDiscSeqIDC1()              |
| PX.Objects.SO | SOLine                   | set_DetDiscSeqIDC1(String)        |
| PX.Objects.SO | SOLine                   | get_DetDiscIDC2()                 |
| PX.Objects.SO | SOLine                   | set_DetDiscIDC2(String)           |
| PX.Objects.SO | SOLine                   | get_DetDiscSeqIDC2()              |
| PX.Objects.SO | SOLine                   | set_DetDiscSeqIDC2(String)        |
| PX.Objects.SO | SOLine                   | get_DetDiscApp()                  |
| PX.Objects.SO | SOLine                   | set_DetDiscApp(Nullable<Boolean>) |
| PX.Objects.SO | SOLine                   | get_PromoDiscID()                 |
| PX.Objects.SO | SOLine                   | set_PromoDiscID(String)           |
| PX.Objects.SO | SOLine                   | get_DocDiscIDC1()                 |
| PX.Objects.SO | SOLine                   | set_DocDiscIDC1(String)           |
| PX.Objects.SO | SOLine                   | get_DocDiscSeqIDC1()              |
| PX.Objects.SO | SOLine                   | set_DocDiscSeqIDC1(String)        |
| PX.Objects.SO | SOLine                   | get_DocDiscIDC2()                 |

| Namespace     | Simple Name            | Name   |
|---------------|------------------------|--|
| PX.Objects.SO | SOLine                 | set_DocDiscIDC2(String)  |
| PX.Objects.SO | SOLine                 | get_DocDiscSeqIDC2()   |
| PX.Objects.SO | SOLine                 | set_DocDiscSeqIDC2(String)   |
| PX.Objects.SO | FreightCalculator      | CalcFreight<T,CuryFreightCostField,CuryFreightField> (PXCache,T,Nullable<Int32>) |
| PX.Objects.SO | FreightCalculator      | ApplyFreightTerms<T,CuryFreightField>(PXCache,T, Nullable<Int32>)                |
| PX.Objects.SO | SOUnbilledTaxAttribute | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal)                            |
| PX.Objects.SO | SOOpenTaxAttribute     | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal)                            |
| PX.Objects.SO | SOOrderTaxAttribute    | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal)                            |
| PX.Objects.SO | SOTaxAttribute         | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal)                            |
| PX.Objects.SO | SOInvoiceTaxAttribute  | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal)                            |
| PX.Objects.SO | SOOpenPeriodAttribute  | IsValidPeriod(PXCache,Object,Object)   |
| PX.Objects.SO | SOFinPeriodAttribute   | IsValidPeriod(PXCache,Object,Object)   |
| PX.Objects.SO | SOInvoiceEntry         | SOInvoice_CuryDiscTot_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)             |
| PX.Objects.SO | SOInvoiceEntry         | SOInvoiceDiscountDetail_RowSelected(PXCache, PXRowSelectedEventArgs)             |
| PX.Objects.SO | SOInvoiceEntry         | AddDiscountDetails(PXCache,PXRowUpdatedEventArgs)                                |
| PX.Objects.SO | SOInvoiceEntry         | CollectGroupDiscountToLineCorrelation(SOOrder)                                   |
| PX.Objects.SO | SOInvoiceEntry         | AddFreightTransaction(SOFreightDetail)   |
| PX.Objects.SO | SOInvoiceEntry         | ApplyAvalaraTax(ARInvoice,GetTaxResult)  |
| PX.Objects.SO | SOInvoiceEntry         | GetDocDiscount()   |

| Namespace     | Simple Name  | Name  |
|---------------|--------------|---|
| PX.Objects.SO | SOOrderEntry | RecalcAvalara(PXAdapter)  |
| PX.Objects.SO | SOOrderEntry | SOShippingAddress_RowUpdated(PXCache,PXRowUpdatedEventArgs)                         |
| PX.Objects.SO | SOOrderEntry | SOShippingAddress_RowInserted(PXCache,PXRowInsertedEventArgs)                       |
| PX.Objects.SO | SOOrderEntry | SOShippingAddress_RowDeleted(PXCache, PXRowDeletedEventArgs)                        |
| PX.Objects.SO | SOOrderEntry | SOShippingAddress_OverrideAddress_FieldUpdating (PXCache, PXFieldUpdatingEventArgs) |
| PX.Objects.SO | SOOrderEntry | get_IsExternalTax()   |
| PX.Objects.SO | SOOrderEntry | CalculateAvalaraTax(SOOrder)  |
| PX.Objects.SO | SOOrderEntry | CalculateAvalaraTax(SOOrder,Boolean)  |
| PX.Objects.SO | SOOrderEntry | BuildGetTaxRequest(SOOrder)   |
| PX.Objects.SO | SOOrderEntry | BuildGetTaxRequestOpen(SOOrder)   |
| PX.Objects.SO | SOOrderEntry | BuildGetTaxRequestUnbilled(SOOrder)   |
| PX.Objects.SO | SOOrderEntry | BuildGetTaxRequestFreight(SOOrder)  |
| PX.Objects.SO | SOOrderEntry | ApplyAvalaraTax(SOOrder,GetTaxResult,GetTaxResult, GetTaxResult,GetTaxResult)       |
| PX.Objects.SO | SOOrderEntry | LogMessages(BaseResult)   |
| PX.Objects.SO | SOOrderEntry | GetFromAddress(SOOrder)   |
| PX.Objects.SO | SOOrderEntry | GetFromAddress(SOOrder,SOLine)  |
| PX.Objects.SO | SOOrderEntry | GetToAddress(SOOrder)   |
| PX.Objects.SO | SOOrderEntry | GetToAddress(SOOrder,SOLine)  |
| PX.Objects.SO | SOOrderEntry | GetAvalaraLocationCode(SOOrder)   |

| Namespace     | Simple Name     | Name   |
|---------------|-----------------|--|
| PX.Objects.SO | SOOrderEntry    | IsSame(GetTaxRequest,GetTaxRequest)            |
| PX.Objects.SO | SOOrderEntry    | RecalculateAvalaraTaxes()                      |
| PX.Objects.SO | POLine3         | get_Completed()                                |
| PX.Objects.SO | POLine3         | set_Completed(Nullable<Boolean>)               |
| PX.Objects.SO | SOShipmentEntry | CollectGroupDiscountToLineCorrelation(SOOrder) |
| PX.Objects.SO | SOMiscLine2     | get_DetDiscIDC1()                              |
| PX.Objects.SO | SOMiscLine2     | set_DetDiscIDC1(String)                        |
| PX.Objects.SO | SOMiscLine2     | get_DetDiscSeqIDC1()                           |
| PX.Objects.SO | SOMiscLine2     | set_DetDiscSeqIDC1(String)                     |
| PX.Objects.SO | SOMiscLine2     | get_DetDiscIDC2()                              |
| PX.Objects.SO | SOMiscLine2     | set_DetDiscIDC2(String)                        |
| PX.Objects.SO | SOMiscLine2     | get_DetDiscSeqIDC2()                           |
| PX.Objects.SO | SOMiscLine2     | set_DetDiscSeqIDC2(String)                     |
| PX.Objects.SO | SOMiscLine2     | get_DetDiscApp()                               |
| PX.Objects.SO | SOMiscLine2     | set_DetDiscApp(Nullable<Boolean>)              |
| PX.Objects.SO | SOMiscLine2     | get_DocDiscIDC1()                              |
| PX.Objects.SO | SOMiscLine2     | set_DocDiscIDC1(String)                        |
| PX.Objects.SO | SOMiscLine2     | get_DocDiscSeqIDC1()                           |
| PX.Objects.SO | SOMiscLine2     | set_DocDiscSeqIDC1(String)                     |

| Namespace                           | Simple Name           | Name                                     |
|-------------------------------------|-----------------------|--|
| PX.Objects.SO                       | SOMiscLine2           | get_DocDiscIDC2()                        |
| PX.Objects.SO                       | SOMiscLine2           | set_DocDiscIDC2(String)                  |
| PX.Objects.SO                       | SOMiscLine2           | get_DocDiscSeqIDC2()                     |
| PX.Objects.SO                       | SOMiscLine2           | set_DocDiscSeqIDC2(String)               |
| PX.Objects.IN                       | INOpenPeriodAttribute | .ctor(Type)                              |
| PX.Objects.IN                       | INOpenPeriodAttribute | IsValidPeriod(PXCache, Object, Object)   |
| PX.Objects.Extensions.Discount      | Discount              | set_LineNbr(Nullable<Int32>)             |
| PX.Objects.Extensions.MultiCurrency | CurySource            | get_CuryID()                             |
| PX.Objects.Extensions.MultiCurrency | CurySource            | set_CuryID(String)                       |
| PX.Objects.Extensions.MultiCurrency | CurySource            | get_CuryRateTypeID()                     |
| PX.Objects.Extensions.MultiCurrency | CurySource            | set_CuryRateTypeID(String)               |
| PX.Objects.Extensions.MultiCurrency | CurySource            | get_AllowOverrideCury()                  |
| PX.Objects.Extensions.MultiCurrency | CurySource            | set_AllowOverrideCury(Nullable<Boolean>) |
| PX.Objects.Extensions.MultiCurrency | CurySource            | get_AllowOverrideRate()                  |

| Namespace                           | Simple Name           | Name   |
|-------------------------------------|-----------------------|--|
| PX.Objects.Extensions.MultiCurrency | CurySource            | set_AllowOverrideRate(Nullable<Boolean>)   |
| PX.Objects.Extensions.MultiCurrency | Document              | get_BAccountID()   |
| PX.Objects.Extensions.MultiCurrency | Document              | set_BAccountID(Nullable<Int32>)  |
| PX.Objects.Extensions.MultiCurrency | Document              | get_CuryID()   |
| PX.Objects.Extensions.MultiCurrency | Document              | set_CuryID(String)   |
| PX.Objects.Extensions.MultiCurrency | Document              | get_CuryInfoID()   |
| PX.Objects.Extensions.MultiCurrency | Document              | set_CuryInfoID(Nullable<Int64>)  |
| PX.Objects.Extensions.MultiCurrency | Document              | get_DocumentDate()   |
| PX.Objects.Extensions.MultiCurrency | Document              | set_DocumentDate(Nullable<DateTime>)   |
| PX.Objects.FA                       | FAOpenPeriodAttribute | .ctor(Type)  |
| PX.Objects.FA                       | FAOpenPeriodAttribute | IsValidPeriod(PXCache, Object, Object)   |
| PX.Objects.DR                       | TransactionsGenerator | .ctor(PXGraph, DRDeferredCode, IFinancialPeriodProvider, Func<Decimal, Decimal>) |
| PX.Objects.DR                       | TransactionsGenerator | GenerateTransactions(DRSchedule, DRScheduleDetail, Nullable<Int32>)              |
| PX.Objects.DR                       | TransactionsGenerator | CalcOccurrences(DateTime, DateTime)  |

| Namespace     | Simple Name                    | Name  |
|---------------|--------------------------------|---|
| PX.Objects.DR | TransactionsGenerator          | GetRecognitionDate(String,DateTime,Nullable<DateTime>)  |
| PX.Objects.DR | DRProcess                      | RunRecognition(SortedList<String, DRRRecognition+DRBatch>,Nullable<DateTime>)                   |
| PX.Objects.DR | DRProcess                      | RunIntegrityCheck(DRBalanceValidation+DRBalanceType)  |
| PX.Objects.DR | DRProcess                      | GenerateAndAddDeferralTransactions(DRSchedule,DRScheduleDetail,DRDeferredCode, Nullable<Int32>) |
| PX.Objects.DR | ScheduleMaint                  | RebuildProjections(Nullable<Int32>)   |
| PX.Objects.DR | DRBatch                        | .ctor(String,Nullable<Int32>,Nullable<Int32>, Nullable<Int32>)                                  |
| PX.Objects.GL | TranDateOutOfRangeException    | .ctor(String)   |
| PX.Objects.GL | FiscalPeriodClosedException    | .ctor(String)   |
| PX.Objects.GL | FiscalPeriodClosedException    | .ctor(String,PXErrorLevel,String)   |
| PX.Objects.GL | FiscalPeriodInactiveException  | .ctor(String)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | GetPeriod(PXCache,Type,DateTime,Boolean)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | GetPeriod(PXCache,Type,DateTime,Object[],Boolean)   |
| PX.Objects.GL | PeriodIDAttribute              | OffsetPeriod(PXGraph,String,Int32,Int32)  |
| PX.Objects.GL | PeriodIDAttribute              | Min(String,String)  |
| PX.Objects.GL | PeriodIDAttribute              | Max(String,String)  |
| PX.Objects.GL | PeriodIDAttribute              | Max(DateTime,DateTime)  |

| Namespace     | Simple Name          | Name  |
|---------------|----------------------|---|
| PX.Objects.GL | FinPeriodIDAttribute | FindMaxFinPeriodWithEndDataBelongToInterval(PXGraph,Nullable<DateTime>, Nullable<DateTime>) |
| PX.Objects.GL | FinPeriodIDAttribute | PeriodFromDate(PXGraph,Nullable<DateTime>)  |
| PX.Objects.GL | FinPeriodIDAttribute | GetFinPeriodByDate(PXGraph,Nullable<DateTime>)  |
| PX.Objects.GL | FinPeriodIDAttribute | FindFinPeriodByDate(PXGraph,Nullable<DateTime>)   |
| PX.Objects.GL | FinPeriodIDAttribute | GetOffsetPeriodId(PXGraph,String,Int32)   |
| PX.Objects.GL | FinPeriodIDAttribute | FindOffsetPeriodId(PXGraph,String,Int32)  |
| PX.Objects.GL | FinPeriodIDAttribute | NextPeriod(PXGraph,String)  |
| PX.Objects.GL | FinPeriodIDAttribute | PeriodStartDate(PXGraph,String)   |
| PX.Objects.GL | FinPeriodIDAttribute | PeriodEndDate(PXGraph,String)   |
| PX.Objects.GL | FinPeriodIDAttribute | GetFinPeriodsInInterval(PXGraph,Nullable<DateTime>, Nullable<DateTime>)                     |
| PX.Objects.GL | FinPeriodIDAttribute | GetAdjustmentFinPeriods(PXGraph,String)   |
| PX.Objects.GL | FinPeriodIDAttribute | FindLastYearNotAdjustmentPeriod(PXGraph,String)   |
| PX.Objects.GL | FinPeriodIDAttribute | FindLastFinancialPeriodOfYear(PXGraph,String)   |
| PX.Objects.GL | FinPeriodIDAttribute | PeriodsBetweenInclusive(PXGraph,DateTime,DateTime)  |
| PX.Objects.GL | FinPeriodIDAttribute | CheckIsDateWithinPeriod(PXGraph,String,DateTime,String)                                     |
| PX.Objects.GL | FinPeriodIDAttribute | IsDateWithinPeriod(PXGraph,String,DateTime)   |
| PX.Objects.GL | FinPeriodIDAttribute | GetFirstFinPeriodIDOfYear(String)   |
| PX.Objects.GL | FinPeriodIDAttribute | GetNextYearID(String)   |
| PX.Objects.GL | FinPeriodIDAttribute | GetPreviousYearID(String)   |



| Namespace     | Simple Name                | Name   |
|---------------|----------------------------|--|
| PX.Objects.GL | FinPeriodIDAttribute       | PeriodExists(PXGraph,String)                           |
| PX.Objects.GL | FinPeriodIDAttribute       | GetSamePeriodInPreviousYear(PXGraph,String)            |
| PX.Objects.GL | FinPeriodIDAttribute       | GetByID(PXGraph,String)                                |
| PX.Objects.GL | FinPeriodIDAttribute       | FindFinPeriodWithStartDate(PXGraph,Nullable<DateTime>) |
| PX.Objects.GL | FinPeriodIDAttribute       | FindFinPeriodWithEndDate(PXGraph,Nullable<DateTime>)   |
| PX.Objects.GL | TranPeriodIDAttribute      | CacheAttached(PXCache)                                 |
| PX.Objects.GL | FinPeriodSelectorAttribute | .ctor(Type,Type[])                                     |
| PX.Objects.GL | FinPeriodSelectorAttribute | .ctor(Type,Type,Type[])                                |
| PX.Objects.GL | OpenPeriodAttribute        | get_RaiseErrorOnInactivePeriod()                       |
| PX.Objects.GL | OpenPeriodAttribute        | set_RaiseErrorOnInactivePeriod(Boolean)                |
| PX.Objects.GL | OpenPeriodAttribute        | .ctor(Type,Type)                                       |
| PX.Objects.GL | OpenPeriodAttribute        | PostClosedPeriods(PXGraph)                             |
| PX.Objects.GL | BranchBaseAttribute        | .ctor(Type,Boolean)                                    |
| PX.Objects.GL | BranchBaseAttribute        | .ctor(Type,Type)                                       |
| PX.Objects.GL | BranchBaseAttribute        | .ctor()  |
| PX.Objects.GL | GLTaxAttribute             | CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal)  |
| PX.Objects.GL | AccountHistory             | get_FinPeriodID()                                      |
| PX.Objects.GL | AccountHistory             | set_FinPeriodID(String)                                |

| Namespace                         | Simple Name            | Name  |
|-----------------------------------|------------------------|---|
| PX.Objects.GL                     | BudgetFilter           | get_RepLedgerID()   |
| PX.Objects.GL                     | BudgetFilter           | set_RepLedgerID(Nullable<Int32>)  |
| PX.Objects.GL                     | BudgetFilter           | get_RepFinYear()  |
| PX.Objects.GL                     | BudgetFilter           | set_RepFinYear(Nullable<DateTime>)  |
| PX.Objects.GL                     | Scheduler              | .ctor(PXGraph,IFinancialPeriodProvider)   |
| PX.Objects.GL                     | GLHistoryValidate      | GLIntegrityCheckFilter_FinPeriodID_FieldVerifying (PXCache,PXFieldVerifyingEventArgs) |
| PX.Objects.GL                     | AccountHistoryBySubEnq | GLHistoryEnqFilter_FinPeriodID_CacheAttached (PXCache)                                |
| PX.Objects.GL                     | AccountHistoryEnq      | GLHistoryEnqFilter_FinPeriodID_CacheAttached (PXCache)                                |
| PX.Objects.GL                     | AllocationProcess      | ValidateFinPeriod(String)   |
| PX.Objects.GL                     | BaseGLHistory          | get_FinPeriodID()   |
| PX.Objects.GL                     | BaseGLHistory          | set_FinPeriodID(String)   |
| PX.Objects.GL                     | PostGraph              | IntegrityCheckProc(Ledger)  |
| PX.Objects.GL                     | IPeriod                | get_Closed()  |
| PX.Objects.GL                     | IPeriod                | set_Closed(Nullable<Boolean>)   |
| PX.Objects.GL.Overrides.PostGraph | AHAccumAttribute       | PreviousPeriod(String)  |
| PX.Objects.GL.Overrides.PostGraph | AcctHist               | get_FinPeriodID()   |
| PX.Objects.GL.Overrides.PostGraph | AcctHist               | set_FinPeriodID(String)   |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.EP | ActivityService       | CreateActivity(Object,String,Nullable<Guid>)   |
| PX.Objects.EP | EmployeeCostEngine    | GetEmployeeRate(Nullable<Int32>,Nullable<Int32>, Nullable<Int32>,Nullable<DateTime>) |
| PX.Objects.EP | EmployeeCostEngine    | GetEmployeeRate(Nullable<Int32>,Nullable<DateTime>)                                  |
| PX.Objects.EP | EmployeeCostEngine    | CalculateEmployeeCost(PMTimeActivity,Nullable<Int32>, DateTime)                      |
| PX.Objects.EP | EmployeeCostEngine    | GetOvertimeMultiplier(String,Int32,DateTime)   |
| PX.Objects.EP | ActivitiesEnq         | CreateNew(PXAdapter)   |
| PX.Objects.EP | ActivitiesEnq         | viewActivity()   |
| PX.Objects.EP | TimeCardMaint         | FindDuplicate(EPTimeCardSummary)   |
| PX.Objects.EP | EPExpenseClaimDetails | get_ClaimDetailCD()  |
| PX.Objects.EP | EPSetup               | get_PostToOffBalance()   |
| PX.Objects.EP | EPSetup               | set_PostToOffBalance(Nullable<Boolean>)  |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_RowSelected(PXCache, PXRowSelectedEventArgs)                          |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_RowDeleting(PXCache, PXRowDeletingEventArgs)                          |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_EffectiveDate_FieldDefaulting(PXCache, PXFieldDefaultingEventArgs)    |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_EffectiveDate_FieldVerifying(PXCache, PXFieldVerifyingEventArgs)      |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_AnnualSalary_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)           |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_RegularHours_FieldUpdated(PXCache, PXFieldUpdatedEventArgs)           |
| PX.Objects.EP | EmployeeMaint         | ChangeHourlyRate(EPEmployeeRate)   |
| PX.Objects.EP | EmployeeMaint         | EPEmployeeRate_RowPersisting(PXCache, PXRowPersistingEventArgs)                      |

| Namespace     | Simple Name      | Name  |
|---------------|------------------|---|
| PX.Objects.EP | EmployeeMaint    | EPEmployeeRateByProject_RowInserting(PXCache, PXRowInsertingEventArgs)              |
| PX.Objects.EP | EmployeeMaint    | GetNextEffectiveDate(EPEmployeeRate)  |
| PX.Objects.EP | EmployeeMaint    | GetFirstEffectiveDate(EPEmployeeRate)   |
| PX.Objects.CT | ContractTemplate | get_IsTemplate()  |
| PX.Objects.CT | ContractTemplate | set_IsTemplate(Nullable<Boolean>)   |
| PX.Objects.CT | TemplateMaint    | CSAttributeGroup_EntityClassID_FieldDefaulting (PXCache,PXFieldDefaultingEventArgs) |
| PX.Objects.CT | Contract         | get_BaseType()  |
| PX.Objects.CT | Contract         | set_BaseType(String)  |
| PX.Objects.CS | Country          | get_AddressVerificationTypeName()   |
| PX.Objects.CS | Country          | set_AddressVerificationTypeName(String)   |
| PX.Objects.CR | CRQuote          | get_RevisionID()  |
| PX.Objects.CR | CRQuote          | get_DefRevisionID()   |
| PX.Objects.CR | CRQuote          | set_DefRevisionID(Nullable<Int32>)  |
| PX.Objects.CR | CRQuote          | get_RevisionOpportunityID()   |
| PX.Objects.CR | CRQuote          | set_RevisionOpportunityID(String)   |
| PX.Objects.CR | CRQuote          | get_RevisionRevisionID()  |
| PX.Objects.CR | CRQuote          | set_RevisionRevisionID(Nullable<Int32>)   |
| PX.Objects.CR | QuoteMaint       | CRQuote_RevisionID_FieldDefaulting(PXCache, PXFieldDefaultingEventArgs)             |
| PX.Objects.CR | QuoteMaint       | CROpportunityProducts_OpportunityID_CacheAttached (PXCache)                         |

| Namespace     | Simple Name         | Name   |
|---------------|---------------------|--|
| PX.Objects.CR | QuoteMaint          | CRopportunityProducts_RevisionID_CacheAttached (PXCache)           |
| PX.Objects.CR | QuoteMaint          | CRopportunityProducts_RowInserted(PXCache, PXRowInsertedEventArgs) |
| PX.Objects.CR | QuoteMaint          | CRopportunityProducts_RowDeleted(PXCache, PXRowDeletedEventArgs)   |
| PX.Objects.CR | QuoteMaint          | CRopportunityProducts_RowUpdated(PXCache, PXRowUpdatedEventArgs)   |
| PX.Objects.CR | QuoteMaint          | CRopportunityDiscountDetail_OpportunityID_CacheAttached(PXCache)   |
| PX.Objects.CR | QuoteMaint          | CRopportunityDiscountDetail_RevisionID_CacheAttached(PXCache)      |
| PX.Objects.CR | QuoteMaint          | CRopportunityTax_OpportunityID_CacheAttached (PXCache)             |
| PX.Objects.CR | QuoteMaint          | CRopportunityTax_RevisionID_CacheAttached(PXCache)                 |
| PX.Objects.CR | QuoteMaint          | CRTaxTran_OpportunityID_CacheAttached(PXCache)                     |
| PX.Objects.CR | QuoteMaint          | CRTaxTran_RevisionID_CacheAttached(PXCache)                        |
| PX.Objects.CR | QuoteMaint          | get_IsExternalTax()  |
| PX.Objects.CR | QuoteMaint          | get_SkipAvalaraTaxProcessing()                                     |
| PX.Objects.CR | QuoteMaint          | set_SkipAvalaraTaxProcessing(Boolean)                              |
| PX.Objects.CR | QuoteMaint          | ClearTaxes(CRQuote)  |
| PX.Objects.CR | Discount            | Discount_RowUpdated(PXCache, PXRowUpdatedEventArgs)                |
| PX.Objects.CR | Discount            | Discount_RowDeleted(PXCache, PXRowDeletedEventArgs)                |
| PX.Objects.CR | Discount            | Discount_RowInserted(PXCache, PXRowInsertedEventArgs)              |
| PX.Objects.CR | CEmailActivityMaint | delete(PXAdapter)  |

| Namespace     | Simple Name                     | Name                               |
|---------------|---------------------------------|------------------------------------|
| PX.Objects.CR | CROpportunityDiscount<br>Detail | get_OpportunityID()                |
| PX.Objects.CR | CROpportunityDiscount<br>Detail | set_OpportunityID(String)          |
| PX.Objects.CR | CROpportunityDiscount<br>Detail | get_RevisionID()                   |
| PX.Objects.CR | CROpportunityDiscount<br>Detail | set_RevisionID(Nullable<Int32>)    |
| PX.Objects.CR | CROpportunityDiscount<br>Detail | set_LineNbr(Nullable<Int32>)       |
| PX.Objects.CR | CRTaskMaint                     | delete()                           |
| PX.Objects.CR | CRMarketingList                 | get_NoFax()                        |
| PX.Objects.CR | CRMarketingList                 | set_NoFax(Nullable<Boolean>)       |
| PX.Objects.CR | CRMarketingList                 | get_NoMail()                       |
| PX.Objects.CR | CRMarketingList                 | set_NoMail(Nullable<Boolean>)      |
| PX.Objects.CR | CRMarketingList                 | get_NoMarketing()                  |
| PX.Objects.CR | CRMarketingList                 | set_NoMarketing(Nullable<Boolean>) |
| PX.Objects.CR | CRMarketingList                 | get_NoCall()                       |
| PX.Objects.CR | CRMarketingList                 | set_NoCall(Nullable<Boolean>)      |
| PX.Objects.CR | CRMarketingList                 | get_NoEMail()                      |
| PX.Objects.CR | CRMarketingList                 | set_NoEMail(Nullable<Boolean>)     |

| Namespace     | Simple Name            | Name                              |
|---------------|------------------------|-----------------------------------|
| PX.Objects.CR | CRMarketingList        | get_NoMassMail()                  |
| PX.Objects.CR | CRMarketingList        | set_NoMassMail(Nullable<Boolean>) |
| PX.Objects.CR | CROppportunityProducts | get_OppportunityID()              |
| PX.Objects.CR | CROppportunityProducts | set_OppportunityID(String)        |
| PX.Objects.CR | CROppportunityProducts | get_RevisionID()                  |
| PX.Objects.CR | CROppportunityProducts | set_RevisionID(Nullable<Int32>)   |
| PX.Objects.CR | CROppportunityProducts | get_Quantity()                    |
| PX.Objects.CR | CROppportunityProducts | set_Quantity(Nullable<Decimal>)   |
| PX.Objects.CR | CROppportunityProducts | get_DetDiscIDC1()                 |
| PX.Objects.CR | CROppportunityProducts | set_DetDiscIDC1(String)           |
| PX.Objects.CR | CROppportunityProducts | get_DetDiscSeqIDC1()              |
| PX.Objects.CR | CROppportunityProducts | set_DetDiscSeqIDC1(String)        |
| PX.Objects.CR | CROppportunityProducts | get_DetDiscIDC2()                 |
| PX.Objects.CR | CROppportunityProducts | set_DetDiscIDC2(String)           |
| PX.Objects.CR | CROppportunityProducts | get_DetDiscSeqIDC2()              |
| PX.Objects.CR | CROppportunityProducts | set_DetDiscSeqIDC2(String)        |
| PX.Objects.CR | CROppportunityProducts | get_DetDiscApp()                  |
| PX.Objects.CR | CROppportunityProducts | set_DetDiscApp(Nullable<Boolean>) |
| PX.Objects.CR | CROppportunityProducts | get_PromoDiscID()                 |

| Namespace     | Simple Name           | Name                               |
|---------------|-----------------------|------------------------------------|
| PX.Objects.CR | CROpportunityProducts | set_PromoDiscID(String)            |
| PX.Objects.CR | CROpportunityProducts | get_DocDiscIDC1()                  |
| PX.Objects.CR | CROpportunityProducts | set_DocDiscIDC1(String)            |
| PX.Objects.CR | CROpportunityProducts | get_DocDiscSeqIDC1()               |
| PX.Objects.CR | CROpportunityProducts | set_DocDiscSeqIDC1(String)         |
| PX.Objects.CR | CROpportunityProducts | get_DocDiscIDC2()                  |
| PX.Objects.CR | CROpportunityProducts | set_DocDiscIDC2(String)            |
| PX.Objects.CR | CROpportunityProducts | get_DocDiscSeqIDC2()               |
| PX.Objects.CR | CROpportunityProducts | set_DocDiscSeqIDC2(String)         |
| PX.Objects.CR | CROpportunityProducts | get_CuryLineAmt()                  |
| PX.Objects.CR | CROpportunityProducts | set_CuryLineAmt(Nullable<Decimal>) |
| PX.Objects.CR | CROpportunityTax      | get_OpportunityID()                |
| PX.Objects.CR | CROpportunityTax      | set_OpportunityID(String)          |
| PX.Objects.CR | CROpportunityTax      | get_RevisionID()                   |
| PX.Objects.CR | CROpportunityTax      | set_RevisionID(Nullable<Int32>)    |
| PX.Objects.CR | CRTaxTran             | get_OpportunityID()                |
| PX.Objects.CR | CRTaxTran             | set_OpportunityID(String)          |
| PX.Objects.CR | CRTaxTran             | get_RevisionID()                   |
| PX.Objects.CR | CRTaxTran             | set_RevisionID(Nullable<Int32>)    |



| Namespace                | Simple Name      | Name                                  |
|--------------------------|------------------|---------------------------------------|
| PX.Objects.CR            | CRTaxTran        | get_CuryTaxableAmt()                  |
| PX.Objects.CR            | CRTaxTran        | set_CuryTaxableAmt(Nullable<Decimal>) |
| PX.Objects.CR            | CRTaxTran        | get_CuryTaxAmt()                      |
| PX.Objects.CR            | CRTaxTran        | set_CuryTaxAmt(Nullable<Decimal>)     |
| PX.Objects.CR            | CROppportunity   | get_QuoteNoteID()                     |
| PX.Objects.CR            | CROppportunity   | set_QuoteNoteID(Nullable<Guid>)       |
| PX.Objects.CR            | CROppportunity   | get_RevisionCntr()                    |
| PX.Objects.CR            | CROppportunity   | set_RevisionCntr(Nullable<Int32>)     |
| PX.Objects.CR            | CROppportunity   | get_DefRevisionID()                   |
| PX.Objects.CR            | CROppportunity   | set_DefRevisionID(Nullable<Int32>)    |
| PX.Objects.CR            | CROppportunity   | get_RevisionOpportunityID()           |
| PX.Objects.CR            | CROppportunity   | set_RevisionOpportunityID(String)     |
| PX.Objects.CR            | CROppportunity   | get_RevisionID()                      |
| PX.Objects.CR            | CROppportunity   | set_RevisionID(Nullable<Int32>)       |
| PX.Objects.CR            | OpportunityMaint | get_IsExternalTax()                   |
| PX.Objects.CR            | OpportunityMaint | get_SkipAvalaraTaxProcessing()        |
| PX.Objects.CR            | OpportunityMaint | set_SkipAvalaraTaxProcessing(Boolean) |
| PX.Objects.CR            | OpportunityMaint | ClearTaxes(CROppportunity)            |
| PX.Objects.CR.Standalone | CROppportunity   | get_RevisionCntr()                    |

| Namespace                | Simple Name           | Name  |
|--------------------------|-----------------------|---|
| PX.Objects.CR.Standalone | CROpportunity         | set_RevisionCntr(Nullable<Int32>)                             |
| PX.Objects.CR.Standalone | CROpportunity         | get_DefRevisionID()   |
| PX.Objects.CR.Standalone | CROpportunity         | set_DefRevisionID(Nullable<Int32>)                            |
| PX.Objects.CR.Standalone | CROpportunityRevision | get_RevisionID()  |
| PX.Objects.CR.Standalone | CROpportunityRevision | set_RevisionID(Nullable<Int32>)                               |
| PX.Objects.CR.Standalone | CROpportunityRevision | get_PrimaryQuoteNbr()   |
| PX.Objects.CR.Standalone | CROpportunityRevision | set_PrimaryQuoteNbr(String)                                   |
| PX.Objects.CR.Standalone | CRQuote               | get_OpportunityID()   |
| PX.Objects.CR.Standalone | CRQuote               | set_OpportunityID(String)                                     |
| PX.Objects.CR.Standalone | CRQuote               | get_RevisionID()  |
| PX.Objects.CR.Standalone | CRQuote               | set_RevisionID(Nullable<Int32>)                               |
| PX.Objects.CA            | CashFlowFilter        | get_AccountID()   |
| PX.Objects.CA            | CashFlowFilter        | set_AccountID(Nullable<Int32>)                                |
| PX.Objects.CA            | CashTransferEntry     | Clear()   |
| PX.Objects.CA            | CashTransferEntry     | Persist()   |
| PX.Objects.CA            | CashTransferEntry     | CurrencyInfo_RowPersisting(PXCache, PXRowPersistingEventArgs) |
| PX.Objects.CA            | CashTransferEntry     | CATransfer_RowDeleted(PXCache, PXRowDeletedEventArgs)         |
| PX.Objects.CA            | CashTransferEntry     | AddTrxFilter_RowSelected(PXCache, PXRowSelectedEventArgs)     |
| PX.Objects.CA            | CashTransferEntry     | AddTrxFilter_RowInserting(PXCache, PXRowInsertingEventArgs)   |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.CA | CashTransferEntry     | prepareAdd(PXAdapter)                              |
| PX.Objects.CA | CashTransferEntry     | ViewOutBatch(PXAdapter)                            |
| PX.Objects.CA | CashTransferEntry     | ViewInBatch(PXAdapter)                             |
| PX.Objects.CA | CATranEnq             | GetRange(DateTime,String,DateTime&,DateTime&)      |
| PX.Objects.CA | PaymentMethod         | get_APAllowInstances()                             |
| PX.Objects.CA | PaymentMethod         | set_APAllowInstances(Nullable<Boolean>)            |
| PX.Objects.CA | PMInstance            | set_PMInstanceID(Int32)                            |
| PX.Objects.CA | CAOpenPeriodAttribute | .ctor(Type)  |
| PX.Objects.CA | CAOpenPeriodAttribute | IsValidPeriod(PXCache,Object,Object)               |
| PX.Objects.CA | CATranEntry           | CASplit_RowUpdated(PXCache, PXRowUpdatedEventArgs) |
| PX.Objects.CA | CATranEntry           | Persist()  |
| PX.Objects.CA | CATranEntry           | get_IsExternalTax()                                |
| PX.Objects.CA | CATranEntry           | CalculateAvalaraTax(CAAdj)                         |
| PX.Objects.CA | CATranEntry           | BuildGetTaxRequest(CAAdj)                          |
| PX.Objects.CA | CATranEntry           | ApplyAvalaraTax(CAAdj,GetTaxResult)                |
| PX.Objects.CA | CATranEntry           | CancelTax(CAAdj,CancelCode)                        |
| PX.Objects.CA | CATranEntry           | LogMessages(BaseResult)                            |
| PX.Objects.CA | CATranEntry           | GetToAddress(CAAdj)                                |
| PX.Objects.CA | CATranEntry           | GetBranchLocation(CAAdj)                           |

| Namespace               | Simple Name             | Name  |
|-------------------------|-------------------------|---|
| PX.Objects.CA           | CATranEntry             | GetAvalaraLocationCode(CAAAdj)  |
| PX.Objects.CA           | CABalValidate           | cABalValidateList()   |
| PX.Objects.Common       | ProcessingResult        | get_Messages()  |
| PX.Objects.Common       | ProcessingResult        | get_IsSuccess()   |
| PX.Objects.Common       | ProcessingResult        | get_HasWarning()  |
| PX.Objects.Common       | ProcessingResult        | get_HasWarningOrError()   |
| PX.Objects.Common       | ProcessingResult        | get_MaxErrorLevel()   |
| PX.Objects.Common       | ProcessingResult        | get_Success()   |
| PX.Objects.Common       | ProcessingResult        | AddErrorMessage(String,Object[])  |
| PX.Objects.Common       | ProcessingResult        | AddErrorMessage(String)   |
| PX.Objects.Common       | ProcessingResult        | Aggregate(ProcessingResult)   |
| PX.Objects.Common       | ProcessingResult        | RaiselfHasError()   |
| PX.Objects.Common       | ProcessingResult        | GetGeneralMessage()   |
| PX.Objects.Common.Aging | AgingEngine             | GetPeriodAgingBucketDescriptions (IFinancialPeriodProvider,DateTime,AgingDirection,Int32) |
| PX.Objects.Common.Aging | AgingEngine             | AgeByPeriods(PXGraph,DateTime,DateTime, IFinancialPeriodProvider,AgingDirection,Int32)    |
| PX.Objects.AR           | ARInvoiceDiscountDetail | set_LineNbr(Nullable<Int32>)  |
| PX.Objects.AR           | ARExternalTaxCalc       | Process(ARInvoice)  |
| PX.Objects.AR           | ARExternalTaxCalc       | Process(ARCashSale)   |

| Namespace     | Simple Name       | Name                                     |
|---------------|-------------------|--|
| PX.Objects.AR | ARExternalTaxCalc | Process(ARInvoiceEntry)                  |
| PX.Objects.AR | ARExternalTaxCalc | Process(ARCashSaleEntry)                 |
| PX.Objects.AR | ARExternalTaxCalc | Process(List<ARInvoice>,Boolean)         |
| PX.Objects.AR | ARCashSaleEntry   | Persist()                                |
| PX.Objects.AR | ARCashSaleEntry   | get_IsExternalTax()                      |
| PX.Objects.AR | ARCashSaleEntry   | CalculateAvalaraTax(ARCashSale)          |
| PX.Objects.AR | ARCashSaleEntry   | BuildGetTaxRequest(ARCashSale)           |
| PX.Objects.AR | ARCashSaleEntry   | ApplyAvalaraTax(ARCashSale,GetTaxResult) |
| PX.Objects.AR | ARCashSaleEntry   | CancelTax(ARCashSale,CancelCode)         |
| PX.Objects.AR | ARCashSaleEntry   | LogMessages(BaseResult)                  |
| PX.Objects.AR | ARCashSaleEntry   | GetFromAddress(ARCashSale)               |
| PX.Objects.AR | ARCashSaleEntry   | GetToAddress(ARCashSale)                 |
| PX.Objects.AR | ARCashSaleEntry   | GetDocDiscount()                         |
| PX.Objects.AR | ARDataEntryGraph  | SetFlatUnitPrice(PXCache,ARTran)         |
| PX.Objects.AR | ARDataEntryGraph  | GetFlatUnitPrice(PXCache,ARTran)         |
| PX.Objects.AR | ARDataEntryGraph  | SetDiscounts(PXCache,ARTran)             |
| PX.Objects.AR | ARDataEntryGraph  | RecalculateDiscounts(PXCache,ARTran)     |
| PX.Objects.AR | ARDataEntryGraph  | GetAvalaraLocationCode(ARRegister)       |
| PX.Objects.AR | ARDocumentFilter  | get_Period()                             |

| Namespace     | Simple Name          | Name   |
|---------------|----------------------|--|
| PX.Objects.AR | ARDocumentFilter     | set_Period(String)   |
| PX.Objects.AR | ARReleaseProcess     | ReleasePayment(JournalEntry,ARRegister&,PXResult<ARPayment,CurrencyInfo,Currency,Customer, CashAccount>)                 |
| PX.Objects.AR | ARReleaseProcess     | ReleasePayment(JournalEntry,ARRegister&,PXResult<ARPayment,CurrencyInfo,Currency,Customer, CashAccount>,Nullable<Int32>) |
| PX.Objects.AR | ARReleaseProcess     | InsertInvoiceCADepositTransaction(JournalEntry,GLTran,ARReleaseProcess+GLTranInsertionContext)                           |
| PX.Objects.AR | ARPaymentEntry       | CheckValidPeriodForCCTran(PXGraph)   |
| PX.Objects.AR | SPCommissionCalendar | CreateFrom(FinPeriod)  |
| PX.Objects.AR | SPCommissionCalendar | CreateFrom(FinYear)  |
| PX.Objects.AR | ARInvoiceEntry       | ARInvoiceDiscountDetail_DiscountID_CacheAttached (PXCache)   |
| PX.Objects.AR | ARInvoiceEntry       | get_IsExternalTax()  |
| PX.Objects.AR | ARInvoiceEntry       | CalculateAvalaraTax(ARInvoice)   |
| PX.Objects.AR | ARInvoiceEntry       | BuildGetTaxRequest(ARInvoice)  |
| PX.Objects.AR | ARInvoiceEntry       | ApplyAvalaraTax(ARInvoice,GetTaxResult)  |
| PX.Objects.AR | ARInvoiceEntry       | CancelTax(ARInvoice,CancelCode)  |
| PX.Objects.AR | ARInvoiceEntry       | LogMessages(BaseResult)  |
| PX.Objects.AR | ARInvoiceEntry       | GetFromAddress(ARInvoice)  |
| PX.Objects.AR | ARInvoiceEntry       | GetFromAddress(ARInvoice,ARTran)   |
| PX.Objects.AR | ARInvoiceEntry       | GetToAddress(ARInvoice)  |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.AR | ARInvoiceEntry        | GetToAddress(ARInvoice,ARTran)                         |
| PX.Objects.AR | ARInvoiceEntry        | GetDocDiscount()                                       |
| PX.Objects.AR | ARTaxAttribute        | _CalcDocTotals(PXCache,Object,Decimal,Decimal,Decimal) |
| PX.Objects.AR | AROpenPeriodAttribute | .ctor(Type)  |
| PX.Objects.AR | AROpenPeriodAttribute | IsValidPeriod(PXCache,Object,Object)                   |
| PX.Objects.AR | ARRegister            | get_DiscTot()  |
| PX.Objects.AR | ARRegister            | set_DiscTot(Nullable<Decimal>)                         |
| PX.Objects.AR | ARRegister            | get_CuryDiscTot()                                      |
| PX.Objects.AR | ARRegister            | set_CuryDiscTot(Nullable<Decimal>)                     |
| PX.Objects.AR | ARTran                | get_DetDiscIDC1()                                      |
| PX.Objects.AR | ARTran                | set_DetDiscIDC1(String)                                |
| PX.Objects.AR | ARTran                | get_DetDiscSeqIDC1()                                   |
| PX.Objects.AR | ARTran                | set_DetDiscSeqIDC1(String)                             |
| PX.Objects.AR | ARTran                | get_DetDiscIDC2()                                      |
| PX.Objects.AR | ARTran                | set_DetDiscIDC2(String)                                |
| PX.Objects.AR | ARTran                | get_DetDiscSeqIDC2()                                   |
| PX.Objects.AR | ARTran                | set_DetDiscSeqIDC2(String)                             |
| PX.Objects.AR | ARTran                | get_DetDiscApp()                                       |
| PX.Objects.AR | ARTran                | set_DetDiscApp(Nullable<Boolean>)                      |

| Namespace     | Simple Name       | Name  |
|---------------|-------------------|---|
| PX.Objects.AR | ARTran            | get_PromoDiscID()                                       |
| PX.Objects.AR | ARTran            | set_PromoDiscID(String)                                 |
| PX.Objects.AR | ARTran            | get_DocDiscIDC1()                                       |
| PX.Objects.AR | ARTran            | set_DocDiscIDC1(String)                                 |
| PX.Objects.AR | ARTran            | get_DocDiscSeqIDC1()                                    |
| PX.Objects.AR | ARTran            | set_DocDiscSeqIDC1(String)                              |
| PX.Objects.AR | ARTran            | get_DocDiscIDC2()                                       |
| PX.Objects.AR | ARTran            | set_DocDiscIDC2(String)                                 |
| PX.Objects.AR | ARTran            | get_DocDiscSeqIDC2()                                    |
| PX.Objects.AR | ARTran            | set_DocDiscSeqIDC2(String)                              |
| PX.Objects.AR | ARTran            | get_CuryLineAmt()                                       |
| PX.Objects.AR | ARTran            | set_CuryLineAmt(Nullable<Decimal>)                      |
| PX.Objects.AP | APExternalTaxCalc | Process(APInvoice)                                      |
| PX.Objects.AP | APInvoiceEntry    | LandedCostTran_Source_CacheAttached(PXCache)            |
| PX.Objects.AP | APInvoiceEntry    | LandedCostTran_VendorID_CacheAttached(PXCache)          |
| PX.Objects.AP | APInvoiceEntry    | LandedCostTran_VendorLocationID_CacheAttached (PXCache) |
| PX.Objects.AP | APInvoiceEntry    | LandedCostTran_InvoiceNbr_CacheAttached(PXCache)        |
| PX.Objects.AP | APInvoiceEntry    | LandedCostTran_LineNbr_CacheAttached(PXCache)           |
| PX.Objects.AP | APInvoiceEntry    | LandedCostTran_LandedCostCodeID_CacheAttached (PXCache) |



| Namespace     | Simple Name    | Name   |
|---------------|----------------|--|
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_POReceiptType_CacheAttached (PXCache)     |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_POReceiptNbr_CacheAttached(PXCache)       |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_POReceiptLineNbr_CacheAttached (PXCache)  |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_APDocType_CacheAttached(PXCache)          |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_APRefNbr_CacheAttached(PXCache)           |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_INDocType_CacheAttached(PXCache)          |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_CuryID_CacheAttached(PXCache)             |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_APCuryInfoID_CacheAttached(PXCache)       |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_CuryInfoID_CacheAttached(PXCache)         |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_InventoryID_CacheAttached(PXCache)        |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_CuryLCAPAmount_CacheAttached (PXCache)    |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_LCAPAmount_CacheAttached(PXCache)         |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_CuryLCAmount_CacheAttached (PXCache)      |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_CuryLCAPEffAmount_CacheAttached (PXCache) |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_LCAmount_CacheAttached(PXCache)           |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_InvoiceDate_CacheAttached(PXCache)        |
| PX.Objects.AP | APInvoiceEntry | APTran_LCTranID_CacheAttached(PXCache)                   |
| PX.Objects.AP | APInvoiceEntry | ViewLCPOReceipt(PXAdapter)                               |
| PX.Objects.AP | APInvoiceEntry | ViewLCINDocument(PXAdapter)                              |

| Namespace     | Simple Name    | Name  |
|---------------|----------------|---|
| PX.Objects.AP | APInvoiceEntry | AddPostLandedCostTran(PXAdapter)  |
| PX.Objects.AP | APInvoiceEntry | LsLCSplits(PXAdapter)   |
| PX.Objects.AP | APInvoiceEntry | ResetProjectOnAccountChange(PXCache,APTran,Object)                                |
| PX.Objects.AP | APInvoiceEntry | POReceiptLineR_RowPersisting(PXCache, PXRowPersistingEventArgs)                   |
| PX.Objects.AP | APInvoiceEntry | APTran_RowDeleting(PXCache,PXRowDeletingEventArgs)                                |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowPersisting(PXCache, PXRowPersistingEventArgs)                   |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowSelected(PXCache, PXRowSelectedEventArgs)                       |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowInserting(PXCache, PXRowInsertingEventArgs)                     |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowInserted(PXCache, PXRowInsertedEventArgs)                       |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowUpdated(PXCache, PXRowUpdatedEventArgs)                         |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowDeleting(PXCache, PXRowDeletingEventArgs)                       |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_RowDeleted(PXCache, PXRowDeletedEventArgs)                         |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_POReceiptNbr_FieldUpdated (PXCache,PXFieldUpdatedEventArgs)        |
| PX.Objects.AP | APInvoiceEntry | LandedCostTran_LandedCostCodeID_FieldUpdated (PXCache,PXFieldUpdatedEventArgs)    |
| PX.Objects.AP | APInvoiceEntry | LandedCostTranR_RowPersisting(PXCache, PXRowPersistingEventArgs)                  |
| PX.Objects.AP | APInvoiceEntry | POReceipt_CuryID_FieldSelecting(PXCache, PXFieldSelectingEventArgs)               |
| PX.Objects.AP | APInvoiceEntry | InvoicePOReceipt(POReceipt,CurrencyInfo, DocumentList<APInvoice>,Boolean,Boolean) |
| PX.Objects.AP | APInvoiceEntry | InvoicePOOrder(POOrder,Boolean)   |
| PX.Objects.AP | APInvoiceEntry | InvoiceLandedCost(LandedCostTran,DocumentList <APInvoice>,Boolean)                |

| Namespace     | Simple Name    | Name   |
|---------------|----------------|--|
| PX.Objects.AP | APInvoiceEntry | GetVoucheredValues(APTran)                               |
| PX.Objects.AP | APInvoiceEntry | AddLandedCostTran(LandedCostTran,LandedCostCode)         |
| PX.Objects.AP | APInvoiceEntry | Copy(APTran,LandedCostTran,LandedCostCode)               |
| PX.Objects.AP | APInvoiceEntry | CollectGroupDiscountToPOLineCorrelation(POOrder)         |
| PX.Objects.AP | APInvoiceEntry | CollectGroupDiscountToPORceiptLineCorrelation (PORceipt) |
| PX.Objects.AP | APInvoiceEntry | ProratePODiscounts(PXCache,APTran,Boolean)               |
| PX.Objects.AP | APInvoiceEntry | ProratePOOrderDiscounts(PXCache,APTran,Boolean)          |
| PX.Objects.AP | APInvoiceEntry | ProratePORceiptDiscounts(PXCache,APTran,Boolean)         |
| PX.Objects.AP | APInvoiceEntry | get_IsExternalTax()                                      |
| PX.Objects.AP | APInvoiceEntry | CalculateAvalaraTax(APIInvoice)                          |
| PX.Objects.AP | APInvoiceEntry | BuildGetTaxRequest(APIInvoice)                           |
| PX.Objects.AP | APInvoiceEntry | ApplyAvalaraTax(APIInvoice,GetTaxResult)                 |
| PX.Objects.AP | APInvoiceEntry | CancelTax(APIInvoice,CancelCode)                         |
| PX.Objects.AP | APInvoiceEntry | LogMessages(BaseResult)                                  |
| PX.Objects.AP | APInvoiceEntry | GetToAddress(APIInvoice)                                 |
| PX.Objects.AP | APInvoiceEntry | GetBranchLocation(APIInvoice)                            |
| PX.Objects.AP | APInvoiceEntry | GetFromAddress(APIInvoice)                               |
| PX.Objects.AP | APInvoiceEntry | GetDocDiscount()   |
| PX.Objects.AP | APInvoiceEntry | GetAvalaraLocationCode(APIInvoice)                       |

| Namespace     | Simple Name     | Name  |
|---------------|-----------------|---|
| PX.Objects.AP | LinkLineReceipt | get_ReceiptCuryInfoID()                               |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptCuryInfoID(Nullable<Int64>)                |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptAmount()                                   |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptAmount(Nullable<Decimal>)                  |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptCuryAmount()                               |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptCuryAmount(Nullable<Decimal>)              |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptCuryUnbilledAmt()                          |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptCuryUnbilledAmt(Nullable<Decimal>)         |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptUnbilledAmt()                              |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptUnbilledAmt(Nullable<Decimal>)             |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptCuryUnbilledDiscountAmt()                  |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptCuryUnbilledDiscountAmt(Nullable<Decimal>) |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptUnbilledDiscountAmt()                      |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptUnbilledDiscountAmt(Nullable<Decimal>)     |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptTotalCuryUnbilledAmount()                  |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptTotalCuryUnbilledAmount(Nullable<Decimal>) |
| PX.Objects.AP | LinkLineReceipt | get_ReceiptTotalUnbilledAmount()                      |
| PX.Objects.AP | LinkLineReceipt | set_ReceiptTotalUnbilledAmount(Nullable<Decimal>)     |
| PX.Objects.AP | LinkLineOrder   | get_OrderBilledQty()                                  |

| Namespace     | Simple Name    | Name   |
|---------------|----------------|--|
| PX.Objects.AP | LinkLineOrder  | set_OrderBilledQty(Nullable<Decimal>)          |
| PX.Objects.AP | LinkLineOrder  | get_OrderBaseBilledQty()                       |
| PX.Objects.AP | LinkLineOrder  | set_OrderBaseBilledQty(Nullable<Decimal>)      |
| PX.Objects.AP | LinkLineOrder  | get_OrderCuryBilledAmt()                       |
| PX.Objects.AP | LinkLineOrder  | set_OrderCuryBilledAmt(Nullable<Decimal>)      |
| PX.Objects.AP | LinkLineOrder  | get_OrderBilledAmt()                           |
| PX.Objects.AP | LinkLineOrder  | set_OrderBilledAmt(Nullable<Decimal>)          |
| PX.Objects.AP | LinkLineOrder  | get_OrderUnbilledQty()                         |
| PX.Objects.AP | LinkLineOrder  | get_OrderBaseUnbilledQty()                     |
| PX.Objects.AP | LinkLineOrder  | get_OrderCuryUnbilledAmt()                     |
| PX.Objects.AP | LinkLineOrder  | get_OrderUnbilledAmt()                         |
| PX.Objects.AP | POReceiptLineS | get_BaseQty()                                  |
| PX.Objects.AP | POReceiptLineS | set_BaseQty(Nullable<Decimal>)                 |
| PX.Objects.AP | POReceiptLineS | get_BillQty()                                  |
| PX.Objects.AP | POReceiptLineS | get_CuryUnbilledAmt()                          |
| PX.Objects.AP | POReceiptLineS | set_CuryUnbilledAmt(Nullable<Decimal>)         |
| PX.Objects.AP | POReceiptLineS | get_CuryUnbilledDiscountAmt()                  |
| PX.Objects.AP | POReceiptLineS | set_CuryUnbilledDiscountAmt(Nullable<Decimal>) |
| PX.Objects.AP | POReceiptLineS | get_CuryDiscAmt()                              |

| Namespace     | Simple Name    | Name                                       |
|---------------|----------------|--|
| PX.Objects.AP | POReceiptLineS | set_CuryDiscAmt(Nullable<Decimal>)         |
| PX.Objects.AP | POReceiptLineS | get_DiscAmt()                              |
| PX.Objects.AP | POReceiptLineS | set_DiscAmt(Nullable<Decimal>)             |
| PX.Objects.AP | POReceiptLineS | get_CuryLineAmt()                          |
| PX.Objects.AP | POReceiptLineS | set_CuryLineAmt(Nullable<Decimal>)         |
| PX.Objects.AP | POReceiptLineS | get_LineAmt()                              |
| PX.Objects.AP | POReceiptLineS | set_LineAmt(Nullable<Decimal>)             |
| PX.Objects.AP | POReceiptLineS | get_OrderCuryInfoID()                      |
| PX.Objects.AP | POReceiptLineS | set_OrderCuryInfoID(Nullable<Int64>)       |
| PX.Objects.AP | POReceiptLineS | get_CuryOrderLineAmt()                     |
| PX.Objects.AP | POReceiptLineS | set_CuryOrderLineAmt(Nullable<Decimal>)    |
| PX.Objects.AP | POReceiptLineS | get_OrderLineAmt()                         |
| PX.Objects.AP | POReceiptLineS | set_OrderLineAmt(Nullable<Decimal>)        |
| PX.Objects.AP | POReceiptLineS | get_CuryOrderDiscAmt()                     |
| PX.Objects.AP | POReceiptLineS | set_CuryOrderDiscAmt(Nullable<Decimal>)    |
| PX.Objects.AP | POReceiptLineS | get_OrderDiscAmt()                         |
| PX.Objects.AP | POReceiptLineS | set_OrderDiscAmt(Nullable<Decimal>)        |
| PX.Objects.AP | POReceiptLineS | get_UnbilledDiscountAmt()                  |
| PX.Objects.AP | POReceiptLineS | set_UnbilledDiscountAmt(Nullable<Decimal>) |

| Namespace     | Simple Name              | Name   |
|---------------|--------------------------|--|
| PX.Objects.AP | POReceiptLineS           | get_UnbilledAmt()  |
| PX.Objects.AP | POReceiptLineS           | set_UnbilledAmt(Nullable<Decimal>)   |
| PX.Objects.AP | POReceiptLineS           | get_TotalCuryUnbilledAmount()  |
| PX.Objects.AP | POReceiptLineS           | set_TotalCuryUnbilledAmount(Nullable<Decimal>)   |
| PX.Objects.AP | POReceiptLineS           | get_TotalUnbilledAmount()  |
| PX.Objects.AP | POReceiptLineS           | set_TotalUnbilledAmount(Nullable<Decimal>)   |
| PX.Objects.AP | POReceiptLineS           | get_IsReturn()   |
| PX.Objects.AP | POReceiptLineS           | get_IsPartiallyBilled()  |
| PX.Objects.AP | POReceiptLineS           | get_IsBillAmtChanged()   |
| PX.Objects.AP | POOrderRS                | get_CuryLeftToBillCost()   |
| PX.Objects.AP | POOrderRS                | set_CuryLeftToBillCost(Nullable<Decimal>)  |
| PX.Objects.AP | POOrderRS                | get_LeftToBillQty()  |
| PX.Objects.AP | POOrderRS                | set_LeftToBillQty(Nullable<Decimal>)   |
| PX.Objects.AP | POLineS                  | get_OrderUnbilledQty()   |
| PX.Objects.AP | POLineS                  | get_OrderBaseUnbilledQty()   |
| PX.Objects.AP | POLineS                  | get_OrderCuryUnbilledAmt()   |
| PX.Objects.AP | POLineS                  | get_OrderUnbilledAmt()   |
| PX.Objects.AP | APIInvoiceEntryRetainage | ResetProjectOnAccountChange(PXCache,APTran, Object,APIInvoiceEntryRetainage+ResetProjectOnAccountChangeDelegate) |

| Namespace     | Simple Name             | Name  |
|---------------|-------------------------|---|
| PX.Objects.AP | APInvoiceDiscountDetail | set_LineNbr(Nullable<Int32>)  |
| PX.Objects.AP | APTran                  | get_LCTranID()  |
| PX.Objects.AP | APTran                  | set_LCTranID(Nullable<Int32>)   |
| PX.Objects.AP | APTaxAttribute          | CalcDocTotals(PXCache, Object, Decimal, Decimal, Decimal)   |
| PX.Objects.AP | APTaxAttribute          | _CalcDocTotals(PXCache, Object, Decimal, Decimal, Decimal)  |
| PX.Objects.AP | APOpenPeriodAttribute   | .ctor(Type)   |
| PX.Objects.AP | APOpenPeriodAttribute   | IsValidPeriod(PXCache, Object, Object)  |
| PX.Objects.AP | APReleaseProcess        | ReleaseInvoice(JournalEntry, APRegister&, PXResult<APInvoice, CurrencyInfo, Terms, Vendor>, Boolean)  |
| PX.Objects.AP | APReleaseProcess        | ReleaseInvoiceTransactionPostProcessing(JournalEntry, APInvoice, PXResult<APTran, APTax, Tax, DRDeferredCode, LandedCostTran, LandedCostCode, InventoryItem>, GLTran) |
| PX.Objects.AP | APReleaseProcess        | CreatePPVAdjustment(APInvoice, List<LandedCostHelper+PORceiptLineAdjustment>, List<APTran>)   |
| PX.Objects.AP | APReleaseProcess        | GetExpensePostingAmount(PXGraph, PORceiptLine)  |
| PX.Objects.AP | APReleaseProcess        | AdjustTaxCalculationLevelForNetGrossEntryMode (APInvoice, ITaxableDetail, Tax&)   |
| PX.Objects.AP | APReleaseProcess        | ReleasePayment(JournalEntry, APRegister&, PXResult<APPayment, CurrencyInfo, Currency, Vendor, CashAccount>)   |
| PX.Objects.AP | APReleaseProcess        | ReleasePayment(JournalEntry, APRegister&, PXResult<APPayment, CurrencyInfo, Currency, Vendor, CashAccount>, Nullable<Int32>)  |
| PX.Objects.AP | APReleaseProcess        | PORceipt_RowUpdated(PXCache, PXRowUpdatedEventArgs)   |
| PX.Common     | Func                    | Conjoin<TIn, TOut>(Func<TIn, Boolean>, Func<TIn, Boolean>)  |
| PX.Common     | Func                    | Disjoin<TIn, TOut>(Func<TIn, Boolean>, Func<TIn, Boolean>)  |



| Namespace | Simple Name         | Name   |
|-----------|---------------------|--|
| PX.TM     | InMember            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.TM     | Owned               | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.TM     | OwnedUser           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.TM     | Escalated           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.CS     | CSNewAttribute      | get_Dummy()  |
| PX.CS     | CSNewAttribute      | set_Dummy(String)  |
| PX.CS     | RMReportMaint       | RMReport_RowSelecting(PXCache,PXRowSelectingEventArgs)   |
| PX.CS     | RMReportMaint       | RMReport_RowPersisting(PXCache,PXRowPersistingEventArgs)   |
| PX.CS     | RMReportMaint       | RMReport_SitemapParent_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.SM     | AUScreenActionState | get_StateID()  |
| PX.SM     | AUScreenActionState | set_StateID(Nullable<Guid>)  |
| PX.SM     | AUScreenActionState | get_ScreenID()   |
| PX.SM     | AUScreenActionState | set_ScreenID(String)   |
| PX.SM     | AUScreenActionState | get_ActionID()   |
| PX.SM     | AUScreenActionState | set_ActionID(String)   |
| PX.SM     | AUScreenActionState | get_DataMember()   |
| PX.SM     | AUScreenActionState | set_DataMember(String)   |

| Namespace | Simple Name            | Name                              |
|-----------|------------------------|-----------------------------------|
| PX.SM     | AUScreenActionState    | get_Method()                      |
| PX.SM     | AUScreenActionState    | set_Method(String)                |
| PX.SM     | AUScreenActionState    | get_ActionName()                  |
| PX.SM     | AUScreenActionState    | set_ActionName(String)            |
| PX.SM     | AUScreenActionState    | get_IsTopLevel()                  |
| PX.SM     | AUScreenActionState    | set_IsTopLevel(Nullable<Boolean>) |
| PX.SM     | AUScreenActionState    | get_Sequence()                    |
| PX.SM     | AUScreenActionState    | set_Sequence(Nullable<Int32>)     |
| PX.SM     | AUScreenActionState    | get_IsEnable()                    |
| PX.SM     | AUScreenActionState    | set_IsEnable(Nullable<Boolean>)   |
| PX.SM     | AUScreenActionState    | get_EnableCondition()             |
| PX.SM     | AUScreenActionState    | set_EnableCondition(String)       |
| PX.SM     | AUScreenActionState    | get_IsVisible()                   |
| PX.SM     | AUScreenActionState    | set_IsVisible(Nullable<Boolean>)  |
| PX.SM     | AUScreenActionState    | get_VisibleCondition()            |
| PX.SM     | AUScreenActionState    | set_VisibleCondition(String)      |
| PX.SM     | AUScreenConditionState | get_StateID()                     |
| PX.SM     | AUScreenConditionState | set_StateID(Nullable<Guid>)       |

| Namespace | Simple Name            | Name   |
|-----------|------------------------|--|
| PX.SM     | AUScreenConditionState | get_ScreenID()   |
| PX.SM     | AUScreenConditionState | set_ScreenID(String)   |
| PX.SM     | AUScreenConditionState | get_ConditionID()  |
| PX.SM     | AUScreenConditionState | set_ConditionID(String)  |
| PX.SM     | AUScheduleMaint        | get_DataScreen()   |
| PX.SM     | AUScheduleMaint        | set_DataScreen(DataScreenBase)   |
| PX.SM     | CompanyMaint           | PersistUser(UPCompany,Users,PreferencesSecurity,Boolean,DbmsMaintenance)   |
| PX.Data   | IBqlCreator            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | PXSelectorAttribute    | get_ShowPopupMessageOnSelecting()  |
| PX.Data   | PXSelectorAttribute    | set_ShowPopupMessageOnSelecting(Boolean)   |
| PX.Data   | PXSelectorAttribute    | get_ShowPopupMessageOnVerifying()  |
| PX.Data   | PXSelectorAttribute    | set_ShowPopupMessageOnVerifying(Boolean)   |
| PX.Data   | PXView                 | prepareSorts(String[],Boolean[],Object[],Int32,Boolean&,Boolean&,Boolean&)                                       |
| PX.Data   | Constant               | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Abs                    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |

| Namespace | Simple Name           | Name  |
|-----------|-----------------------|---|
| PX.Data   | BqlFunction           | parseOperand<Operand>(IBqlCreator&,PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Power                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                              |
| PX.Data   | ExternalValue         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                              |
| PX.Data   | InBase                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                              |
| PX.Data   | InBase3               | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                              |
| PX.Data   | InBase3               | Parse1(Int32,PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                       |
| PX.Data   | InFieldClassActivated | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                              |
| PX.Data   | BqlCommand            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                              |
| PX.Data   | BqlCommand            | GetText(PXGraph,PXView)   |
| PX.Data   | BqlCommand            | GetTableName(Type,PXGraph,Func<IList<IBqlUnary>>,List<IBqlParameter>,IEnumerable<Type>,Boolean)   |
| PX.Data   | BqlCommand            | InsertFields(Type,PXGraph,BqlCommand+Selection)   |
| PX.Data   | BqlCommand            | InsertFields(Type,PXGraph,BqlCommand+Selection,Boolean)   |
| PX.Data   | BqlCommand            | InsertFunctionFields(Type,PXGraph,BqlCommand+Selection,IBqlFunction[])  |
| PX.Data   | BqlCommand            | InsertFunctionFields(Type,PXGraph,BqlCommand+Selection,IBqlFunction[],Boolean)  |
| PX.Data   | BqlCommand            | ConvertAndFilterPredicatesForNestedSelect(BqlCommand,PXCache,Func<IList<IBqlUnary>>,PXGraph,Type)   |

| Namespace | Simple Name | Name   |
|-----------|-------------|--|
| PX.Data   | BqlCommand  | FilterOutAggregatedPredicates(IList<IBqlUnary>,IBqlFunction[],PXGraph)   |
| PX.Data   | BqlCommand  | BuildJoins(PXGraph,IBqlJoin,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,BqlCommand+Selection,StringBuilder,Func<IList<IBqlUnary>>,IBqlFunction[]) |
| PX.Data   | BqlCommand  | ParseFullTextConditions(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,BqlCommand+Selection,IList<IBqlUnary>,Boolean)                        |
| PX.Data   | BqlCommand  | BulidWhere(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,BqlCommand+Selection,Boolean,IEnumerable<IBqlUnary>,IEnumerable<IBqlUnary>)        |
| PX.Data   | BqlCommand  | GetSingleField(Type,PXGraph,List<Type>,BqlCommand+Selection,BqlCommand+FieldPlace)   |
| PX.Data   | Selection   | Add(String,String)   |
| PX.Data   | Selection   | Add(String)  |
| PX.Data   | Selection   | Get(String)  |
| PX.Data   | IBqlJoin    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection,IBqlFunction[])                                      |
| PX.Data   | IBqlUnary   | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)   |
| PX.Data   | Default     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)   |
| PX.Data   | Parent      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)   |
| PX.Data   | Row         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)   |
| PX.Data   | Row         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)   |

| Namespace | Simple Name      | Name  |
|-----------|------------------|---|
| PX.Data   | WithDependencies | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | Selector         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | Foreign          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | Validate         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | RankOf           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | FreeTextBase     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | BqlNone          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | BqlNone          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection,IBqlFunction[]) |
| PX.Data   | ComparisonBase   | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | Add              | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | Plus             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | BitwiseAnd       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |
| PX.Data   | Case2            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                |

| Namespace | Simple Name | Name   |
|-----------|-------------|--|
| PX.Data   | DateDiff    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | DatePart    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Div         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Divide      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | IsNull      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Minus       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Minus1      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Mult        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Multiply    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | NullIf      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Replace     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Round       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | RTrim       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |

| Namespace | Simple Name            | Name   |
|-----------|------------------------|--|
| PX.Data   | StrLen                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Sub                    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Minus                  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Substring              | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Switch                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Switch                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | IIf                    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | IIf2                   | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | IBqlSet                | Parse(PXGraph,List<Type>,List<IBqlParameter>,List<KeyValuePair<String,String>>)                                  |
| PX.Data   | Set                    | Parse(PXGraph,List<Type>,List<IBqlParameter>,List<KeyValuePair<String,String>>)                                  |
| PX.Data   | Set                    | Parse(PXGraph,List<Type>,List<IBqlParameter>,List<KeyValuePair<String,String>>)                                  |
| PX.Data   | PXGraph                | GetService<TService>()   |
| PX.Data   | PXDBAttributeAttribute | GetAttributesJoinedQuery(PXGraph,StringBuilder,List<Type>,Type,IBqlWhere)  |
| PX.Data   | PopupMessageAttribute  | get_ShowPopupMessageOnSelecting()  |



| Namespace | Simple Name             | Name   |
|-----------|-------------------------|--|
| PX.Data   | PopupMessageAttribute   | set_ShowPopupMessageOnSelecting(Boolean)   |
| PX.Data   | PopupMessageAttribute   | get_ShowPopupMessageOnVerifying()  |
| PX.Data   | PopupMessageAttribute   | set_ShowPopupMessageOnVerifying(Boolean)   |
| PX.Data   | PopupNoteManager        | ShowPrimaryViewWarning(PXGraph)  |
| PX.Data   | PopupNoteManager        | StorePrimaryViewWarning(PXCache,String,String)                                     |
| PX.Data   | GIDescription           | get_AggregateFunction()  |
| PX.Data   | GIDescription           | set_AggregateFunction(Nullable<AggregateFunction>)                                 |
| PX.Data   | GIDescription           | get_AggregateField()   |
| PX.Data   | GIDescription           | set_AggregateField(String)   |
| PX.Data   | PXGenericInqGrph        | get_Columns()  |
| PX.Data   | PXGenericInqGrph        | GenerateResultField(GIResult,Boolean,GI Table,Type,PXCache,Boolean)                |
| PX.Data   | LayeredNavigationAction | .ctor(String,String)   |
| PX.Data   | PXDatabaseProviderBase  | _AddParameter(IDbCommand,Int32,PXDbType,Nullable<Int32>,ParameterDirection,Object) |
| PX.Data   | PXDatabaseProviderBase  | alterText(String,Int32,Int32,Boolean,Boolean)                                      |
| PX.Data   | PXDatabaseProviderBase  | alterText(String,Int32,Int32,Boolean,Boolean,Boolean&)                             |

| Namespace | Simple Name       | Name   |
|-----------|-------------------|--|
| PX.Data   | ISqlDialect       | flattenSubselects(String,DialectScripter)                                |
| PX.Data   | ISqlDialect       | prepareAttributesJoined(PXGraph,StringBuilder,List<Type>,Type,IBqlWhere) |
| PX.Data   | SqlDialectBase    | prepareAttributesJoined(PXGraph,StringBuilder,List<Type>,Type,IBqlWhere) |
| PX.Data   | SqlDialectBase    | prepareNoteAttributesJoined(StringBuilder,Type,Type,Type)                |
| PX.Data   | SqlDialectBase    | flattenSubselects(String,DialectScripter)                                |
| PX.Data   | BqlGenericCommand | get_Description()  |
| PX.Data   | BqlGenericCommand | get_FieldsCount()  |
| PX.Data   | BqlGenericCommand | get_RealFieldsCount()  |
| PX.Data   | BqlGenericCommand | BuildText(PXGraph,StringBuilder,BqlCommand+Selection)                    |
| PX.Data   | BqlGenericCommand | AppendOuterAggregate(StringBuilder,BqlCommand+Selection,ISqlDialect)     |
| PX.Data   | BqlGenericCommand | InsertFields(BqlCommand+Selection,Int32,ISqlDialect)                     |
| PX.Data   | BqlGenericCommand | InsertFields(PXTable,BqlCommand+Selection,ISqlDialect)                   |
| PX.Data   | BqlGenericCommand | InsertExtFields(BqlCommand+Selection,Int32,ISqlDialect)                  |
| PX.Data   | BqlGenericCommand | AppendFROM(StringBuilder,Int32,ISqlDialect)                              |
| PX.Data   | BqlGenericCommand | AppendONConditions(StringBuilder,PXRelation,Int32,ISqlDialect)           |
| PX.Data   | BqlGenericCommand | AppendWHERE(StringBuilder,List<PXWhereCond>,Int32,ISqlDialect,Boolean)   |
| PX.Data   | BqlGenericCommand | AppendRestriction(StringBuilder,ISqlDialect)                             |
| PX.Data   | BqlGenericCommand | AppendORDER(StringBuilder,Int32,ISqlDialect)                             |
| PX.Data   | BqlGenericCommand | AppendGROUPBY(StringBuilder,Int32,ISqlDialect)                           |

| Namespace | Simple Name            | Name   |
|-----------|------------------------|--|
| PX.Data   | BqlGenericCommand      | CreateParameterName(String,String,StringBuilder,Int32&)  |
| PX.Data   | BqlGenericCommand      | ParameterHandler(String,Int32&,ISqlDialect,PXDBOperation,Boolean,Boolean)  |
| PX.Data   | BqlGenericCommand      | GetSqlFormatStringToAggregateField(PXTable,String,PXDbType)  |
| PX.Data   | BqlGenericCommand      | GetSqlFormatFormulaToAggregateField(String,PXDbType,ISqlDialect)   |
| PX.Data   | PXLogin                | SessionExpired(String,String,String)   |
| PX.Data   | ScreenInfo             | .ctor(String,String,PXSiteMap+ScreenInfo+Action[],String)  |
| PX.Data   | Action                 | .ctor(String,String,Boolean,PXSpecialButtonType,Boolean,Boolean,String,String)                                   |
| PX.Data   | AggregatedFnBase       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | GroupByBase            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Count                  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Count                  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | BqlPredicateBinaryBase | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | And                    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Or                     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Between                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |

| Namespace | Simple Name         | Name  |
|-----------|---------------------|---|
| PX.Data   | NotBetween          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | IsNull              | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | IsNotNull           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | Null                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | CurrentValue        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | SavedStringValue    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | CurrentMatch        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | CurrentMatch        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | BqlFormula          | parseNext<TOperand>(IBqlCreator&,PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | BqlFormulaEvaluator | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | BqlFormula          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                            |
| PX.Data   | JoinBase            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection,IBqlFunction[])             |
| PX.Data   | JoinBase            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection,IBqlFunction[],Boolean)     |

| Namespace | Simple Name   | Name   |
|-----------|---------------|--|
| PX.Data   | OnBase        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | OnBase        | ParseConditions(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | ParameterBase | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | OrderBy       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | AscDescBase   | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | FieldNameAsc  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | FieldNameDesc | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | FieldNameAsc  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | FieldNameDesc | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | Not           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | Not           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | Not           | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |
| PX.Data   | Not2          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)           |

| Namespace | Simple Name           | Name   |
|-----------|-----------------------|--|
| PX.Data   | IsSingleBranchCompany | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | FeatureInstalled      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | MatchWithBranch       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | MatchWithOrganization | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | MatchWithBranch       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Match                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Match                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | Exists                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | NotExists             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | CustomPredicate       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | WhereBase             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | WhereBase             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data   | PXUniqueAttribute     | get_WhereCondition()   |

| Namespace       | Simple Name                 | Name  |
|-----------------|-----------------------------|---|
| PX.Data         | PXUniqueAttribute           | set_WhereCondition(Type)  |
| PX.Data         | PXQueryResult               | get_IsExpired()   |
| PX.Data         | PXGraphQueryCacheCollection | Clone()   |
| PX.Data.SQLTree | Connection                  | SQLExpression(Constant)   |
| PX.Data.SQLTree | SQLExpression               | SetLeft(SQLExpression)  |
| PX.Data.SQLTree | SQLExpression               | SetRight(SQLExpression)   |
| PX.Data.SQLTree | SQLExpression               | SetOper(SQLExpression+Operation)                                  |
| PX.Data.SQLTree | SQLExpression               | NullIf(Constant)  |
| PX.Data.SQLTree | SQLExpression               | Equal(SQLExpression,SQLExpression)                                |
| PX.Data.SQLTree | SQLExpression               | Equal(Type,Type)  |
| PX.Data.SQLTree | SQLExpression               | NotEqual(SQLExpression,SQLExpression)                             |
| PX.Data.SQLTree | SQLExpression               | NotEqual(Type,Type)   |
| PX.Data.SQLTree | SQLExpression               | DatePartByTimeZone(Constant<String>,SQLExpression,PXTimeZoneInfo) |
| PX.Data.SQLTree | SQLExpressionExt            | Equal(SQLExpression,SQLExpression)                                |
| PX.Data.SQLTree | SQLExpressionExt            | Equal(SQLExpression,Object)                                       |
| PX.Data.SQLTree | SQLExpressionExt            | Equal(Type,SQLExpression)   |
| PX.Data.SQLTree | SQLExpressionExt            | Equal(Type,Type)  |
| PX.Data.SQLTree | SQLExpressionExt            | Equal(Type,Object)  |

| Namespace       | Simple Name                   | Name  |
|-----------------|-------------------------------|---|
| PX.Data.SQLTree | SQLExpressionExt              | NotEqual(SQLExpression,SQLExpression)               |
| PX.Data.SQLTree | SQLExpressionExt              | NotEqual(SQLExpression,Object)                      |
| PX.Data.SQLTree | SQLExpressionExt              | NotEqual(Type,SQLExpression)                        |
| PX.Data.SQLTree | SQLExpressionExt              | NotEqual(Type,Type)                                 |
| PX.Data.SQLTree | SQLExpressionExt              | NotEqual(Type,Object)                               |
| PX.Data.SQLTree | Literal                       | .ctor()   |
| PX.Data.SQLTree | Literal                       | GetDBType()   |
| PX.Data.SQLTree | Column                        | GetDBType()   |
| PX.Data.SQLTree | Column                        | Columns(Type,String)                                |
| PX.Data.SQLTree | SQLDateDiff                   | .ctor(String)                                       |
| PX.Data.SQLTree | SQLDateDiff                   | .ctor(Constant<String>)                             |
| PX.Data.SQLTree | SQLDatePart                   | .ctor(Constant<String>,SQLExpression)               |
| PX.Data.SQLTree | SQLDateAdd                    | .ctor(Constant<String>,SQLExpression,SQLExpression) |
| PX.Data.SQLTree | SQLFullTextSearch             | .ctor()   |
| PX.Data.SQLTree | ProjectionItem                | GetValue(Object[],Int32&)                           |
| PX.Data.SQLTree | ProjectionItem                | .ctor()   |
| PX.Data.SQLTree | ProjectionConst               | .ctor(Type)   |
| PX.Data.SQLTree | ProjectionReferenceEnumerable | .ctor(Type)   |



| Namespace              | Simple Name         | Name   |
|------------------------|---------------------|--|
| PX.Data.SQLTree        | ProjectionReference | .ctor(Type)  |
| PX.Data.SQLTree        | ProjectionNew       | .ctor(ConstructorInfo,Int32)   |
| PX.Data.SQLTree        | ProjectionNew       | SetElement(Int32,String,ProjectionItem)  |
| PX.Data.SQLTree        | Query               | SetProjection(ProjectionItem)  |
| PX.Data.SQLTree        | Query               | Projection()   |
| PX.Data.SQLTree        | Query               | Field(Type)  |
| PX.Data.SQLTree        | Query               | Select(Column[])   |
| PX.Data.SQLTree        | OrderSegment        | .ctor(OrderSegment)  |
| PX.Data.BQL            | Contains            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Data.Description.GI | IPXValue            | GetText(Func<String,String>)   |
| PX.Data.Description.GI | IPXValue            | GetBqlField(PXCache,Int32,String)  |
| PX.Data.Description.GI | PXQueryDescription  | get_ Tables()  |
| PX.Data.Description.GI | PXQueryDescription  | get_ Parameters()  |
| PX.Data.Description.GI | PXQueryDescription  | get_ UsedTables()  |
| PX.Data.Description.GI | PXQueryDescription  | get_ Relations()   |
| PX.Data.Description.GI | PXQueryDescription  | get_ Wheres()  |
| PX.Data.Description.GI | PXQueryDescription  | set_ Wheres(List<PXWhereCond>)   |
| PX.Data.Description.GI | PXQueryDescription  | get_ FilterWheres()  |

| Namespace              | Simple Name            | Name  |
|------------------------|------------------------|---|
| PX.Data.Description.GI | PXQueryDescription     | set_FilterWheres(List<PXWhereCond>)                               |
| PX.Data.Description.GI | PXQueryDescription     | get_Searches()  |
| PX.Data.Description.GI | PXQueryDescription     | set_Searches(List<PXWhereCond>)                                   |
| PX.Data.Description.GI | PXQueryDescription     | get_ExtFields()   |
| PX.Data.Description.GI | PXQueryDescription     | get_Sorts()   |
| PX.Data.Description.GI | PXQueryDescription     | set_Sorts(List<PXSort>)   |
| PX.Data.Description.GI | PXQueryDescription     | get_GroupBys()  |
| PX.Data.Description.GI | PXQueryDescription     | get_AggregateFunction()   |
| PX.Data.Description.GI | PXQueryDescription     | set_AggregateFunction(Nullable<AggregateFunction>)                |
| PX.Data.Description.GI | PXQueryDescription     | get_AggregateField()  |
| PX.Data.Description.GI | PXQueryDescription     | set_AggregateField(String)  |
| PX.Data.Description.GI | PXQueryDescription     | get_ExternalWhere()   |
| PX.Data.Description.GI | PXQueryDescription     | set_ExternalWhere(String)   |
| PX.Data.Maintenance.GI | GenericInquiryDesigner | GIResult_NavigateTo_FieldUpdated(PXCache,PXFieldUpdatedEventArgs) |
| PX.Data.Maintenance.GI | GINavigationParameter  | get_ScreenID()  |
| PX.Data.Maintenance.GI | GINavigationParameter  | set_ScreenID(String)  |
| PX.Data.Maintenance.GI | GINavigationParameter  | get_ParamID()   |
| PX.Data.Maintenance.GI | GINavigationParameter  | set_ParamID(Nullable<Int32>)                                      |
| PX.Data.Maintenance.GI | GIResult               | get_NavigateTo()  |

| Namespace                 | Simple Name       | Name  |
|---------------------------|-------------------|---|
| PX.Data.Maintenance.GI    | GIResult          | set_NavigateTo(String)  |
| PX.Api                    | mappingConst      | .ctor(String)   |
| PX.Api.Mobile.Controllers | LoginController   | .ctor(ILoginService,ITrackingService,ICompanyService)                               |
| PX.Objects.PM             | PMChangeOrderLine | get_AmountInBaseCury()  |
| PX.Objects.PM             | PMChangeOrderLine | set_AmountInBaseCury(Nullable<Decimal>)   |
| PX.Objects.PM             | ProformaEntry     | PMRevenueBudget_ActualAmount_CacheAttached(PXCache)                                 |
| PX.Objects.PM             | ProformaEntry     | PMRevenueBudget_InvoicedAmount_CacheAttached(PXCache)                               |
| PX.Objects.PM             | ProformaEntry     | _(Events+FieldUpdated<PMProformaTransactLine,PMProformaLine+curyPrepaidAmount>)     |
| PX.Objects.PM             | ProformaEntry     | _(Events+FieldUpdated<PMProformaProgressLine,PMProformaLine+curyPrepaidAmount>)     |
| PX.Objects.PM             | ProformaEntry     | _(Events+FieldUpdated<PMProformaProgressLine,PMProformaProgressLine+curyLineTotal>) |
| PX.Objects.PM             | ProformaEntry     | AddToInvoiced(PMProformaProgressLine,Decimal)                                       |
| PX.Objects.PM             | ProformaEntry     | AddToInvoiced(PMProformaTransactLine,Decimal)                                       |
| PX.Objects.PM             | ProformaEntry     | AddToInvoiced(PMProformaLine,Decimal,Nullable<Int32>)                               |
| PX.Objects.PM             | ProformaEntry     | SubtractPerpaymentRemainder(PMProformaLine,Decimal)                                 |
| PX.Objects.PM             | ProformaEntry     | SubtractAmountToInvoice(PMProformaLine,Decimal)                                     |
| PX.Objects.PM             | ProformaEntry     | ConvertToBaseCurrency(Nullable<Decimal>)  |
| PX.Objects.PM             | PMBudget          | get_Rate()  |
| PX.Objects.PM             | PMBudget          | set_Rate(Nullable<Decimal>)   |
| PX.Objects.PM             | PMBudget          | get_RevisedAmount()   |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.PM | PMBudget              | set_RevisedAmount(Nullable<Decimal>)                     |
| PX.Objects.PM | PMBudget              | get_InvoicedAmount()                                     |
| PX.Objects.PM | PMBudget              | set_InvoicedAmount(Nullable<Decimal>)                    |
| PX.Objects.PM | PMBudget              | get_ActualAmount()                                       |
| PX.Objects.PM | PMBudget              | set_ActualAmount(Nullable<Decimal>)                      |
| PX.Objects.PM | PMBudget              | get_ChangeOrderAmount()                                  |
| PX.Objects.PM | PMBudget              | set_ChangeOrderAmount(Nullable<Decimal>)                 |
| PX.Objects.PM | PMBudget              | get_CommittedAmount()                                    |
| PX.Objects.PM | PMBudget              | set_CommittedAmount(Nullable<Decimal>)                   |
| PX.Objects.PM | PMBudget              | get_CommittedOpenAmount()                                |
| PX.Objects.PM | PMBudget              | set_CommittedOpenAmount(Nullable<Decimal>)               |
| PX.Objects.PM | PMBudget              | get_CommittedInvoicedAmount()                            |
| PX.Objects.PM | PMBudget              | set_CommittedInvoicedAmount(Nullable<Decimal>)           |
| PX.Objects.PM | PMCommitmentAttribute | AddInvoiced(PXCache,PMCommitment)                        |
| PX.Objects.PM | PMCommitmentAttribute | AddToInvoiced(PXCache,PMCommitment)                      |
| PX.Objects.PM | ProjectBalance        | Calculate(PMProject,PMTran,PMAccountGroup,Account,Int32) |
| PX.Objects.PM | ProjectBalance        | SelectProjectBalance(IProjectFilter)                     |
| PX.Objects.PM | ProjectBalance        | SelectProjectBalanceByCostCodes(IProjectFilter)          |

| Namespace     | Simple Name                     | Name  |
|---------------|---------------------------------|---|
| PX.Objects.PM | ProjectBalance                  | SelectProjectBalanceByInventory(IProjectFilter)   |
| PX.Objects.PM | Result                          | .ctor(IList<PMHistory>,PMBudget,PMTaskTotal)  |
| PX.Objects.PM | ProjectBalanceMaint             | _(Events+FieldUpdated<PMBudget,PMCostBudget+amount>)  |
| PX.Objects.PM | ProjectBalanceMaint             | _(Events+FieldUpdated<PMBudget,PMBudget+amount>)  |
| PX.Objects.PM | ProjectBalanceMaint             | _(Events+FieldDefaulting<PMBudget,PMBudget+rate>)   |
| PX.Objects.PM | PMAllocator                     | ReverseCreditMemo(String,List<PXResult<ARTran,PMTran>>)   |
| PX.Objects.PM | PMAllocator                     | NonGIBillLaterAndReverse(String,List<PXResult<ARTran,PMTran>>,List<PXResult<ARTran,PMTran>>,List<Tuple<PMProformaTransactLine,PMTran>>,List<PMTran>)                                    |
| PX.Objects.PM | PMBillEngine                    | InsertTransactionsInProforma(List<PMBillEngine+BillingData>)  |
| PX.Objects.PM | PMBillEngine                    | InsertTransactionsInInvoice(List<PMBillEngine+BillingData>,Int32)   |
| PX.Objects.PM | PMBillEngine                    | InsertTransaction(PMProformaLine,String,String,Guid[])  |
| PX.Objects.PM | PMBillEngine                    | InsertNewInvoiceDocument(String,String,Decimal,Customer,PMProject,DateTime,String,Nullable<Int32>)  |
| PX.Objects.PM | PMBillEngine                    | GetDocTypeAndRetainage(List<PMBillEngine+BillingData>)  |
| PX.Objects.PM | PMBillEngine                    | Transform(List<PMTran>,PMBillingRule,PMTask)  |
| PX.Objects.PM | PMBillEngine                    | CalculateFormulas(PMAllocator+PMDataNavigator,PMBillingRule,PMTran,Nullable<Decimal>&,Nullable<Decimal>&,String&)   |
| PX.Objects.PM | PMBillEngine                    | GetCurrencyInfo(Nullable<Int32>,Nullable<DateTime>)   |
| PX.Objects.PM | ProjectBalanceValidationProcess | ProcessTransaction(PMProject,PXResult<PMTran,Account,ProjectBalanceValidationProcess+OffsetAccount,PMAccountGroup,ProjectBalanceValidationProcess+OffsetPMAccountGroup>,ProjectBalance) |
| PX.Objects.PM | ProjectBalanceValidationProcess | RecalculateChangeOrders(PMProject,ProjectBalance,Dictionary<BudgetKeyTuple,ProjectBalanceValidationProcess+PMBudgetEx>)   |

| Namespace     | Simple Name                     | Name   |
|---------------|---------------------------------|--|
| PX.Objects.PM | ProjectBalanceValidationProcess | BuildBudgetClearCommand(PMValidationFilter,ProjectBalanceValidationProcess+PMBudgetEx)                 |
| PX.Objects.PM | ProjectBalanceValidationProcess | BuildBudgetClearCommandWithChangeOrders(PMValidationFilter,ProjectBalanceValidationProcess+PMBudgetEx) |
| PX.Objects.PM | TemplateMaint                   | PMProject_CuryID_FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)                                   |
| PX.Objects.PM | TemplateMaint                   | _(Events+FieldDefaulting<PMRevenueBudget,PMRevenueBudget+rate>)  |
| PX.Objects.PM | TemplateMaint                   | _(Events+FieldVerifying<PMRevenueBudget,PMRevenueBudget+prepaymentAmount>)                             |
| PX.Objects.PM | TemplateMaint                   | _(Events+FieldUpdated<PMRevenueBudget,PMRevenueBudget+prepaymentAmount>)                               |
| PX.Objects.PM | TemplateMaint                   | _(Events+FieldDefaulting<PMCostBudget,PMCostBudget+rate>)  |
| PX.Objects.PM | PMTaskTotal                     | get_Asset()  |
| PX.Objects.PM | PMTaskTotal                     | set_Asset(Nullable<Decimal>)   |
| PX.Objects.PM | PMTaskTotal                     | get_Liability()  |
| PX.Objects.PM | PMTaskTotal                     | set_Liability(Nullable<Decimal>)   |
| PX.Objects.PM | PMTaskTotal                     | get_Income()   |
| PX.Objects.PM | PMTaskTotal                     | set_Income(Nullable<Decimal>)  |
| PX.Objects.PM | PMTaskTotal                     | get_Expense()  |
| PX.Objects.PM | PMTaskTotal                     | set_Expense(Nullable<Decimal>)   |
| PX.Objects.PM | RegisterEntry                   | get_FinPeriodRepository()  |
| PX.Objects.PM | RegisterEntry                   | PMRegister_RowDeleted(PXCache,PXRowDeletedEventArgs)   |
| PX.Objects.PM | RegisterEntry                   | PMRegister_RowSelected(PXCache,PXRowSelectedEventArgs)   |

| Namespace     | Simple Name   | Name   |
|---------------|---------------|--|
| PX.Objects.PM | RegisterEntry | PMTran_RowSelected(PXCache,PXRowSelectedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_RowInserted(PXCache,PXRowInsertedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_RowUpdated(PXCache,PXRowUpdatedEventArgs)   |
| PX.Objects.PM | RegisterEntry | _(Events+FieldUpdated<PMTran,PMTran+unitRate>)   |
| PX.Objects.PM | RegisterEntry | _(Events+FieldUpdated<PMTran,PMTran+useBillableQty>)   |
| PX.Objects.PM | RegisterEntry | PMTran_RowDeleted(PXCache,PXRowDeletedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_RowPersisting(PXCache,PXRowPersistingEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_BAccountID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.PM | RegisterEntry | PMTran_InventoryID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_Qty_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_Billable_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.PM | RegisterEntry | PMTran_BillableQty_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_UOM_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.PM | RegisterEntry | PMTran_Date_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.PM | RegisterEntry | PMTran_ResourceID_FieldVerifying(PXCache,PXFieldVerifyingEventArgs)  |
| PX.Objects.PM | RegisterEntry | PMTran_BillableQty_FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)   |
| PX.Objects.PM | NonProject    | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.PM | PMHistory     | get_FinPTDAmount()   |

| Namespace     | Simple Name  | Name  |
|---------------|--------------|---|
| PX.Objects.PM | PMHistory    | set_FinPTDAmount(Nullable<Decimal>)                                     |
| PX.Objects.PM | PMHistory    | get_TransPTDAmount()  |
| PX.Objects.PM | PMHistory    | set_TransPTDAmount(Nullable<Decimal>)                                   |
| PX.Objects.PM | PMHistory    | get_FinYTDAmount()  |
| PX.Objects.PM | PMHistory    | set_FinYTDAmount(Nullable<Decimal>)                                     |
| PX.Objects.PM | PMHistory    | get_TransYTDAmount()  |
| PX.Objects.PM | PMHistory    | set_TransYTDAmount(Nullable<Decimal>)                                   |
| PX.Objects.PM | PMTran       | get_UnitRate()  |
| PX.Objects.PM | PMTran       | set_UnitRate(Nullable<Decimal>)   |
| PX.Objects.PM | PMTran       | get_Amount()  |
| PX.Objects.PM | PMTran       | set_Amount(Nullable<Decimal>)   |
| PX.Objects.PM | PMTran       | get_InvoicedAmount()  |
| PX.Objects.PM | PMTran       | set_InvoicedAmount(Nullable<Decimal>)                                   |
| PX.Objects.PM | ProjectEntry | ARInvoice_OrigDocAmt_CacheAttached(PXCache)                             |
| PX.Objects.PM | ProjectEntry | _(Events+FieldDefaulting<PMProject,Contract+curyID>)                    |
| PX.Objects.PM | ProjectEntry | _(Events+FieldUpdated<PMRevenueBudget,PMRevenueBudget+amount>)          |
| PX.Objects.PM | ProjectEntry | _(Events+FieldDefaulting<PMRevenueBudget,PMRevenueBudget+rate>)         |
| PX.Objects.PM | ProjectEntry | _(Events+FieldUpdated<PMRevenueBudget,PMRevenueBudget+revisedAmount>)   |
| PX.Objects.PM | ProjectEntry | _(Events+FieldUpdated<PMRevenueBudget,PMRevenueBudget+amountToInvoice>) |



| Namespace     | Simple Name            | Name   |
|---------------|------------------------|--|
| PX.Objects.PM | ProjectEntry           | _(Events+FieldVerifying<PMRevenueBudget,PMRevenueBudget+prepaymentAmount>) |
| PX.Objects.PM | ProjectEntry           | _(Events+FieldUpdated<PMRevenueBudget,PMRevenueBudget+prepaymentAmount>)   |
| PX.Objects.PM | ProjectEntry           | _(Events+FieldSelecting<PMRevenueBudget,PMRevenueBudget+amountToInvoice>)  |
| PX.Objects.PM | ProjectEntry           | _(Events+FieldVerifying<PMRevenueBudget,PMRevenueBudget+amountToInvoice>)  |
| PX.Objects.PM | ProjectEntry           | _(Events+FieldUpdated<PMCostBudget,PMCostBudget+amount>)                   |
| PX.Objects.PM | ProjectEntry           | _(Events+FieldDefaulting<PMCostBudget,PMCostBudget+rate>)                  |
| PX.Objects.PM | ProjectEntry           | _(Events+FieldUpdated<PMOtherBudget,PMOtherBudget+amount>)                 |
| PX.Objects.PM | ProjectEntry           | ApplyChangeOrderBudget(PMChangeOrderBudget)                                |
| PX.Objects.PM | ProjectEntry           | CreateTotal(String,Decimal,Decimal,Decimal,Decimal,Decimal,Decimal)        |
| PX.Objects.PM | PMProjectBalanceRecord | get_Amount()   |
| PX.Objects.PM | PMProjectBalanceRecord | set_Amount(Nullable<Decimal>)  |
| PX.Objects.PM | PMProjectBalanceRecord | get_BudgetedCOAmount()   |
| PX.Objects.PM | PMProjectBalanceRecord | set_BudgetedCOAmount(Nullable<Decimal>)                                    |
| PX.Objects.PM | PMProjectBalanceRecord | get_RevisedAmount()  |
| PX.Objects.PM | PMProjectBalanceRecord | set_RevisedAmount(Nullable<Decimal>)                                       |

| Namespace     | Simple Name            | Name   |
|---------------|------------------------|--|
| PX.Objects.PM | PMProjectBalanceRecord | get_ActualAmount()                             |
| PX.Objects.PM | PMProjectBalanceRecord | set_ActualAmount(Nullable<Decimal>)            |
| PX.Objects.PM | PMProjectBalanceRecord | get_CommittedAmount()                          |
| PX.Objects.PM | PMProjectBalanceRecord | set_CommittedAmount(Nullable<Decimal>)         |
| PX.Objects.PM | PMProjectBalanceRecord | get_CommittedOpenAmount()                      |
| PX.Objects.PM | PMProjectBalanceRecord | set_CommittedOpenAmount(Nullable<Decimal>)     |
| PX.Objects.PM | PMProjectBalanceRecord | get_CommittedInvoicedAmount()                  |
| PX.Objects.PM | PMProjectBalanceRecord | set_CommittedInvoicedAmount(Nullable<Decimal>) |
| PX.Objects.PM | PMProjectBalanceRecord | get_OriginalCommittedAmount()                  |
| PX.Objects.PM | PMProjectBalanceRecord | set_OriginalCommittedAmount(Nullable<Decimal>) |
| PX.Objects.PM | PMProjectBalanceRecord | get_CommittedCOAmount()                        |
| PX.Objects.PM | PMProjectBalanceRecord | set_CommittedCOAmount(Nullable<Decimal>)       |
| PX.Objects.PM | TransactionInquiry     | PMTran_Amount_CacheAttached(PXCache)           |

| Namespace     | Simple Name        | Name   |
|---------------|--------------------|--|
| PX.Objects.PM | TransactionInquiry | PMTran_RowSelected(PXCache,PXRowSelectedEventArgs)   |
| PX.Objects.TX | TaxPluginDetail    | set_SortOrder(Int32)   |
| PX.Objects.TX | TaxAttribute       | .ctor(Type,Type,Type)  |
| PX.Objects.TX | TaxAttribute       | .ctor(Type,Type,Type,Type)   |
| PX.Objects.TX | TaxBaseAttribute   | PeriodUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.TX | TaxBaseAttribute   | .ctor(Type,Type,Type)  |
| PX.Objects.TX | TaxBaseAttribute   | .ctor(Type,Type,Type,Type)   |
| PX.Objects.TX | WhereTaxBase       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.TX | WhereAPPPDTaxable  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.TX | ManualVATAttribute | .ctor(Type,Type,Type)  |
| PX.Objects.TX | ManualVATAttribute | .ctor(Type,Type,Type,Type)   |
| PX.Objects.TX | ReportTaxReview    | get_FinPeriodRepository()  |
| PX.Objects.TX | ReportTaxProcess   | get_FinPeriodRepository()  |
| PX.Objects.TX | TaxAdjustmentEntry | get_FinPeriodRepository()  |
| PX.Objects.TX | TaxCalendar        | CreateAndAddToCache(PXCache,PXCache,Nullable<Int32>,Vendor,Nullable<Int32>)                                      |
| PX.Objects.TX | TaxCalendar        | Create(Nullable<Int32>,Vendor,Nullable<Int32>)   |
| PX.Objects.TX | TaxCalendar        | FillCalendarDataWhenLastOrganizationTaxYearDoesNotExist(Int32,Vendor,TaxCalendar+CreationParams)                 |
| PX.Objects.SO | SOInvoice          | get_CuryPaymentTotal()   |

| Namespace     | Simple Name                 | Name   |
|---------------|-----------------------------|--|
| PX.Objects.SO | SOInvoice                   | set_CuryPaymentTotal(Nullable<Decimal>)                  |
| PX.Objects.SO | SOInvoice                   | get_PaymentTotal()                                       |
| PX.Objects.SO | SOInvoice                   | set_PaymentTotal(Nullable<Decimal>)                      |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | get_PromptChoice()                                       |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | set_PromptChoice(String)                                 |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | get_AutoSelectLotSerialNumberLocation()                  |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | set_AutoSelectLotSerialNumberLocation(Nullable<Boolean>) |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | get_PromptLocation()                                     |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | set_PromptLocation(Nullable<Boolean>)                    |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | get_CarrierLabelPrintWithDeviceHub()                     |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | set_CarrierLabelPrintWithDeviceHub(Nullable<Boolean>)    |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | get_CarrierLabelDefinePrinterManually()                  |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | set_CarrierLabelDefinePrinterManually(Nullable<Boolean>) |
| PX.Objects.SO | SOPickPackShipUserSet<br>up | get_CarrierLabelPrinterName()                            |

| Namespace     | Simple Name                  | Name   |
|---------------|------------------------------|--|
| PX.Objects.SO | SOPickPackShipUserSetup      | set_CarrierLabelPrinterName(String)  |
| PX.Objects.SO | SOPickPackShipUserSetup      | get_ShipmentConfirmationPrintWithDeviceHub()   |
| PX.Objects.SO | SOPickPackShipUserSetup      | set_ShipmentConfirmationPrintWithDeviceHub(Nullable<Boolean>)  |
| PX.Objects.SO | SOPickPackShipUserSetup      | get_ShipmentConfirmationDefinePrinterManually()  |
| PX.Objects.SO | SOPickPackShipUserSetup      | set_ShipmentConfirmationDefinePrinterManually(Nullable<Boolean>)   |
| PX.Objects.SO | SOPickPackShipUserSetup      | get_ShipmentConfirmationPrinterName()  |
| PX.Objects.SO | SOPickPackShipUserSetup      | set_ShipmentConfirmationPrinterName(String)  |
| PX.Objects.SO | SOPickPackShipUserSetup      | op_Explicit(SOPickPackShipUserSetup)   |
| PX.Objects.SO | SOPickPackShipUserSetup      | op_Explicit(SOPickPackShipUserSetup)   |
| PX.Objects.SO | PK                           | Find(PXGraph,String,String,Nullable<Int32>)  |
| PX.Objects.SO | PK                           | Find(PXGraph,String,String,Int32,Int32)  |
| PX.Objects.SO | DateMinusDaysNotLessThenDate | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.SO | SOOpenPeriodAttribute        | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean)   |
| PX.Objects.SO | SOFinPeriodAttribute         | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean)   |

| Namespace     | Simple Name            | Name  |
|---------------|------------------------|---|
| PX.Objects.SO | LSARTran               | GetLinkedSOLine(ARTran)   |
| PX.Objects.SO | SOInvoiceEntry         | CaptureCCPayment(PXAdapter)   |
| PX.Objects.SO | SOInvoiceEntry         | AuthorizeCCPayment(PXAdapter)   |
| PX.Objects.SO | SOInvoiceEntry         | VoidCCPayment(PXAdapter)  |
| PX.Objects.SO | SOInvoiceEntry         | CreditCCPayment(PXAdapter)  |
| PX.Objects.SO | SOInvoiceEntry         | SOInvoice_RowSelecting(PXCache,PXRowSelectingEventArgs)   |
| PX.Objects.SO | SOInvoiceEntry         | InvoiceOrder(DateTime,PXResult<SOOrderShipment,SOOrder,CurrencyInfo,SOAddress,SOContact,SOOrderType>,Customer,DocumentList<ARInvoice,SOInvoice>)  |
| PX.Objects.SO | SOInvoiceEntry         | InvoiceOrder(DateTime,PXResult<SOOrderShipment,SOOrder,CurrencyInfo,SOAddress,SOContact,SOOrderType>,Customer,DocumentList<ARInvoice,SOInvoice>,PXQuickProcess+ActionFlow)                                |
| PX.Objects.SO | SOInvoiceEntry         | InvoiceOrder(DateTime,PXResult<SOOrderShipment,SOOrder,CurrencyInfo,SOAddress,SOContact,SOOrderType>,PXResultset<SOShipLine,SOLine>,Customer,DocumentList<ARInvoice,SOInvoice>)                           |
| PX.Objects.SO | SOInvoiceEntry         | InvoiceOrder(DateTime,PXResult<SOOrderShipment,SOOrder,CurrencyInfo,SOAddress,SOContact,SOOrderType>,PXResultset<SOShipLine,SOLine>,Customer,DocumentList<ARInvoice,SOInvoice>,PXQuickProcess+ActionFlow) |
| PX.Objects.SO | SOInvoiceEntry         | FindOrCreateInvoice(DateTime,PXResult<SOOrderShipment,SOOrder,CurrencyInfo,SOAddress,SOContact,SOOrderType>,DocumentList<ARInvoice,SOInvoice>)  |
| PX.Objects.SO | SOInvoiceEntry         | UpdateSOInvoiceState(IBqlTable,CCTranType)  |
| PX.Objects.SO | SOInvoiceEntry         | UpdateDocState(SOInvoice,CCTranType)  |
| PX.Objects.SO | SOOrderShipmentProcess | CompleteSOLinesAndSplits(ARRegister,List<PXResult<SOOrderShipment,SOOrder,SOOrderType>>)  |
| PX.Objects.SO | SOOrderEntry           | carrierRates()  |

| Namespace     | Simple Name  | Name   |
|---------------|--------------|--|
| PX.Objects.SO | SOOrderEntry | ShopRates(PXAdapter)   |
| PX.Objects.SO | SOOrderEntry | RefreshRates(PXAdapter)  |
| PX.Objects.SO | SOOrderEntry | RecalculatePackages(PXAdapter)                                 |
| PX.Objects.SO | SOOrderEntry | UpdateDocState(SOOrder,CCTranType)                             |
| PX.Objects.SO | SOOrderEntry | AuthorizeCCPayment(PXAdapter)                                  |
| PX.Objects.SO | SOOrderEntry | VoidCCPayment(PXAdapter)                                       |
| PX.Objects.SO | SOOrderEntry | CaptureCCPayment(PXAdapter)                                    |
| PX.Objects.SO | SOOrderEntry | CreditCCPayment(PXAdapter)                                     |
| PX.Objects.SO | SOOrderEntry | CreateCCPaymentMethodHF(PXAdapter)                             |
| PX.Objects.SO | SOOrderEntry | SyncCCPaymentMethods(PXAdapter)                                |
| PX.Objects.SO | SOOrderEntry | SOCarrierRate_RowUpdated(PXCache,PXRowUpdatedEventArgs)        |
| PX.Objects.SO | SOOrderEntry | SOCarrierRate_RowPersisting(PXCache,PXRowPersistingEventArgs)  |
| PX.Objects.SO | SOOrderEntry | BuildRateRequest(SOOrder)                                      |
| PX.Objects.SO | SOOrderEntry | BuildQuoteRequest(SOOrder,CarrierPlugin)                       |
| PX.Objects.SO | SOOrderEntry | BuildCarrierBoxes(List<SOPackageInfoEx>,Address,String,String) |
| PX.Objects.SO | SOOrderEntry | BuildCarrierPackage(SOPackageInfoEx,String)                    |
| PX.Objects.SO | SOOrderEntry | CalculatePackages(SOOrder,String)                              |
| PX.Objects.SO | SOOrderEntry | GetManualPackages(SOOrder)                                     |
| PX.Objects.SO | SOOrderEntry | CreatePackageEngine()  |

| Namespace     | Simple Name     | Name  |
|---------------|-----------------|---|
| PX.Objects.SO | SOOrderEntry    | RecalculatePackagesForOrder(SOOrder)  |
| PX.Objects.SO | SOOrderEntry    | UpdateSOOrderState(IBqITable,CCTranType)  |
| PX.Objects.SO | SOShipmentEntry | RecalculatePackages(PXAdapter)  |
| PX.Objects.SO | SOShipmentEntry | SOPackageDetail_Weight_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)                            |
| PX.Objects.SO | SOShipmentEntry | SOPackageDetail_Weight_FieldVerifying(PXCache,PXFieldVerifyingEventArgs)                        |
| PX.Objects.SO | SOShipmentEntry | SOPackageDetail_RowSelected(PXCache,PXRowSelectedEventArgs)                                     |
| PX.Objects.SO | SOShipmentEntry | PostShipment(INIssueEntry,SOShipment,DocumentList<INRegister>)                                  |
| PX.Objects.SO | SOShipmentEntry | PostShipment(INIssueEntry,PXResult<SOOrderShipment,SOOrder>,DocumentList<INRegister>)           |
| PX.Objects.SO | SOShipmentEntry | PostShipment(INIssueEntry,PXResult<SOOrderShipment,SOOrder>,DocumentList<INRegister>,ARInvoice) |
| PX.Objects.SO | SOShipmentEntry | CalculatePackages(SOShipment,SOPackageEngine+PackSet&)  |
| PX.Objects.SO | SOShipmentEntry | GetLabelFiles(PXResultset<SOPackageDetail>)   |
| PX.Objects.SO | SOShipmentEntry | BuildRequest(SOShipment)  |
| PX.Objects.SO | SOShipmentEntry | DeleteUnassignedSplits(SOShipLine,PXResultset<SOShipLineSplit>)                                 |
| PX.Objects.SO | SOShipmentEntry | GetPackages(SOShipment,Carrier,CarrierPlugin)   |
| PX.Objects.SO | SOShipmentEntry | BuildCarrierPackage(SOPackageDetail,CSBox,String)   |
| PX.Objects.SO | PackageDetail   | IsActive()  |
| PX.Objects.SO | PackageDetail   | SOPackageDetail_RowSelected(PXCache,PXRowSelectedEventArgs)                                     |
| PX.Objects.SO | PackageDetail   | SOPackageDetailSplit_RowInserted(PXCache,PXRowInsertedEventArgs)                                |
| PX.Objects.SO | PackageDetail   | SOPackageDetailSplit_RowUpdated(PXCache,PXRowUpdatedEventArgs)                                  |



| Namespace     | Simple Name   | Name   |
|---------------|---------------|--|
| PX.Objects.SO | PackageDetail | SOPackageDetailSplit_RowDeleted(PXCache,PXRowDeletedEventArgs)                     |
| PX.Objects.SO | PackageDetail | UpdateParentShipmentLine(PXCache,SOPackageDetailSplit,SOPackageDetailSplit)        |
| PX.Objects.SO | PackageDetail | UpdateShipmentLine(PXCache,SOShipLine,SOPackageDetailSplit,Decimal)                |
| PX.Objects.SO | PackageDetail | SOPackageDetailSplit_ShipmentLineNbr_FieldUpdated(PXCache,PXFieldUpdatedEventArgs) |
| PX.Objects.SO | PickPackShip  | PickPackInfo_RowSelected(PXCache,PXRowSelectedEventArgs)                           |
| PX.Objects.SO | PickPackShip  | SOShipLineSplitPick_LineNbr_CacheAttached(PXCache)                                 |
| PX.Objects.SO | PickPackShip  | SOShipLinePick_LineNbr_CacheAttached(PXCache)                                      |
| PX.Objects.SO | PickPackShip  | PickPackInfo_ShipmentNbr_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)             |
| PX.Objects.SO | PickPackShip  | EnsureUserSetupExists()  |
| PX.Objects.SO | PickPackShip  | scanLogs()   |
| PX.Objects.SO | PickPackShip  | splits()   |
| PX.Objects.SO | PickPackShip  | packages()   |
| PX.Objects.SO | PickPackShip  | packageSplits()  |
| PX.Objects.SO | PickPackShip  | Allocations()  |
| PX.Objects.SO | PickPackShip  | scan()   |
| PX.Objects.SO | PickPackShip  | ProcessShipmentNumber(String)  |
| PX.Objects.SO | PickPackShip  | ProcessCommands(String)  |
| PX.Objects.SO | PickPackShip  | ProcessWeight(String)  |
| PX.Objects.SO | PickPackShip  | ConvertKilogramToWeightUnit(Decimal,String)  |

| Namespace     | Simple Name  | Name  |
|---------------|--------------|---|
| PX.Objects.SO | PickPackShip | ClearScreen(Boolean)  |
| PX.Objects.SO | PickPackShip | ProcessLotSerialBarcode(String,Nullable<Int32>,Boolean,Nullable<Decimal>)               |
| PX.Objects.SO | PickPackShip | AutoSelectSplit(String,Nullable<Decimal>,String,String,Nullable<Int32>,Nullable<Int32>) |
| PX.Objects.SO | PickPackShip | InsertScanLog()   |
| PX.Objects.SO | PickPackShip | IsAutoSelectLotSerialNumber()   |
| PX.Objects.SO | PickPackShip | IsLocationRequired()  |
| PX.Objects.SO | PickPackShip | SetCurrentInventoryIDByItemBarcode(String,Boolean&)                                     |
| PX.Objects.SO | PickPackShip | SetScanState(String)  |
| PX.Objects.SO | PickPackShip | ProcessPick(Boolean,Nullable<Decimal>)  |
| PX.Objects.SO | PickPackShip | ProcessNewPackageCommand(String[],Boolean)  |
| PX.Objects.SO | PickPackShip | ProcessPackageCompleteCommand(Boolean)  |
| PX.Objects.SO | PickPackShip | ProcessAutoCalcWeight()   |
| PX.Objects.SO | PickPackShip | ProcessScaleWeight()  |
| PX.Objects.SO | PickPackShip | PromptForPackageWeight(Boolean)   |
| PX.Objects.SO | PickPackShip | CalculatePackageWeightFromItemsAndBoxConfiguration(Decimal&)                            |
| PX.Objects.SO | PickPackShip | SetCurrentPackageWeight(Decimal)  |
| PX.Objects.SO | PickPackShip | GetCurrentPackageDetailPick()   |
| PX.Objects.SO | PickPackShip | GetLotSerialClass(Nullable<Int32>)  |
| PX.Objects.SO | PickPackShip | GetLotSerialStatus(String)  |

| Namespace     | Simple Name  | Name   |
|---------------|--------------|--|
| PX.Objects.SO | PickPackShip | SetCurrentInventoryIDByLotSerial(INLotSerialStatus)  |
| PX.Objects.SO | PickPackShip | ValidateLotSerialStatus(String,INLotSerialStatus,INLotSerClass)                                      |
| PX.Objects.SO | PickPackShip | IsLotExpired(INLotSerialStatus)  |
| PX.Objects.SO | PickPackShip | AddPick(Nullable<Int32>,Nullable<Int32>,Nullable<Decimal>,Nullable<Int32>,String,Nullable<DateTime>) |
| PX.Objects.SO | PickPackShip | AddPickToCurrentLineSplits(Nullable<Int32>,String,Nullable<DateTime>,Decimal)                        |
| PX.Objects.SO | PickPackShip | InsertSplit(Decimal,Nullable<Int32>,String,Nullable<DateTime>)                                       |
| PX.Objects.SO | PickPackShip | GetTotalQuantityPickedForLotSerial(Nullable<Int32>,Nullable<Int32>,String)                           |
| PX.Objects.SO | PickPackShip | RemovePick(Nullable<Int32>,Nullable<Int32>,Nullable<Decimal>,Nullable<Int32>,String)                 |
| PX.Objects.SO | PickPackShip | confirm()  |
| PX.Objects.SO | PickPackShip | confirmAll()   |
| PX.Objects.SO | PickPackShip | ConfirmShipment(PickPackShip+ConfirmMode)  |
| PX.Objects.SO | PickPackShip | settings()   |
| PX.Objects.SO | PickPackShip | PreparePrintJobs(SOShipmentEntry)  |
| PX.Objects.SO | PickPackShip | IsConfirmationNeeded()   |
| PX.Objects.SO | PickPackShip | IsQuantityEnabled()  |
| PX.Objects.SO | PickPackShip | UpdateShipmentLinesWithPickResults(SOShipmentEntry)  |
| PX.Objects.SO | PickPackShip | UpdateShipmentPackages(SOShipmentEntry)  |
| PX.Objects.SO | PickPackShip | SOPackageDetailPick_RowDeleted(PXCache,PXRowDeletedEventArgs)  |
| PX.Objects.SO | PickPackShip | SOPackageDetailPick_RowSelected(PXCache,PXRowSelectedEventArgs)                                      |

| Namespace     | Simple Name   | Name   |
|---------------|---------------|--|
| PX.Objects.SO | PickPackShip  | SOPackageDetailPick_IsCurrent_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)            |
| PX.Objects.SO | PickPackShip  | SOShipLinePick_PickedQty_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)                 |
| PX.Objects.SO | PickPackShip  | SOPickPackShipUserSetup_PromptChoice_FieldSelecting(PXCache,PXFieldSelectingEventArgs) |
| PX.Objects.SO | PickPackShip  | SOPickPackShipUserSetup_PromptChoice_FieldUpdating(PXCache,PXFieldUpdatingEventArgs)   |
| PX.Objects.IN | PK            | Find(PXGraph,Int32)  |
| PX.Objects.IN | INTranSrc     | get_TransType()  |
| PX.Objects.IN | INTranSrc     | set_TransType(String)  |
| PX.Objects.IN | PK            | Find(PXGraph,String,String,Int32,Int32)  |
| PX.Objects.IN | INItemPlan    | set_IsTemporary(Boolean)   |
| PX.Objects.IN | INLotSerClass | get_LotSerNumVal()   |
| PX.Objects.IN | INLotSerClass | set_LotSerNumVal(String)   |
| PX.Objects.IN | INSite        | get_LockSitePICountEntry()   |
| PX.Objects.IN | INSite        | set_LockSitePICountEntry(Nullable<Boolean>)  |
| PX.Objects.IN | PK            | Find(PXGraph,String,Nullable<Int32>,Nullable<Int32>,Nullable<Int32>)                   |
| PX.Objects.IN | PIGenerator   | INPIStatusItem_InventoryID_CacheAttached(PXCache)                                      |
| PX.Objects.IN | PIGenerator   | INPIClassLocation_PIClassID_CacheAttached(PXCache)                                     |
| PX.Objects.IN | PIGenerator   | INPIClassLocation_LocationID_CacheAttached(PXCache)                                    |
| PX.Objects.IN | PIGenerator   | UpdateCommandByGenerationMethod(BqlCommand)  |
| PX.Objects.IN | PIGenerator   | LockInventory(PXGraph,Nullable<Int32>,Nullable<Int32>)                                 |

| Namespace     | Simple Name              | Name   |
|---------------|--------------------------|--|
| PX.Objects.IN | PIGenerator              | LockInventory(PXGraph,Nullable<Int32>,Nullable<Int32>,Boolean,HashSet<Nullable<Int32>>,HashSet<Nulla<br>ble<Int32>>)                             |
| PX.Objects.IN | PIGenerator              | PIGeneratorSettings_SiteID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.IN | INPIEntry                | PopulateBookQty(INPIDetail)  |
| PX.Objects.IN | INPIEntry                | UnlockInventory(Boolean)   |
| PX.Objects.IN | INPIEntry                | INPIDetail_UnitCost_FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)  |
| PX.Objects.IN | INPIEntry                | ValidateInventory(PXGraph,Nullable<Int32>,Nullable<Int32>)   |
| PX.Objects.IN | INPIEntry                | RecalcCostsForCostEntity(INPIDetail,List<INPIEntry+ProjectedTranRec>)  |
| PX.Objects.IN | INPIEntry                | RecalcCostsForCostEntity(Nullable<Int32>,Nullable<Int32>,Nullable<Int32>,Nullable<Int32>,String,INPIDeta<br>il,List<INPIEntry+ProjectedTranRec>) |
| PX.Objects.IN | INPIEntry                | RecalcDemandCost()   |
| PX.Objects.IN | INPIEntry                | RecalcDemandCost(List<INPIEntry+ProjectedTranRec>)   |
| PX.Objects.IN | INPIReview               | DoComplete(INPIHeader)   |
| PX.Objects.IN | INUpdateMCAssignmen<br>t | get_FinPeriodRepository()  |
| PX.Objects.IN | effectiveOnHand          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlComman<br>d+Selection)                             |
| PX.Objects.IN | QtyProcessIntFormula     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlComman<br>d+Selection)                             |
| PX.Objects.IN | InventoryTranSumEnq      | get_FinPeriodRepository()  |
| PX.Objects.IN | INReleaseProcess         | UpdatePOReceiptCost(INTran,INTranCost,InventoryItem)   |

| Namespace     | Simple Name                              | Name  |
|---------------|--|---|
| PX.Objects.IN | INReleaseProcess                         | UpdatePORceiptLine(INTran)  |
| PX.Objects.IN | INTransferEntry                          | INRegister_TransPeriodID_CacheAttached(PXCache)                                 |
| PX.Objects.IN | INOpenPeriodTransferAttribute            | .ctor()   |
| PX.Objects.IN | InTransferCalendarOrganizationIDProvider | set_SiteSpecification(CalendarOrganizationIDProvider+SourceSpecificationItem)   |
| PX.Objects.IN | InTransferCalendarOrganizationIDProvider | set_ToSiteSpecification(CalendarOrganizationIDProvider+SourceSpecificationItem) |
| PX.Objects.IN | InventoryTranByAcctEnq                   | get_FinPeriodRepository()   |
| PX.Objects.IN | InventoryTranDetEnq                      | get_FinPeriodRepository()   |
| PX.Objects.IN | InventoryTranHistEnq                     | get_FinPeriodRepository()   |
| PX.Objects.IN | InventoryTranHistEnq                     | AlterFilters()  |
| PX.Objects.IN | InventoryItem                            | get_LotSerNumSharedVal()  |
| PX.Objects.IN | InventoryItem                            | set_LotSerNumSharedVal(String)  |
| PX.Objects.IN | InventoryItem                            | get_LotSerNumShared()   |
| PX.Objects.IN | InventoryItem                            | set_LotSerNumShared(Nullable<Boolean>)  |
| PX.Objects.IN | InventoryItem                            | get_LotSerNumVal()  |
| PX.Objects.IN | InventoryItem                            | set_LotSerNumVal(String)  |

| Namespace                                 | Simple Name             | Name   |
|---|-------------------------|--|
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetNumberLength(PXCache,PXResult<InventoryItem,INLotSerClass>)   |
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetNextNumber(PXCache,PXResult<InventoryItem,INLotSerClass>)   |
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetNextFormat(PXCache,PXResult<InventoryItem,INLotSerClass>)   |
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetNextClassID(PXResult<InventoryItem,INLotSerClass>)  |
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetDisplayMask(PXCache,PXResult<InventoryItem,INLotSerClass>)  |
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetLSParts(PXCache,PXResult<InventoryItem,INLotSerClass>)  |
| PX.Objects.IN                             | INLotSerialNbrAttribute | GetNextSplit<TLSDetail>(PXCache,PXResult<InventoryItem,INLotSerClass>)   |
| PX.Objects.IN                             | INLotSerialNbrAttribute | CreateNumbers<TLSDetail>(PXCache,PXResult<InventoryItem,INLotSerClass>,INLotSerTrack+Mode,Boolean,Decimal)     |
| PX.Objects.IN                             | INOpenPeriodAttribute   | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean,FinPeriodSelectorAttribute+SelectionModesWithRestrictions) |
| PX.Objects.IN                             | InventoryItemMaint      | InventoryItem_LotSerNumSharedVal_CacheAttached(PXCache)  |
| PX.Objects.IN                             | InventoryItemMaint      | InventoryItem_LotSerNumShared_CacheAttached(PXCache)   |
| PX.Objects.IN                             | InventoryItemMaint      | InventoryItem_RowSelecting(PXCache,PXRowSelectingEventArgs)  |
| PX.Objects.IN                             | InventoryItemMaint      | InventoryItem_LotSerClassID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)                                      |
| PX.Objects.IN                             | InventoryItemMaint      | InventoryItem_LotSerNumVal_CommandPreparing(PXCache,PXCommandPreparingEventArgs)                               |
| PX.Objects.IN                             | InventoryItemMaint      | InventoryItem_LotSerNumVal_FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)                                 |
| PX.Objects.IN.Overrides.INDocumentRelease | INTranCostUpdate        | get_TransType()  |
| PX.Objects.IN.Overrides.INDocumentRelease | INTranCostUpdate        | set_TransType(String)  |

| Namespace                                 | Simple Name             | Name   |
|---|-------------------------|--|
| PX.Objects.IN.Overrides.INDocumentRelease | INTranSplitUpdate       | get_TranType()   |
| PX.Objects.IN.Overrides.INDocumentRelease | INTranSplitUpdate       | set_TranType(String)   |
| PX.Objects.FA                             | ProcessAssetFilter      | get_BranchID()   |
| PX.Objects.FA                             | ProcessAssetFilter      | set_BranchID(Nullable<Int32>)  |
| PX.Objects.FA                             | AssetGLTransactions     | get_FinPeriodRepository()  |
| PX.Objects.FA                             | AssetMaint              | get_FinPeriodRepository()  |
| PX.Objects.FA                             | AssetMaint              | fatransactions()   |
| PX.Objects.FA                             | BalanceFilter           | get_PeriodID()   |
| PX.Objects.FA                             | BalanceFilter           | set_PeriodID(String)   |
| PX.Objects.FA                             | RowExt                  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.FA                             | FABookPeriodIDAttribute | .ctor()  |
| PX.Objects.FA                             | FABookPeriodIDAttribute | .ctor(Type)  |
| PX.Objects.FA                             | FABookPeriodIDAttribute | .ctor(Type,Type)   |
| PX.Objects.FA                             | FABookPeriodIDAttribute | FieldVerifying(PXCache,PXFieldVerifyingEventArgs)  |
| PX.Objects.FA                             | FABookPeriodIDAttribute | FormatForError(String)   |



| Namespace     | Simple Name             | Name   |
|---------------|-------------------------|--|
| PX.Objects.FA | FABookPeriodIDAttribute | FormatPeriod(String)   |
| PX.Objects.FA | FABookPeriodIDAttribute | UnFormatPeriod(String)   |
| PX.Objects.FA | FABookPeriodIDAttribute | FABookPeriodFromDate(PXGraph,Nullable<DateTime>,Nullable<Int32>,Boolean) |
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodFromDate(PXGraph,Nullable<DateTime>,Nullable<Int32>,Boolean)       |
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodFromDate(PXGraph,Nullable<DateTime>,Nullable<Int32>)               |
| PX.Objects.FA | FABookPeriodIDAttribute | QuarterNumFromDate(PXGraph,Nullable<DateTime>,Nullable<Int32>)           |
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodNumFromDate(PXGraph,Nullable<DateTime>,Nullable<Int32>)            |
| PX.Objects.FA | FABookPeriodIDAttribute | GetBookCalendar(PXGraph,Nullable<Int32>)                                 |
| PX.Objects.FA | FABookPeriodIDAttribute | GetBookCalendar(PXGraph,FABook)  |
| PX.Objects.FA | FABookPeriodIDAttribute | GetBookPeriodsInYear(PXGraph,Nullable<Int32>)                            |
| PX.Objects.FA | FABookPeriodIDAttribute | GetBookYear(PXGraph,Nullable<Int32>,Int32)                               |
| PX.Objects.FA | FABookPeriodIDAttribute | GetBookPeriodsInYear(PXGraph,FABook,Int32)                               |
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodMinusPeriod(PXGraph,String,String,Nullable<Int32>)                 |

| Namespace     | Simple Name             | Name   |
|---------------|-------------------------|--|
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodPlusPeriod(PXGraph,String,Int32,Nullable<Int32>)   |
| PX.Objects.FA | FABookPeriodIDAttribute | NextPeriod(PXGraph,String,Nullable<Int32>)   |
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodStartDate(PXGraph,String,Nullable<Int32>)  |
| PX.Objects.FA | FABookPeriodIDAttribute | PeriodEndDate(PXGraph,String,Nullable<Int32>)  |
| PX.Objects.FA | GenerationPeriods       | BoundaryYears_YearTo_FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)   |
| PX.Objects.FA | GenerationPeriods       | GeneratePeriods(BoundaryYears,List<FABook>)  |
| PX.Objects.FA | GenerationPeriods       | FABook_RowSelected(PXCache,PXRowSelectedEventArgs)   |
| PX.Objects.FA | GenerationPeriods       | FABookPeriod_RowInserting(PXCache,PXRowInsertingEventArgs)   |
| PX.Objects.FA | GenerationPeriods       | GeneratePeriodsProc(BoundaryYears,List<FABook>)  |
| PX.Objects.FA | BoundaryYears           | get_YearTo()   |
| PX.Objects.FA | BoundaryYears           | set_YearTo(String)   |
| PX.Objects.FA | DeprCalcParameters      | Fill(FABookBalance,FABook,FADepreciationMethod,Nullable<DateTime>)   |
| PX.Objects.FA | DeprCalcParameters      | Fill(Int32,Nullable<Int32>,Boolean,Decimal,String,String,Int16,DateTime,Nullable<DateTime>,Nullable<DateTime>,FABook,FADepreciationMethod,String,String) |
| PX.Objects.FA | DeprCalcParameters      | Init(Int32,Nullable<Int32>,Boolean,Decimal,String,String,Int16,DateTime,Nullable<DateTime>,Nullable<DateTime>,FABook,FADepreciationMethod,String,String) |
| PX.Objects.FA | DeprCalcParameters      | SelectFromDatabase()   |
| PX.Objects.FA | FABook                  | set_BookID(Nullable<Int32>)  |

| Namespace                            | Simple Name             | Name  |
|--------------------------------------|-------------------------|---|
| PX.Objects.FA                        | FABook                  | set_BookCode(String)  |
| PX.Objects.FA                        | FABook                  | set_Description(String)   |
| PX.Objects.FA                        | FABook                  | get_FirstCalendarYear()   |
| PX.Objects.FA                        | FABook                  | set_FirstCalendarYear(String)   |
| PX.Objects.FA                        | FABook                  | get_LastCalendarYear()  |
| PX.Objects.FA                        | FABook                  | set_LastCalendarYear(String)  |
| PX.Objects.Extensions.ContactAddress | ContactAddressGraph     | DefaultRecords(Document,Contact,Address)  |
| PX.Objects.Extensions.ContactAddress | ContactAddressGraph     | IsContactAddressNoChanged(Contact,Address)  |
| PX.Objects.EP                        | WingmanUser             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                          |
| PX.Objects.EP                        | ExpenseClaimDetailEntry | EPExpenseClaimDetails_InventoryID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.EP                        | Approver                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                          |
| PX.Objects.EP                        | ExpenseClaimEntry       | EPExpenseClaimDetails_InventoryID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.EP                        | WrappedWhere            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)                          |
| PX.Objects.DR                        | ScheduleCreator         | .ctor(IDREntityStorage,ISubaccountProvider,IBusinessAccountProvider,IInventoryItemProvider,Func<Decimal,Decimal>,Nullable<Int32>,Boolean) |

| Namespace                     | Simple Name        | Name   |
|-------------------------------|--------------------|--|
| PX.Objects.DR                 | DRScheduleDetail   | get_FinPeriodID()  |
| PX.Objects.DR                 | DRScheduleDetail   | set_FinPeriodID(String)                                  |
| PX.Objects.DR                 | DRScheduleDetail   | get_ProjectID()  |
| PX.Objects.DR                 | DRScheduleDetail   | set_ProjectID(Nullable<Int32>)                           |
| PX.Objects.DR                 | DRScheduleDetail   | get_TaskID()   |
| PX.Objects.DR                 | DRScheduleDetail   | set_TaskID(Nullable<Int32>)                              |
| PX.Objects.DR                 | DraftScheduleMaint | get_FinPeriodRepository()                                |
| PX.Objects.DR                 | ScheduleMaint      | get_FinPeriodRepository()                                |
| PX.Objects.DR                 | ScheduleMaint      | get_FinPeriodUtils()                                     |
| PX.Objects.DR                 | DRRecognition      | get_FinPeriodRepository()                                |
| PX.Objects.DR                 | DRTranKey          | .ctor(Nullable<Int32>,Nullable<Int32>,Nullable<Int32>)   |
| PX.Objects.DR                 | ScheduleTransInq   | get_FinPeriodRepository()                                |
| PX.Objects.DR.D<br>descriptor | IDREntityStorage   | GetDeferralTransactions(Nullable<Int32>,Nullable<Int32>) |
| PX.Objects.CT                 | Contract           | get_Asset()  |
| PX.Objects.CT                 | Contract           | set_Asset(Nullable<Decimal>)                             |
| PX.Objects.CT                 | Contract           | get_Liability()  |
| PX.Objects.CT                 | Contract           | set_Liability(Nullable<Decimal>)                         |
| PX.Objects.CT                 | Contract           | get_Income()   |

| Namespace     | Simple Name                        | Name   |
|---------------|------------------------------------|--|
| PX.Objects.CT | Contract                           | set_Income(Nullable<Decimal>)  |
| PX.Objects.CT | Contract                           | get_Expense()  |
| PX.Objects.CT | Contract                           | set_Expense(Nullable<Decimal>)   |
| PX.Objects.CS | AddressValidatorPlugin<br>Detail   | set_SortOrder(Int32)   |
| PX.Objects.CS | BuildingMaint                      | Branch_RowPersisting(PXCache,PXRowPersistingEventArgs)   |
| PX.Objects.CS | FeaturesMaint                      | _(Events+FieldUpdating<FeaturesSet+centralizedPeriodsManagement>)  |
| PX.Objects.CS | PK                                 | Find(PXGraph,Int32)  |
| PX.Objects.CS | TimeZoneNow                        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.CS | Left                               | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.CS | Left4                              | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.CS | DefaultValue                       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.CS | NoSort                             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.GL | FinPeriodIDFormattingA<br>ttribute | get_SourceFieldType()  |
| PX.Objects.GL | FinPeriodIDFormattingA<br>ttribute | set_SourceFieldType(Type)  |

| Namespace     | Simple Name                    | Name   |
|---------------|--------------------------------|--|
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_SearchType()   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_SearchType(Type)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_SourceType()   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_SourceType(Type)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_SearchTypeRestrictedByOrganization()   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_SearchTypeRestrictedByOrganization(Type)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_DefaultingQueryParametersDelegate()  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_DefaultingQueryParametersDelegate(Func<Object[], Nullable<DateTime>, Nullable<Int32>, Object[]>) |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_BranchSourceType()   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_BranchSourceType(Type)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_BranchSourceFormulaType()  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_BranchSourceFormulaType(Type)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_OrganizationSourceType()   |

| Namespace     | Simple Name                    | Name   |
|---------------|--------------------------------|--|
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_OrganizationSourceType(Type)                             |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_UseMasterCalendarSourceType()                            |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_UseMasterCalendarSourceType(Type)                        |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_DefaultType()  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_DefaultType(Type)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_DefaultTypeRestrictedByOrganization()                    |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_DefaultTypeRestrictedByOrganization(Type)                |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_RedefineOrRevalidateOnOrganizationSourceUpdated()        |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_RedefineOrRevalidateOnOrganizationSourceUpdated(Boolean) |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_CheckFinPeriodExistenceOnSource()                        |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_CheckFinPeriodExistenceOnSource(Boolean)                 |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_FilterByOrganizationID()                                 |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_FilterByOrganizationID(Boolean)                          |

| Namespace     | Simple Name                    | Name   |
|---------------|--------------------------------|--|
| PX.Objects.GL | FinPeriodIDFormattingAttribute | get_CalendarOrganizationIDProvider()   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | set_CalendarOrganizationIDProvider(ICalendarOrganizationIDProvider)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | .ctor(Type,Type)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | .ctor(Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,Boolean,Type[],ICalendarOrganizationIDProvider)                       |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | DateBranchRowUpdating(PXCache,PXRowUpdatingEventArgs)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | Validate(ICalendarOrganizationIDProvider,PXCache,Object,Func<Nullable<Int32>,Nullable<Boolean>>)                                       |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | SourceFieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | RedefaultPeriodID(PXCache,Object)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | BranchRowUpdated(PXCache,PXRowUpdatedEventArgs)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | CalendarOrganizationIDSourceFieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | RowPersisting(PXCache,PXRowPersistingEventArgs)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | GetPeriod(PXGraph,Type,Nullable<DateTime>,Nullable<Int32>,Object[],Func<Object[],Nullable<DateTime>,Nullable<Int32>,Object[]>,Boolean) |



| Namespace     | Simple Name                    | Name   |
|---------------|--------------------------------|--|
| PX.Objects.GL | FinPeriodIDFormattingAttribute | GetDate(PXCache, Object)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | GetQueryWithRestrictionByOrganization(Type)  |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | CheckFinPeriodExists(PXCache, Object, Nullable<DateTime>, Nullable<Int32>)                           |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | GetNewValueByIncomig(PXCache, Object, String, Boolean)   |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | SetUseMasterCalendarValue(PXCache, Object)   |
| PX.Objects.GL | PeriodIDAttribute              | get_SearchTypeRestrictedByOrganization()   |
| PX.Objects.GL | PeriodIDAttribute              | set_SearchTypeRestrictedByOrganization(Type)   |
| PX.Objects.GL | PeriodIDAttribute              | get_DefaultTypeRestrictedByOrganization()  |
| PX.Objects.GL | PeriodIDAttribute              | set_DefaultTypeRestrictedByOrganization(Type)  |
| PX.Objects.GL | PeriodIDAttribute              | get_DefaultingQueryParametersDelegate()  |
| PX.Objects.GL | PeriodIDAttribute              | set_DefaultingQueryParametersDelegate(Func<Object[], Nullable<DateTime>, Nullable<Int32>, Object[]>) |
| PX.Objects.GL | PeriodIDAttribute              | get_BranchSourceType()   |
| PX.Objects.GL | PeriodIDAttribute              | set_BranchSourceType(Type)   |
| PX.Objects.GL | PeriodIDAttribute              | get_OrganizationSourceType()   |
| PX.Objects.GL | PeriodIDAttribute              | set_OrganizationSourceType(Type)   |
| PX.Objects.GL | PeriodIDAttribute              | get_UseMasterCalendarSourceType()  |

| Namespace     | Simple Name                | Name   |
|---------------|----------------------------|--|
| PX.Objects.GL | PeriodIDAttribute          | set_UseMasterCalendarSourceType(Type)  |
| PX.Objects.GL | PeriodIDAttribute          | .ctor()  |
| PX.Objects.GL | PeriodIDAttribute          | .ctor(Type,Type)   |
| PX.Objects.GL | PeriodIDAttribute          | .ctor(Type,Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,Boolean,Type[])  |
| PX.Objects.GL | PeriodIDAttribute          | CreateFormattingAttribute(Type,Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,Boolean,Type[], ICalendarOrganizationIDProvider)                             |
| PX.Objects.GL | PeriodIDAttribute          | GetFinPeriodIDFormattingAttribute()  |
| PX.Objects.GL | FinPeriodIDAttribute       | .ctor()  |
| PX.Objects.GL | FinPeriodIDAttribute       | .ctor(Type)  |
| PX.Objects.GL | FinPeriodIDAttribute       | .ctor(Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,Type[])   |
| PX.Objects.GL | FinPeriodIDAttribute       | FormatForError(String)   |
| PX.Objects.GL | FinPeriodIDAttribute       | FormatForDisplay(String)   |
| PX.Objects.GL | FinPeriodIDAttribute       | UnFormatPeriod(String)   |
| PX.Objects.GL | FinPeriodIDAttribute       | FinPeriodEqual(String,String,FinPeriodIDAttribute+FinPeriodComparison)   |
| PX.Objects.GL | FinPeriodSelectorAttribute | .ctor(Type,Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,Boolean,Boolean,Boolean,FinPeriodSelectorAttribute+SelectionModesWithRestrictions,Type[],Type[]) |
| PX.Objects.GL | OpenPeriodAttribute        | get_RaiseErrorOnInactiveOrLockedPeriod()   |
| PX.Objects.GL | OpenPeriodAttribute        | set_RaiseErrorOnInactiveOrLockedPeriod(Boolean)  |
| PX.Objects.GL | OpenPeriodAttribute        | .ctor(Type,Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,Boolean,Boolean,Boolean,FinPeriodSelectorAttribute+SelectionModesWithRestrictions,Type[])        |

| Namespace     | Simple Name                  | Name  |
|---------------|------------------------------|---|
| PX.Objects.GL | OpenPeriodAttribute          | GetFields(PXCache, Object)  |
| PX.Objects.GL | ClosedPeriodAttribute        | .ctor(Type, Type, Type, Type, Type, Type, Type, Boolean)                  |
| PX.Objects.GL | AnyPeriodFilterableAttribute | .ctor(Type, Type, Type, Type, Type, Type, Type, Boolean, Boolean, Type[]) |
| PX.Objects.GL | BranchAttribute              | .ctor(Type)   |
| PX.Objects.GL | BranchAttribute              | .ctor(Type, Type)   |
| PX.Objects.GL | BranchAttribute              | .ctor()   |
| PX.Objects.GL | BranchAttribute              | .ctor(Boolean)  |
| PX.Objects.GL | BranchBaseAttribute          | .ctor(Type, Boolean, Boolean)   |
| PX.Objects.GL | BranchBaseAttribute          | .ctor(Type, Type, Boolean)  |
| PX.Objects.GL | BranchBaseAttribute          | .ctor(Boolean)  |
| PX.Objects.GL | OrganizationFinPeriodMaint   | orgFinYear()  |
| PX.Objects.GL | GLBudgetLineIdx              | .ctor(IEnumerable<GLBudgetLine>)  |
| PX.Objects.GL | GLBudgetLineIdx              | Add(IEnumerable<GLBudgetLine>)  |
| PX.Objects.GL | GLTranDoc                    | get_AccountBranchID()   |
| PX.Objects.GL | GLTranDoc                    | set_AccountBranchID(Nullable<Int32>)                                      |
| PX.Objects.GL | GLConsolReadMaint            | get_FinPeriodRepository()   |

| Namespace         | Simple Name             | Name   |
|-------------------|-------------------------|--|
| PX.Objects.GL     | AccountHistoryBySubEnq  | get_FinPeriodRepository()  |
| PX.Objects.GL     | AccountHistoryByYearEnq | get_FinPeriodRepository()  |
| PX.Objects.GL     | AccountHistoryEnq       | get_FinPeriodRepository()  |
| PX.Objects.GL     | AccountByPeriodEnq      | get_FinPeriodRepository()  |
| PX.Objects.GL     | AccountByPeriodEnq      | GLTranR_FinPeriodID_CacheAttached(PXCache)   |
| PX.Objects.GL     | AllocationMaint         | get_FinPeriodRepository()  |
| PX.Objects.GL     | JournalEntry            | get_FinPeriodRepository()  |
| PX.Objects.GL     | JournalEntry            | get_FinPeriodUtils()   |
| PX.Objects.GL     | JournalEntry            | Batch_FinPeriodID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.GL     | PostGraph               | get_FinPeriodRepository()  |
| PX.Objects.GL     | MasterFinPeriodMaint    | CheckParametersOfCalendarGeneration(Int32,Int32,Int32,Int32)   |
| PX.Objects.GL     | MasterFinPeriodMaint    | GenerateMasterCalendar(Int32,Int32,Int32,Int32)  |
| PX.Objects.GL     | MasterFinPeriodMaint    | FillCurrentYearWithPeriods(String)   |
| PX.Objects.GL     | MasterFinPeriodMaint    | generateYears(PXAdapter)   |
| PX.Objects.GL     | IFinPeriod              | get_OrganizationID()   |
| PX.Objects.GL     | IFinPeriod              | set_OrganizationID(Nullable<Int32>)  |
| PX.Objects.GL.BQL | CalendarRestriction     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |

| Namespace                 | Simple Name                        | Name   |
|---------------------------|------------------------------------|--|
| PX.Objects.GL.B<br>QL     | ExistsJournalVoucher               | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)   |
| PX.Objects.GL.A ttributes | BranchOfOrganizationA<br>ttribute  | .ctor(Type,Boolean,Type)   |
| PX.Objects.GL.A ttributes | BranchOfOrganizationA<br>ttribute  | .ctor(Type,Boolean,Boolean,Type)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | GetSourcesSpecification(PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | get_UseMasterCalendarSourceType()  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | set_UseMasterCalendarSourceType(Type)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | get_UseMasterOrganizationIDByDefault()   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | set_UseMasterOrganizationIDByDefault(Boolean)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | GetCalendarOrganizationID(Object[],Boolean,Boolean)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | BuildOrganizationIDsValuesCollection(PXGraph,PXCache,Object,Func<PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem,CalendarOrganizationIDProvider+SourceValuesCollectionItem>) |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | GetEvaluatedOrganizationIDsValues(PXGraph,PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID<br>Provider | GetBasisOrganizationIDsValues(PXGraph,PXCache,Object)  |

| Namespace                 | Simple Name                     | Name  |
|---------------------------|---------------------------------|---|
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetOrganizationIDsValues(PXGraph,PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetEvaluatedPrimaryOrganizationIDsValuesItem(PXGraph,PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetPrimaryOrganizationIDsValuesItem(PXGraph,PXCache,Object)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetOrganizationIDsValueFromField(PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem) |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetBranchIDsValueFromField(PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem)       |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetBranchIDsValuesFromField(PXGraph,PXCache,Object)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | get_SourcesSpecification()  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | set_SourcesSpecification(CalendarOrganizationIDProvider+SourcesSpecificationCollection)                         |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | get_UseMasterCalendarSourceType()   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | set_UseMasterCalendarSourceType(Type)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | get_UseMasterOrganizationIDByDefault()  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | set_UseMasterOrganizationIDByDefault(Boolean)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | get_PrimarySourceSpecification()  |

| Namespace                 | Simple Name                     | Name   |
|---------------------------|---------------------------------|--|
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | set_PrimarySourceSpecification(CalendarOrganizationIDProvider+SourceSpecificationItem)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | .ctor(Type,Type,Type,Type,Boolean,Type[])  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetSourcesSpecification(PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetCalendarOrganizationID(Object[],Boolean,Boolean)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | BuildOrganizationIDsValuesCollection(PXGraph,PXCache,Object,Func<PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem,CalendarOrganizationIDProvider+SourceValuesCollectionItem>) |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetEvaluatedOrganizationIDsValues(PXGraph,PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetBasisOrganizationIDsValues(PXGraph,PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetOrganizationIDsValues(PXGraph,PXCache,Object)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetEvaluatedPrimaryOrganizationIDsValuesItem(PXGraph,PXCache,Object)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | GetPrimaryOrganizationIDsValuesItem(PXGraph,PXCache,Object)  |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | EvaluateOrganizationIDsValuesItem(PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem)   |
| PX.Objects.GL.D escriptor | CalendarOrganizationID Provider | EvaluateOrganizationIDsValuesItem(CalendarOrganizationIDProvider+SourceValuesCollectionItem)   |

| Namespace                                  | Simple Name                       | Name  |
|--|-----------------------------------|---|
| PX.Objects.GL.D escriptor                  | CalendarOrganizationID Provider   | GetOrganizationIDsValueFromField(PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem)                     |
| PX.Objects.GL.D escriptor                  | CalendarOrganizationID Provider   | GetBranchIDsValueFromField(PXGraph,PXCache,Object,CalendarOrganizationIDProvider+SourceSpecificationItem)                           |
| PX.Objects.GL.D escriptor                  | CalendarOrganizationID Provider   | GetBranchIDsValuesFromField(PXGraph,PXCache,Object)   |
| PX.Objects.GL.D escriptor                  | CalendarOrganizationID Provider   | GetSourceCache(PXGraph,PXCache,Type)  |
| PX.Objects.GL.D escriptor                  | CalendarOrganizationID Provider   | GetSourceRow(PXCache,Object)  |
| PX.Objects.GL.D escriptor                  | CalendarOrganizationID Provider   | IsIDsUndefined(List<Nullable<Int32>>)   |
| PX.Objects.GL.D escriptor                  | GenericFinPeriodSelectorAttribute | get_SourceOrganizationIDProvider()  |
| PX.Objects.GL.D escriptor                  | GenericFinPeriodSelectorAttribute | set_SourceOrganizationIDProvider(ICalendarOrganizationIDProvider)   |
| PX.Objects.GL.D escriptor                  | GenericFinPeriodSelectorAttribute | .ctor(Type,ICalendarOrganizationIDProvider,Boolean,Boolean,Boolean,FinPeriodSelectorAttribute+SelectionModeWithRestrictions,Type[]) |
| PX.Objects.GL.R eclassification.Processing | TransGroupKey                     | get_FinPeriodID()   |
| PX.Objects.GL.R eclassification.Processing | TransGroupKey                     | set_FinPeriodID(String)   |
| PX.Objects.GL.R eclassification.C          | ReclassGraphState                 | get_EditingBatchFinPeriodID()   |



| Namespace                             | Simple Name                   | Name   |
|---------------------------------------|-------------------------------|--|
| ommon                                 |                               |  |
| PX.Objects.GL.Reclassification.Common | ReclassGraphState             | set_EditingBatchFinPeriodID(String)  |
| PX.Objects.GL.Reclassification.Util   | ReclassifyTransactionsProcess | get_FinPeriodRepository()  |
| PX.Objects.GL.FinPeriods              | FinPeriodUtils                | FinPeriodEqual(String,String,FinPeriodIDAttribute+FinPeriodComparison)   |
| PX.Objects.GL.FinPeriods              | FinPeriodRepository           | FindFirstPeriod(Nullable<Int32>)   |
| PX.Objects.GL.FinPeriods              | FinPeriodRepository           | FindLastPeriod(Nullable<Int32>)  |
| PX.Objects.GL.FinPeriods              | IFinPeriodRepository          | FindLastPeriod(Nullable<Int32>)  |
| PX.Objects.GL.FinPeriods              | IFinPeriodRepository          | FindFirstPeriod(Nullable<Int32>)   |
| PX.Objects.CR                         | WhereEqualNotNull             | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.CR                         | CRSetup                       | get_ShowAuthorForCaseEmail()   |
| PX.Objects.CR                         | CRSetup                       | set_ShowAuthorForCaseEmail(Nullable<Boolean>)  |
| PX.Objects.CR                         | Minutes                       | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |

| Namespace                    | Simple Name                   | Name   |
|------------------------------|-------------------------------|--|
| PX.Objects.CR                | Round30Minutes                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.Common            | WhereFinPeriodInRange         | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.Common            | WhereDateInRange              | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.Common            | IsTableEmpty                  | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.Common.Attributes | DeprecatedProcessingAttribute | FieldVerifying(PXCache,PXFieldVerifyingEventArgs)  |
| PX.Objects.Common.Bql        | EqualToOrganizationOfBranch   | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.Common.Bql        | SameOrganizationBranch        | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.CM                | RevalueAccountsBase           | get_FinPeriodRepository()  |
| PX.Objects.CM                | RevalueAccountsBase           | get_FinPeriodUtils()   |
| PX.Objects.CM                | TranslationProcess            | get_FinPeriodRepository()  |
| PX.Objects.CM                | TranslationProcess            | get_FinPeriodUtils()   |
| PX.Objects.CM                | TranslationHistoryMaint       | get_FinPeriodRepository()  |
| PX.Objects.CM                | TranslationHistoryMaint       | get_FinPeriodUtils()   |
| PX.Objects.CA                | CAAPAROpenPeriodAttribute     | .ctor(Type,Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean)   |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.CA | CAOpenPeriodAttribute | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean) |
| PX.Objects.CA | CashFlowFilter        | set_AllCashAccounts(Boolean)                         |
| PX.Objects.CA | CABatch               | get_WorkgroupID()                                    |
| PX.Objects.CA | CABatch               | set_WorkgroupID(Nullable<Int32>)                     |
| PX.Objects.CA | CASplitExt            | get_Selected()                                       |
| PX.Objects.CA | CASplitExt            | set_Selected(Nullable<Boolean>)                      |
| PX.Objects.CA | CASplitExt            | get_AdjTranType()                                    |
| PX.Objects.CA | CASplitExt            | set_AdjTranType(String)                              |
| PX.Objects.CA | CASplitExt            | get_AdjRefNbr()                                      |
| PX.Objects.CA | CASplitExt            | set_AdjRefNbr(String)                                |
| PX.Objects.CA | CASplitExt            | get_LineNbr()  |
| PX.Objects.CA | CASplitExt            | set_LineNbr(Nullable<Int32>)                         |
| PX.Objects.CA | CASplitExt            | get_ExtRefNbr()                                      |
| PX.Objects.CA | CASplitExt            | set_ExtRefNbr(String)                                |
| PX.Objects.CA | CASplitExt            | get_CashAccountID()                                  |
| PX.Objects.CA | CASplitExt            | set_CashAccountID(Nullable<Int32>)                   |
| PX.Objects.CA | CASplitExt            | get_TrnDate()  |
| PX.Objects.CA | CASplitExt            | set_TrnDate(Nullable<DateTime>)                      |
| PX.Objects.CA | CASplitExt            | get_CuryID()   |

| Namespace     | Simple Name | Name                                      |
|---------------|-------------|---|
| PX.Objects.CA | CASplitExt  | set_CuryID(String)                        |
| PX.Objects.CA | CASplitExt  | get_DrCr()                                |
| PX.Objects.CA | CASplitExt  | set_DrCr(String)                          |
| PX.Objects.CA | CASplitExt  | get_TransPeriodID()                       |
| PX.Objects.CA | CASplitExt  | set_TransPeriodID(String)                 |
| PX.Objects.CA | CASplitExt  | get_FinPeriodID()                         |
| PX.Objects.CA | CASplitExt  | set_FinPeriodID(String)                   |
| PX.Objects.CA | CASplitExt  | get_Released()                            |
| PX.Objects.CA | CASplitExt  | set_Released(Nullable<Boolean>)           |
| PX.Objects.CA | CASplitExt  | get_AccountID()                           |
| PX.Objects.CA | CASplitExt  | set_AccountID(Nullable<Int32>)            |
| PX.Objects.CA | CASplitExt  | get_SubID()                               |
| PX.Objects.CA | CASplitExt  | set_SubID(Nullable<Int32>)                |
| PX.Objects.CA | CASplitExt  | get_ReclassCashAccountID()                |
| PX.Objects.CA | CASplitExt  | set_ReclassCashAccountID(Nullable<Int32>) |
| PX.Objects.CA | CASplitExt  | get_TransDesc()                           |
| PX.Objects.CA | CASplitExt  | set_TransDesc(String)                     |
| PX.Objects.CA | CASplitExt  | get_CuryInfoID()                          |
| PX.Objects.CA | CASplitExt  | set_CuryInfoID(Nullable<Int64>)           |

| Namespace     | Simple Name | Name                               |
|---------------|-------------|------------------------------------|
| PX.Objects.CA | CASplitExt  | get_CuryTranAmt()                  |
| PX.Objects.CA | CASplitExt  | set_CuryTranAmt(Nullable<Decimal>) |
| PX.Objects.CA | CASplitExt  | get_TransAmt()                     |
| PX.Objects.CA | CASplitExt  | set_TransAmt(Nullable<Decimal>)    |
| PX.Objects.CA | CASplitExt  | get_OrigModule()                   |
| PX.Objects.CA | CASplitExt  | set_OrigModule(String)             |
| PX.Objects.CA | CASplitExt  | get_ReferenceID()                  |
| PX.Objects.CA | CASplitExt  | set_ReferenceID(Nullable<Int32>)   |
| PX.Objects.CA | CASplitExt  | get_LocationID()                   |
| PX.Objects.CA | CASplitExt  | set_LocationID(Nullable<Int32>)    |
| PX.Objects.CA | CASplitExt  | get_PaymentMethodID()              |
| PX.Objects.CA | CASplitExt  | set_PaymentMethodID(String)        |
| PX.Objects.CA | CASplitExt  | get_PMInstanceID()                 |
| PX.Objects.CA | CASplitExt  | set_PMInstanceID(Nullable<Int32>)  |
| PX.Objects.CA | CASplitExt  | get_TransID()                      |
| PX.Objects.CA | CASplitExt  | set_TransID(Nullable<Int64>)       |
| PX.Objects.CA | CASplitExt  | get_RefAccountID()                 |
| PX.Objects.CA | CASplitExt  | set_RefAccountID(Nullable<Int32>)  |
| PX.Objects.CA | CASplitExt  | get_ChildTranID()                  |

| Namespace     | Simple Name            | Name  |
|---------------|------------------------|---|
| PX.Objects.CA | CASplitExt             | set_ChildTranID(Nullable<Int64>)              |
| PX.Objects.CA | CASplitExt             | get_ChildAccountID()                          |
| PX.Objects.CA | CASplitExt             | set_ChildAccountID(Nullable<Int32>)           |
| PX.Objects.CA | CASplitExt             | get_ChildOrigModule()                         |
| PX.Objects.CA | CASplitExt             | set_ChildOrigModule(String)                   |
| PX.Objects.CA | CASplitExt             | get_ChildOrigTranType()                       |
| PX.Objects.CA | CASplitExt             | set_ChildOrigTranType(String)                 |
| PX.Objects.CA | CASplitExt             | get_ChildOrigRefNbr()                         |
| PX.Objects.CA | CASplitExt             | set_ChildOrigRefNbr(String)                   |
| PX.Objects.CA | CashTranIDAttribute    | get_IsMigrationModeEnabledSetupField()        |
| PX.Objects.CA | CashTranIDAttribute    | set_IsMigrationModeEnabledSetupField(Type)    |
| PX.Objects.CA | CashTranIDAttribute    | get_IsMigrationModeEnabled()                  |
| PX.Objects.CA | CashTranIDAttribute    | set_IsMigrationModeEnabled(Nullable<Boolean>) |
| PX.Objects.CA | CATaxAttribute         | .ctor(Type,Type,Type)                         |
| PX.Objects.CA | CATaxAttribute         | .ctor(Type,Type,Type,Type)                    |
| PX.Objects.CA | CARecon                | get_LineCntr()                                |
| PX.Objects.CA | CARecon                | set_LineCntr(Nullable<Int32>)                 |
| PX.Objects.CA | CAReleaseProcess       | WriteDataIntegrityLog(String)                 |
| PX.Objects.AR | ARCashSaleTaxAttribute | .ctor(Type,Type,Type)                         |

| Namespace     | Simple Name             | Name   |
|---------------|-------------------------|--|
| PX.Objects.AR | RetainageOptions        | get_FinPeriodID()  |
| PX.Objects.AR | RetainageOptions        | set_FinPeriodID(String)                                  |
| PX.Objects.AR | PendingPPDCreditMemoApp | set_Index(Int32)   |
| PX.Objects.AR | ARCashSaleEntry         | ParentFieldUpdated(PXCache,PXRowUpdatedEventArgs)        |
| PX.Objects.AR | ARCashSaleEntry         | ARPaymentChargeTran_TransPeriodID_CacheAttached(PXCache) |
| PX.Objects.AR | ARCashSaleEntry         | CaptureCCPayment(PXAdapter)                              |
| PX.Objects.AR | ARCashSaleEntry         | UpdateCashSale(IBqlTable)                                |
| PX.Objects.AR | ARCashSaleEntry         | AuthorizeCCPayment(PXAdapter)                            |
| PX.Objects.AR | ARCashSaleEntry         | VoidCCPayment(PXAdapter)                                 |
| PX.Objects.AR | ARCashSaleEntry         | CreditCCPayment(PXAdapter)                               |
| PX.Objects.AR | ARDocumentEnq           | get_FinPeriodRepository()                                |
| PX.Objects.AR | ARDocumentFilter        | get_ByFinancialPeriod()                                  |
| PX.Objects.AR | ARDocumentFilter        | set_ByFinancialPeriod(Nullable<Boolean>)                 |
| PX.Objects.AR | ARCustomerBalanceEnq    | get_FinPeriodRepository()                                |
| PX.Objects.AR | ARHistoryFilter         | get_ByFinancialPeriod()                                  |
| PX.Objects.AR | ARHistoryFilter         | set_ByFinancialPeriod(Nullable<Boolean>)                 |
| PX.Objects.AR | ARReleaseProcess        | get_FinPeriodRepository()                                |
| PX.Objects.AR | ARReleaseProcess        | get_FinPeriodUtils()                                     |

| Namespace     | Simple Name                     | Name   |
|---------------|---------------------------------|--|
| PX.Objects.AR | ARReleaseProcess                | ARPayment_AdjFinPeriodID_CacheAttached(PXCache)        |
| PX.Objects.AR | ARReleaseProcess                | ARPayment_AdjTranPeriodID_CacheAttached(PXCache)       |
| PX.Objects.AR | ARReleaseProcess                | RestoreAmountToInvoice(ARTran,Decimal,Nullable<Int32>) |
| PX.Objects.AR | ARPaymentEntry                  | get_FinPeriodRepository()                              |
| PX.Objects.AR | ARPaymentEntry                  | get_FinPeriodUtils()                                   |
| PX.Objects.AR | ARPaymentEntry                  | UpdateARPaymentAndSetWarning(IBqlTable)                |
| PX.Objects.AR | ARPaymentEntry                  | UpdateARPayment(IBqlTable)                             |
| PX.Objects.AR | ARPaymentEntry                  | CaptureCCPayment(PXAdapter)                            |
| PX.Objects.AR | ARPaymentEntry                  | AuthorizeCCPayment(PXAdapter)                          |
| PX.Objects.AR | ARPaymentEntry                  | VoidCCPayment(PXAdapter)                               |
| PX.Objects.AR | ARPaymentEntry                  | CreditCCPayment(PXAdapter)                             |
| PX.Objects.AR | ARPaymentEntry                  | RecordCCPayment(PXAdapter)                             |
| PX.Objects.AR | ARPaymentEntry                  | CaptureOnlyCCPayment(PXAdapter)                        |
| PX.Objects.AR | ARPaymentEntry                  | clearCCInfo(PXGraph,String)                            |
| PX.Objects.AR | ARPaymentEntry                  | initAuthCCInfo(PXGraph,String)                         |
| PX.Objects.AR | ARPaymentEntry                  | ParentFieldUpdated(PXCache,PXRowUpdatedEventArgs)      |
| PX.Objects.AR | StatementCycleProcess<br>BO     | get_FinPeriodRepository()                              |
| PX.Objects.AR | ARSmallBalanceWriteOf<br>fEntry | ARAdjust_AdjgFinPeriodID_CacheAttached(PXCache)        |



| Namespace     | Simple Name                   | Name   |
|---------------|-------------------------------|--|
| PX.Objects.AR | ARSmallBalanceWriteOfEntry    | ARAdjust_AdjgTranPeriodID_CacheAttached(PXCache)                                     |
| PX.Objects.AR | ARSmallBalanceWriteOfEntry    | ARAdjust_AdjgFinPeriodID_CacheAttached(PXCache)                                      |
| PX.Objects.AR | ARSmallBalanceWriteOfEntry    | ARAdjust_AdjgTranPeriodID_CacheAttached(PXCache)                                     |
| PX.Objects.AR | CustomerPaymentMethodMaint    | CreateCCPaymentMethodHF(PXAdapter)   |
| PX.Objects.AR | CustomerPaymentMethodMaint    | SyncCCPaymentMethods(PXAdapter)  |
| PX.Objects.AR | CustomerPaymentMethodMaint    | ManageCCPaymentMethodHF(PXAdapter)   |
| PX.Objects.AR | ARInvoiceEntry                | CurrencyInfo_RowUpdated(PXCache,PXRowUpdatedEventArgs)                               |
| PX.Objects.AR | ARInvoiceEntry                | GetCuryDocBal(PXCache,CurrencyInfo,CurrencyInfo,Nullable<Decimal>,Nullable<Decimal>) |
| PX.Objects.AR | ARInvoiceEntry                | ARAdjust_AdjgTranPeriodID_CacheAttached(PXCache)                                     |
| PX.Objects.AR | ARInvoiceEntry                | CalcBalances(ARAdjust,Boolean)   |
| PX.Objects.AR | ARInvoiceEntry                | CalcBalances<T>(ARAdjust,T,Boolean)  |
| PX.Objects.AR | ARInvoiceEntry                | AddToInvoiced(ARTran,Decimal,Nullable<Int32>)  |
| PX.Objects.AR | ARInvoiceEntry                | SubtractAmountToInvoice(ARTran,Decimal,Nullable<Int32>)                              |
| PX.Objects.AR | ARCommissionPeriodIDAttribute | FormatPeriod(String)   |
| PX.Objects.AR | ARCommissionPeriodIDAttribute | UnFormatPeriod(String)   |

| Namespace                         | Simple Name                       | Name   |
|-----------------------------------|-----------------------------------|--|
| PX.Objects.AR                     | ARTaxAttribute                    | .ctor(Type,Type,Type)  |
| PX.Objects.AR                     | AROpenPeriodAttribute             | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,FinPeriodSelectorAttribute+SelectionModeWithRestrictions,Type[]) |
| PX.Objects.AR                     | SalesPriceltem                    | .ctor(String,Decimal,String,String)  |
| PX.Objects.AR.BQL                 | IsSelfVoidingVoidApplication      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AR.BQL                 | IsSelfVoiding                     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AR.BQL                 | HasNonZeroGLAmount                | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AR.BQL                 | IsNotSelfApplying                 | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AR.BQL                 | HasUnreleasedVoidPayment          | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AR.BQL                 | IsSchedulable                     | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManagerGraph | GetOrCreatePaymentProfile(PXGraph,ICustomerPaymentMethodAdapter,ICustomerPaymentMethodDetailAdapter)                         |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManagerGraph | GetCreatePaymentProfileForm(PXGraph,ICustomerPaymentMethodAdapter)   |

| Namespace                         | Simple Name                       | Name  |
|-----------------------------------|-----------------------------------|---|
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManagerGraph | GetManagePaymentProfileForm(PXGraph, CustomerPaymentMethod)   |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManagerGraph | GetNewPaymentProfiles(PXGraph, ICustomerPaymentMethodAdapter, ICustomerPaymentMethodDetailAdapter)            |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManagerGraph | GetPaymentProfile(PXGraph, PXSelectBase<CustomerPaymentMethod>, PXSelectBase<CustomerPaymentMethodDetail>)    |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManagerGraph | DeletePaymentProfile(PXGraph, PXSelectBase<CustomerPaymentMethod>, PXSelectBase<CustomerPaymentMethodDetail>) |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentProcessingGraph          | RecordAuthorization(ICCPayment, String, Nullable<Decimal>, Nullable<DateTime>, Nullable<Int32>&)              |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentProcessingGraph          | RecordCapture(ICCPayment, String, String, Nullable<Decimal>, Nullable<Int32>&)                                |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager      | set_PMInstanceID(Nullable<Int32>)   |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager      | set_CustomerID(Nullable<Int32>)   |

| Namespace                         | Simple Name                  | Name   |
|-----------------------------------|------------------------------|--|
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | set_PrefixForCustomerCD(String)  |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | set_CallerGraph(PXGraph)   |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | set_String2DateConverter(String2DateConverterFunc)   |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | .ctor(String,CCProcessingFeature)  |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | GetCreatePaymentProfileForm(PXGraph,ICustomerPaymentMethodAdapter)                                       |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | GetNewPaymentProfiles(PXGraph,ICustomerPaymentMethodAdapter,ICustomerPaymentMethodDetailAdapter)         |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | GetManagePaymentProfileForm<TPaymentMethodType>(PXGraph,TPaymentMethodType)                              |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | GetOrCreatePaymentProfile(PXGraph,ICustomerPaymentMethodAdapter,ICustomerPaymentMethodDetailAdapter)     |
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformationManager | GetPaymentProfile(PXGraph,PXSelectBase<CustomerPaymentMethod>,PXSelectBase<CustomerPaymentMethodDetail>) |

| Namespace                         | Simple Name                   | Name   |
|-----------------------------------|-------------------------------|--|
| PX.Objects.AR.CCPaymentProcessing | CCCustomerInformation Manager | DeletePaymentProfile(PXGraph,PXSelectBase<CustomerPaymentMethod>,PXSelectBase<CustomerPaymentMethodDetail>)  |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | AuthorizeCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>)  |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | AuthorizeCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>,CCPaymentEntry+UpdateDocStateDelegate,ICCTransactionsProcessor)   |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | CaptureCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>,Boolean,CCPaymentEntry+ReleaseDelegate)   |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | CaptureOnlyCCPayment<TNode>(TNode,String,PXSelectBase<CCProcTran>,Boolean)   |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | CaptureCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>,CCPaymentEntry+ReleaseDelegate,CCPaymentEntry+UpdateDocStateDelegate,ICCTransactionsProcessor)            |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | CaptureOnlyCCPayment<TNode>(TNode,String,PXSelectBase<CCProcTran>,CCPaymentEntry+ReleaseDelegate,CCPaymentEntry+UpdateDocStateDelegate,ICCTransactionsProcessor) |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | VoidCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>,Boolean)   |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | VoidCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>,Boolean,CCPaymentEntry+ReleaseDelegate)  |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | VoidCCPayment<TNode>(TNode,PXSelectBase<CCProcTran>,CCPaymentEntry+ReleaseDelegate,CCPaymentEntry+UpdateDocStateDelegate,ICCTransactionsProcessor)               |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | CreditCCPayment<TNode>(TNode,String,PXSelectBase<CCProcTran>,CCPaymentEntry+ReleaseDelegate,CCPaymentEntry+UpdateDocStateDelegate,ICCTransactionsProcessor)      |
| PX.Objects.AR.CCPaymentProcessing | CCPaymentEntry                | CreditCCPayment<TNode>(TNode,String,PXSelectBase<CCProcTran>,Boolean,CCPaymentEntry+ReleaseDelegate)   |

| Namespace                                  | Simple Name                      | Name  |
|--|----------------------------------|---|
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentEntry                   | RecordCCPayment<TNode>(TNode,String,String,PXSelectBase<CCProcTran>,CCPaymentEntry+ReleaseDelegate,CCPaymentEntry+UpdateDocStateDelegate)       |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentEntry                   | RecordCCPayment<TNode>(TNode,String,String,PXSelectBase<CCProcTran>,Boolean)  |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentEntry                   | RecordCCCredit<TNode>(TNode,String,String,String,PXSelectBase<CCProcTran>,CCPaymentEntry+ReleaseDelegate,CCPaymentEntry+UpdateDocStateDelegate) |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentEntry                   | RecordCCCredit<TNode>(TNode,String,String,String,PXSelectBase<CCProcTran>,Boolean)  |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentEntry                   | ReleaseARDocument(IBqlTable)  |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentProcessing              | RecordAuthorization(ICCPayment,String,Nullable<Decimal>,Nullable<DateTime>,Nullable<Int32>&)  |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentProcessing              | RecordCapture(ICCPayment,String,String,Nullable<Decimal>,Nullable<Int32>&)  |
| PX.Objects.AR.CCPaymentProcessing          | CCPaymentProcessing              | RecordTransaction(Nullable<Int32>&,CCTranType,CCProcTran,CCProcessingCenter)  |
| PX.Objects.AR.CCPaymentProcessing.Wrappers | ExtendedProfileProcessingWrapper | GetExtendedProfileProcessingWrapper(Object,CCProcessingContext)   |
| PX.Objects.AR.CCPaymentProcessing.Wrappers | HostedFromProcessingWrapper      | GetBaseProfileProcessingWrapper(Object,CCProcessingContext)   |
| PX.Objects.AR.CCPaymentProcessing.Wrappers | BaseProfileProcessingWrapper     | GetBaseProfileProcessingWrapper(Object,CCProcessingContext)   |
| PX.Objects.AR.CCPaymentProcessing.Wrappers | CardTransactionProcessingWrapper | GetTransactionProcessingWrapper(Object,CCProcessingContext)   |

| Namespace                                      | Simple Name                   | Name  |
|--|-------------------------------|---|
| PX.Objects.AR.CCPaymentProcessing.Wrappers     | V1CardTransactionProcessor    | .ctor(ICCPaymentProcessing, ICardProcessingReadersProvider)   |
| PX.Objects.AR.CCPaymentProcessing.Wrappers     | V2CardTransactionProcessor    | .ctor(ICCPaymentProcessing, ICardProcessingReadersProvider)   |
| PX.Objects.AR.CCPaymentProcessing.Repositories | CardProcessingReadersProvider | GetCardProcessingProvider(CCPaymentProcessingContext)   |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | ResolveCCPaymentState(IEnumerable<PXResult<CCProcTran>>)  |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | ResolveCCPaymentState(IEnumerable<PXResult<CCProcTran>>, CCProcTran&)   |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | ResolveCCPaymentState(IEnumerable<CCProcTran>, CCProcTran&)   |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | IsExpired(CCProcTran)   |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | HasOpenCCTran(PXSelectBase<CCProcTran>)   |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | FindCCPreAuthorizing(IEnumerable<PXResult<CCProcTran>>)   |
| PX.Objects.AR.CCPaymentProcessing.Helpers      | CCProcTranHelper              | FindCapturing(PXSelectBase<CCProcTran>)   |
| PX.Objects.PO                                  | POReceiptEntry                | ReleaseReturnVialIssue(INIssueEntry, APIInvoiceEntry, POReceipt, DocumentList<INRegister>, DocumentList<APIInvoice>, Boolean) |

| Namespace  | Simple Name             | Name  |
|--|-------------------------|---|
| PX.Objects.PO                                      | POReceiptEntry          | ReopenOrdersOnReturn(IEnumerable<Tuple<String,String>>)   |
| PX.Objects.PO                                      | POReceiptEntry          | ReleaseReturnViaAdjustment(INAdjustmentEntry,APIInvoiceEntry,POReceipt,DocumentList<INRegister>,DocumentList<APIInvoice>,Boolean) |
| PX.Objects.PO                                      | POReceiptEntry          | SetAdjustmentReturnCostFinal(INTran,POReceiptLine,POReceiptLineSplit,InventoryItem,Boolean,Boolean)                               |
| PX.Objects.PO                                      | POOrder                 | get_Receipt()   |
| PX.Objects.PO                                      | POOrder                 | set_Receipt(Nullable<Boolean>)  |
| PX.Objects.PO                                      | POOpenPeriodAttribute   | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean)  |
| PX.Objects.PO                                      | POOrderEntry            | NewVendor(PXAdapter)  |
| PX.Objects.PO                                      | POOrderEntry            | EditVendor(PXAdapter)   |
| PX.Objects.PO                                      | POOrderEntry            | NewItem(PXAdapter)  |
| PX.Objects.PO                                      | POOrderEntry            | EditItem(PXAdapter)   |
| PX.Objects.PO                                      | POOrderS                | get_Receipt()   |
| PX.Objects.PO                                      | POOrderS                | set_Receipt(Nullable<Boolean>)  |
| PX.Objects.PO.LandedCosts                          | POReceiptLineAdjustment | get_QtyToAssign()   |
| PX.Objects.PO.LandedCosts                          | POReceiptLineAdjustment | set_QtyToAssign(Decimal)  |
| PX.Objects.PO.GraphExtensions.APIInvoiceSmartPanel | LinkLineExtensions      | _(Events+FieldVerifying<APIInvoiceEntry+LinkLineFilter+selectedMode>)   |
| PX.Objects.AP                                      | APQuickCheckEntry       | ParentFieldUpdated(PXCache,PXRowUpdatedEventArgs)   |
| PX.Objects.AP                                      | APQuickCheckEntry       | APQuickCheck_BranchID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |



| Namespace     | Simple Name              | Name  |
|---------------|--------------------------|---|
| PX.Objects.AP | APQuickCheckEntry        | APPaymentChargeTran_TransPeriodID_CacheAttached(PXCache)                          |
| PX.Objects.AP | APDocumentEnq            | get_FinPeriodRepository()   |
| PX.Objects.AP | APDocumentFilter         | get_ByFinancialPeriod()   |
| PX.Objects.AP | APDocumentFilter         | set_ByFinancialPeriod(Nullable<Boolean>)  |
| PX.Objects.AP | APPaymentEntry           | get_FinPeriodRepository()   |
| PX.Objects.AP | APPaymentEntry           | get_FinPeriodUtils()  |
| PX.Objects.AP | APPaymentEntry           | ParentFieldUpdated(PXCache,PXRowUpdatedEventArgs)                                 |
| PX.Objects.AP | APIInvoiceEntry          | ParentFieldUpdated(PXCache,PXRowUpdatedEventArgs)                                 |
| PX.Objects.AP | APIInvoiceEntry          | AddPOReceiptLine(IAPTranSource,HashSet<APTran>,APIInvoiceEntry+POProcessingInfo&) |
| PX.Objects.AP | APRetainageRelease       | ReleaseRetainage(APIInvoiceEntry,APIInvoiceExt,APRetainageFilter,Boolean)         |
| PX.Objects.AP | APVendorBalanceEnq       | get_FinPeriodRepository()   |
| PX.Objects.AP | APQuickCheckTaxAttribute | .ctor(Type,Type,Type)   |
| PX.Objects.AP | APQuickCheckTaxAttribute | .ctor(Type,Type,Type,Type)  |
| PX.Objects.AP | APRetainedTaxAttribute   | .ctor(Type,Type,Type)   |
| PX.Objects.AP | APRetainedTaxAttribute   | .ctor(Type,Type,Type,Type)  |
| PX.Objects.AP | APIInvoiceEntryRetainage | ReleaseRetainageProc(APIInvoice,RetainageOptions,Boolean)                         |
| PX.Objects.AP | RetainageOptions         | get_FinPeriodID()   |

| Namespace     | Simple Name           | Name   |
|---------------|-----------------------|--|
| PX.Objects.AP | RetainageOptions      | set_FinPeriodID(String)  |
| PX.Objects.AP | IsPOLinkedAPBill      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection)             |
| PX.Objects.AP | APRegister            | get_Hidden()   |
| PX.Objects.AP | APRegister            | set_Hidden(Nullable<Boolean>)  |
| PX.Objects.AP | APTran                | get_CuryTaxableAmt()   |
| PX.Objects.AP | APTran                | set_CuryTaxableAmt(Nullable<Decimal>)  |
| PX.Objects.AP | APTran                | get_TaxableAmt()   |
| PX.Objects.AP | APTran                | set_TaxableAmt(Nullable<Decimal>)  |
| PX.Objects.AP | APTran                | get_CuryTaxAmt()   |
| PX.Objects.AP | APTran                | set_CuryTaxAmt(Nullable<Decimal>)  |
| PX.Objects.AP | APTran                | get_TaxAmt()   |
| PX.Objects.AP | APTran                | set_TaxAmt(Nullable<Decimal>)  |
| PX.Objects.AP | PK                    | Find(PXGraph,Int32)  |
| PX.Objects.AP | APTaxAttribute        | .ctor(Type,Type,Type)  |
| PX.Objects.AP | APTaxAttribute        | .ctor(Type,Type,Type,Type)   |
| PX.Objects.AP | APOpenPeriodAttribute | .ctor(Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean,FinPeriodSelectorAttribute+SelectionModeWithRestrictions,Type[]) |
| PX.Objects.AP | APReleaseProcess      | get_FinPeriodRepository()  |
| PX.Objects.AP | APReleaseProcess      | get_FinPeriodUtils()   |

| Namespace          | Simple Name              | Name   |
|--------------------|--------------------------|--|
| PX.Objects.AP      | APReleaseProcess         | APPayment_AdjFinPeriodID_CacheAttached(PXCache)  |
| PX.Objects.AP      | APReleaseProcess         | APPayment_AdjTranPeriodID_CacheAttached(PXCache)   |
| PX.Objects.AP      | APReleaseProcess         | CreateGLTranAP(APRegister,Boolean)   |
| PX.Objects.AP.B QL | HasUnreleasedVoidPayment | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.AP.B QL | IsPOLinked               | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.AP.B QL | IsSchedulable            | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.AP.B QL | IsFromExpenseClaims      | Parse(PXGraph,List<IBqlParameter>,List<Type>,List<Type>,List<IBqlSortColumn>,StringBuilder,BqlCommand+Selection) |
| PX.Objects.FS      | SMSOpenPeriodAttribute   | .ctor(Type,Type,Type,Type,Type,Type,Type,Type,Boolean,Boolean,Boolean)   |
| PX.Objects.FS      | AppointmentEntry         | InventoryItem_ActionType_CacheAttached(PXCache)  |
| PX.Objects.FS      | AppointmentEntry         | InventoryItem_PurchaseUnit_CacheAttached(PXCache)  |
| PX.Objects.FS      | AppointmentEntry         | ViewDirectionOnMap(PXAdapter)  |
| PX.Objects.FS      | AppointmentEntry         | FSServiceOrder_AddressLine1_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.FS      | AppointmentEntry         | FSServiceOrder_AddressLine2_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.FS      | AppointmentEntry         | FSServiceOrder_CountryID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |
| PX.Objects.FS      | AppointmentEntry         | FSServiceOrder_City_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)  |
| PX.Objects.FS      | AppointmentEntry         | FSServiceOrder_State_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)   |



| Namespace     | Simple Name                  | Name  |
|---------------|------------------------------|---|
| PX.Objects.FS | ServiceOrderCore             | GetAddressAndContactFromCustomerContact(PXGraph,Nullable<Int32>,Address&,Contact&)            |
| PX.Objects.FS | ServiceOrderCore             | GetAddressAndContactFromBranchLocation(PXGraph,Nullable<Int32>,Address&,Contact&)             |
| PX.Objects.FS | ServiceOrderCore             | SetDefaultAddressAndContactInfo(PXGraph,FSServiceOrder,FSSrvOrdType)                          |
| PX.Objects.FS | DateHandler                  | setDate(DateTime)   |
| PX.Objects.FS | DateHandler                  | setHours(Nullable<DateTime>)  |
| PX.Objects.FS | DateHandler                  | getDay()  |
| PX.Objects.FS | SharedFunctions              | ShowServiceOrderNote(PXDBOperation,PXView,Nullable<Int32>)                                    |
| PX.Objects.FS | SharedFunctions              | ShowServiceOrderNote(PXDBOperation,PXView,InventoryItem)                                      |
| PX.Objects.FS | SharedFunctions              | GetAppointmentAddress(FSServiceOrder)   |
| PX.Objects.FS | SharedFunctions              | GetBranchLocationAddress(FSBranchLocation)  |
| PX.Objects.FS | SharedFunctions              | GetCompleteAdress(String,String,String,String,String,String)                                  |
| PX.Objects.FS | SharedFunctions              | CreateSoldEquipment(SMEquipmentMaint,SoldInventoryItem,SOLine,FSxSOLine,String,InventoryItem) |
| PX.Objects.FS | SharedFunctions              | GetEnableSeasonSetting(PXGraph,FSSchedule,FSRouteSetup,FSSetup)                               |
| PX.Objects.FS | ServiceOrderEntryExternalTax | Persist()   |
| PX.Objects.FS | ServiceOrderEntryExternalTax | ApplyTax(FSServiceOrder,GetTaxResult)   |
| PX.Objects.FS | ServiceOrderEntryExternalTax | GetFromAddress()  |
| PX.Objects.FS | AppointmentEntryExternalTax  | Persist()   |

| Namespace     | Simple Name                 | Name  |
|---------------|-----------------------------|---|
| PX.Objects.FS | AppointmentEntryExternalTax | CalculateExternalTax(FSAppointment,FSServiceOrder)                      |
| PX.Objects.FS | AppointmentEntryExternalTax | ApplyTax(FSAppointment,GetTaxResult)                                    |
| PX.Objects.FS | AppointmentEntryExternalTax | GetFromAddress()  |
| PX.Objects.FS | AppointmentEntryExternalTax | GetToAddress(FSAppointment,FSServiceOrder)                              |
| PX.Objects.FS | ContractInvoiceLine         | .ctor(PXResult<FSContractPeriodDet,FSContractPeriod,FSServiceContract>) |
| PX.Objects.FS | SM_SOOrderEntry             | EnableDisable_OpenAppointmentBoard(PXCache,SOOrder,FSxSOOrder)          |
| PX.Objects.FS | SM_SOOrderEntry             | EnableDisable_SDFields(PXCache,Object)                                  |
| PX.Objects.FS | FSBranchLocation            | get_AddressLine1()  |
| PX.Objects.FS | FSBranchLocation            | set_AddressLine1(String)  |
| PX.Objects.FS | FSBranchLocation            | get_AddressLine2()  |
| PX.Objects.FS | FSBranchLocation            | set_AddressLine2(String)  |
| PX.Objects.FS | FSBranchLocation            | get_AddressLine3()  |
| PX.Objects.FS | FSBranchLocation            | set_AddressLine3(String)  |
| PX.Objects.FS | FSBranchLocation            | get_City()  |
| PX.Objects.FS | FSBranchLocation            | set_City(String)  |
| PX.Objects.FS | FSBranchLocation            | get_CountryID()   |
| PX.Objects.FS | FSBranchLocation            | set_CountryID(String)   |

| Namespace     | Simple Name      | Name                               |
|---------------|------------------|------------------------------------|
| PX.Objects.FS | FSBranchLocation | get_Email()                        |
| PX.Objects.FS | FSBranchLocation | set_Email(String)                  |
| PX.Objects.FS | FSBranchLocation | get_Fax()                          |
| PX.Objects.FS | FSBranchLocation | set_Fax(String)                    |
| PX.Objects.FS | FSBranchLocation | get_IsValidated()                  |
| PX.Objects.FS | FSBranchLocation | set_IsValidated(Nullable<Boolean>) |
| PX.Objects.FS | FSBranchLocation | get_Phone1()                       |
| PX.Objects.FS | FSBranchLocation | set_Phone1(String)                 |
| PX.Objects.FS | FSBranchLocation | get_Phone2()                       |
| PX.Objects.FS | FSBranchLocation | set_Phone2(String)                 |
| PX.Objects.FS | FSBranchLocation | get_Phone3()                       |
| PX.Objects.FS | FSBranchLocation | set_Phone3(String)                 |
| PX.Objects.FS | FSBranchLocation | get_PostalCode()                   |
| PX.Objects.FS | FSBranchLocation | set_PostalCode(String)             |
| PX.Objects.FS | FSBranchLocation | get_Salutation()                   |
| PX.Objects.FS | FSBranchLocation | set_Salutation(String)             |
| PX.Objects.FS | FSBranchLocation | get_State()                        |
| PX.Objects.FS | FSBranchLocation | set_State(String)                  |
| PX.Objects.FS | FSBranchLocation | get_WebSite()                      |

| Namespace     | Simple Name      | Name                               |
|---------------|------------------|------------------------------------|
| PX.Objects.FS | FSBranchLocation | set_WebSite(String)                |
| PX.Objects.FS | FSManufacturer   | get_AddressLine1()                 |
| PX.Objects.FS | FSManufacturer   | set_AddressLine1(String)           |
| PX.Objects.FS | FSManufacturer   | get_AddressLine2()                 |
| PX.Objects.FS | FSManufacturer   | set_AddressLine2(String)           |
| PX.Objects.FS | FSManufacturer   | get_AddressLine3()                 |
| PX.Objects.FS | FSManufacturer   | set_AddressLine3(String)           |
| PX.Objects.FS | FSManufacturer   | get_City()                         |
| PX.Objects.FS | FSManufacturer   | set_City(String)                   |
| PX.Objects.FS | FSManufacturer   | get_CountryID()                    |
| PX.Objects.FS | FSManufacturer   | set_CountryID(String)              |
| PX.Objects.FS | FSManufacturer   | get_Email()                        |
| PX.Objects.FS | FSManufacturer   | set_Email(String)                  |
| PX.Objects.FS | FSManufacturer   | get_Fax()                          |
| PX.Objects.FS | FSManufacturer   | set_Fax(String)                    |
| PX.Objects.FS | FSManufacturer   | get_IsValidated()                  |
| PX.Objects.FS | FSManufacturer   | set_IsValidated(Nullable<Boolean>) |
| PX.Objects.FS | FSManufacturer   | get_Phone1()                       |
| PX.Objects.FS | FSManufacturer   | set_Phone1(String)                 |



| Namespace     | Simple Name    | Name                     |
|---------------|----------------|--------------------------|
| PX.Objects.FS | FSManufacturer | get_Phone2()             |
| PX.Objects.FS | FSManufacturer | set_Phone2(String)       |
| PX.Objects.FS | FSManufacturer | get_Phone3()             |
| PX.Objects.FS | FSManufacturer | set_Phone3(String)       |
| PX.Objects.FS | FSManufacturer | get_PostalCode()         |
| PX.Objects.FS | FSManufacturer | set_PostalCode(String)   |
| PX.Objects.FS | FSManufacturer | get_Salutation()         |
| PX.Objects.FS | FSManufacturer | set_Salutation(String)   |
| PX.Objects.FS | FSManufacturer | get_State()              |
| PX.Objects.FS | FSManufacturer | set_State(String)        |
| PX.Objects.FS | FSManufacturer | get_WebSite()            |
| PX.Objects.FS | FSManufacturer | set_WebSite(String)      |
| PX.Objects.FS | FSServiceOrder | get_AddressLine1()       |
| PX.Objects.FS | FSServiceOrder | set_AddressLine1(String) |
| PX.Objects.FS | FSServiceOrder | get_AddressLine2()       |
| PX.Objects.FS | FSServiceOrder | set_AddressLine2(String) |
| PX.Objects.FS | FSServiceOrder | get_AddressLine3()       |
| PX.Objects.FS | FSServiceOrder | set_AddressLine3(String) |
| PX.Objects.FS | FSServiceOrder | get_AddressValidated()   |

| Namespace     | Simple Name    | Name                                    |
|---------------|----------------|---|
| PX.Objects.FS | FSServiceOrder | set_AddressValidated(Nullable<Boolean>) |
| PX.Objects.FS | FSServiceOrder | get_City()                              |
| PX.Objects.FS | FSServiceOrder | set_City(String)                        |
| PX.Objects.FS | FSServiceOrder | get_CountryID()                         |
| PX.Objects.FS | FSServiceOrder | set_CountryID(String)                   |
| PX.Objects.FS | FSServiceOrder | get_Email()                             |
| PX.Objects.FS | FSServiceOrder | set_Email(String)                       |
| PX.Objects.FS | FSServiceOrder | get_Fax()                               |
| PX.Objects.FS | FSServiceOrder | set_Fax(String)                         |
| PX.Objects.FS | FSServiceOrder | get_Phone1()                            |
| PX.Objects.FS | FSServiceOrder | set_Phone1(String)                      |
| PX.Objects.FS | FSServiceOrder | get_Phone2()                            |
| PX.Objects.FS | FSServiceOrder | set_Phone2(String)                      |
| PX.Objects.FS | FSServiceOrder | get_Phone3()                            |
| PX.Objects.FS | FSServiceOrder | set_Phone3(String)                      |
| PX.Objects.FS | FSServiceOrder | get_PostalCode()                        |
| PX.Objects.FS | FSServiceOrder | set_PostalCode(String)                  |
| PX.Objects.FS | FSServiceOrder | get_Status()                            |
| PX.Objects.FS | FSServiceOrder | set_Status(String)                      |

| Namespace     | Simple Name                | Name                                     |
|---------------|----------------------------|--|
| PX.Objects.FS | FSServiceOrder             | get_Attention()                          |
| PX.Objects.FS | FSServiceOrder             | set_Attention(String)                    |
| PX.Objects.FS | FSSrvOrdType               | get_AppWithMultEmp()                     |
| PX.Objects.FS | FSSrvOrdType               | set_AppWithMultEmp(Nullable<Boolean>)    |
| PX.Objects.FS | FSSrvOrdType               | get_AppWithoutEmp()                      |
| PX.Objects.FS | FSSrvOrdType               | set_AppWithoutEmp(Nullable<Boolean>)     |
| PX.Objects.FS | FSSrvOrdType               | get_AppWithoutSrv()                      |
| PX.Objects.FS | FSSrvOrdType               | set_AppWithoutSrv(Nullable<Boolean>)     |
| PX.Objects.FS | FSSrvOrdType               | get_SingleAppointment()                  |
| PX.Objects.FS | FSSrvOrdType               | set_SingleAppointment(Nullable<Boolean>) |
| PX.Objects.FS | FSSrvOrdType               | get_SingleService()                      |
| PX.Objects.FS | FSSrvOrdType               | set_SingleService(Nullable<Boolean>)     |
| PX.Objects.FS | FSxService                 | get_AutoShowNote()                       |
| PX.Objects.FS | FSxService                 | set_AutoShowNote(Nullable<Boolean>)      |
| PX.Objects.FS | FSxUserPreferences         | IsActive()                               |
| PX.Objects.FS | FSAppointmentScheduleBoard | get_ServiceOrderPhone()                  |
| PX.Objects.FS | FSAppointmentScheduleBoard | set_ServiceOrderPhone(String)            |

| Namespace     | Simple Name                | Name  |
|---------------|----------------------------|---|
| PX.Objects.FS | FSAppointmentScheduleBoard | get_ServiceOrderEmail()   |
| PX.Objects.FS | FSAppointmentScheduleBoard | set_ServiceOrderEmail(String)   |
| PX.Objects.FS | FSAppointmentScheduleBoard | get_ContactName()   |
| PX.Objects.FS | FSAppointmentScheduleBoard | set_ContactName(String)   |
| PX.Objects.FS | FSAppointmentScheduleBoard | get_ContactPhone()  |
| PX.Objects.FS | FSAppointmentScheduleBoard | set_ContactPhone(String)  |
| PX.Objects.FS | ExternalControls           | EmployeeRecords(Nullable<Int32>,Nullable<Int32>,Nullable<Boolean>,Nullable<Boolean>,Nullable<DateTime>,ExternalControls+DispatchBoardFilters[]) |
| PX.Objects.FS | ExternalControls           | FilterEmployeesByBranchLocation(PXResultset<PEmployee>,PXResultset<FSTimeSlot>,PXResultset<FSAppointmentEmployee>)                              |
| PX.Objects.FS | ExternalControls           | FilterEmployeesByBranchLocationAndScheduled(PXResultset<PEmployee>,PXResultset<FSTimeSlot>,PXResultset<FSAppointmentEmployee>)                  |
| PX.Objects.FS | ExternalControls           | VendorRecords(Nullable<Int32>,Nullable<Int32>,Nullable<Boolean>,Nullable<Boolean>,Nullable<DateTime>,ExternalControls+DispatchBoardFilters[])   |

| Namespace     | Simple Name        | Name   |
|---------------|--------------------|--|
| PX.Objects.FS | RouteNode          | .ctor(FSRoute,FSBranchLocation,String,String)  |
| PX.Objects.FS | RouteNode          | .ctor(FSAppointment,FSSrvOrdType,FSServiceOrder,FSCustomer,BAccountStaffMember,Location) |
| PX.Objects.FS | RouteNode          | .ctor(FSAppointment,FSSrvOrdType,FSServiceOrder,FSCustomer,Location)                     |
| PX.Objects.FS | ManufacturerMaint  | ViewMainOnMap(PXAdapter)   |
| PX.Objects.FS | ManufacturerMaint  | SetContactInfo(FSManufacturer)   |
| PX.Objects.FS | ManufacturerMaint  | FSManufacturer_ContactID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)                   |
| PX.Objects.FS | RouteDocumentMaint | FSAppointment_ServiceContractID_CacheAttached(PXCache)                                   |
| PX.Objects.FS | RouteDocumentMaint | FSAppointment_ScheduleID_CacheAttached(PXCache)  |
| PX.Objects.FS | ServiceOrderEntry  | InventoryItem_ActionType_CacheAttached(PXCache)  |
| PX.Objects.FS | ServiceOrderEntry  | InventoryItem_PurchaseUnit_CacheAttached(PXCache)  |
| PX.Objects.FS | ServiceOrderEntry  | ViewDirectionOnMap(PXAdapter)  |
| PX.Objects.FS | VehicleMaint       | FSVehicle_SerialNumber_CacheAttached(PXCache)  |
| PX.Objects.FS | VehicleMaint       | FSVehicle_RegistrationNbr_CacheAttached(PXCache)   |

## Other Breaking Fields

| Namespace | Simple Name             | Name                |
|-----------|-------------------------|---------------------|
| PX.SM     | PerformanceMonitorMaint | ActionGC            |
| PX.SM     | PerformanceMonitorMaint | ActionStackTrace    |
| PX.SM     | PerformanceMonitorMaint | CurrentThreadsPanel |

| Namespace              | Simple Name            | Name                        |
|------------------------|------------------------|-----------------------------|
| PX.Data                | PXView                 | _Cache                      |
| PX.Data                | PXCache                | _TranslationsCount          |
| PX.Data                | PXDataFieldParam       | FieldName                   |
| PX.Data                | FieldDescription       | FieldName                   |
| PX.Data                | PXDataField            | FieldName                   |
| PX.Data                | PXDataField            | TableAlias                  |
| PX.Data                | PXDBScalarAttribute    | dict                        |
| PX.Data.Maintenance.GI | GenericInquiryDesigner | MoveUpResults               |
| PX.Data.Maintenance.GI | GenericInquiryDesigner | MoveDownResults             |
| PX.Objects.PM          | ProformaEntry          | avalaraSetup                |
| PX.Objects.PM          | ProformaEntry          | recalcAvalara               |
| PX.Objects.PM          | ProformaEntry          | RecalculateAvalaraTaxesSync |
| PX.Objects.PM          | ProformaEntry          | SkipAvalaraTaxProcessing    |
| PX.Objects.PM          | PMBillEngine           | PMDetail                    |
| PX.Objects.PM          | RegisterEntry          | ContractItems               |
| PX.Objects.PO          | POLandedCostProcess    | receiptsList                |
| PX.Objects.PO          | POReceiptEntry         | DiscountDetails             |
| PX.Objects.PO          | POReceiptEntry         | taxzone                     |
| PX.Objects.PO          | POReceiptEntry         | Tax_Rows                    |

| Namespace     | Simple Name    | Name                                  |
|---------------|----------------|---------------------------------------|
| PX.Objects.PO | POReceiptEntry | Taxes                                 |
| PX.Objects.PO | POReceiptEntry | poOrderTaxUPD                         |
| PX.Objects.PO | POReceiptEntry | poOrderTaxTranUPD                     |
| PX.Objects.PO | POReceiptEntry | landedCostTrans                       |
| PX.Objects.PO | POReceiptEntry | CurInfoLC                             |
| PX.Objects.PO | POReceiptEntry | sotaxselect                           |
| PX.Objects.PO | POReceiptEntry | sotaxtriselect                        |
| PX.Objects.PO | POReceiptEntry | avalaraSetup                          |
| PX.Objects.PO | POReceiptEntry | recalcdiscountsfilter                 |
| PX.Objects.PO | POReceiptEntry | inquiry                               |
| PX.Objects.PO | POReceiptEntry | viewINDocument                        |
| PX.Objects.PO | POReceiptEntry | viewAPDocument                        |
| PX.Objects.PO | POReceiptEntry | viewLCINDocument                      |
| PX.Objects.PO | POReceiptEntry | viewLCAPInvoice                       |
| PX.Objects.PO | POReceiptEntry | recalculateDiscountsAction            |
| PX.Objects.PO | POReceiptEntry | recalcOk                              |
| PX.Objects.PO | POReceiptEntry | SkipAvalaraTaxProcessing              |
| PX.Objects.PO | Messages       | POReceiptTotalAmountMustBeNonNegative |
| PX.Objects.PO | Messages       | EmptyValuesFromAvalara                |

| Namespace     | Simple Name                | Name                     |
|---------------|----------------------------|--------------------------|
| PX.Objects.PO | POOrderEntry               | avalaraSetup             |
| PX.Objects.PO | POOrderEntry               | inquiry                  |
| PX.Objects.PO | POOrderEntry               | SkipAvalaraTaxProcessing |
| PX.Objects.TX | TXAvalaraCustomerUsageType | A                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | B                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | C                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | D                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | E                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | F                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | G                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | H                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | I                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | J                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | K                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | L                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | M                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | N                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | P                        |
| PX.Objects.TX | TXAvalaraCustomerUsageType | Q                        |



| Namespace     | Simple Name                | Name  |
|---------------|----------------------------|---|
| PX.Objects.TX | TXAvalaraCustomerUsageType | R   |
| PX.Objects.TX | Messages                   | CannotReleaseTaxReportNoFinancialPeriodForPeriodEndDate       |
| PX.Objects.TX | Messages                   | FinancialPeriodInactiveDocumentsWillBePostedToFirstOpenPeriod |
| PX.Objects.TX | Messages                   | AvalaraSetupNotConfigured                                     |
| PX.Objects.TX | Messages                   | AvalaraConnectSuccessAskHeader                                |
| PX.Objects.TX | Messages                   | AvalaraConnectSuccessAskMsg                                   |
| PX.Objects.TX | Messages                   | AvalaraMaint  |
| PX.Objects.TX | Messages                   | Avalara   |
| PX.Objects.TX | Messages                   | AvalaraUrlsMissing  |
| PX.Objects.TX | Messages                   | AvalaralsNotActive  |
| PX.Objects.TX | Messages                   | AvalaraBranchToCompanyCodeMappingIsMissing                    |
| PX.Objects.TX | Messages                   | ConnectionToAvalaraFailed                                     |
| PX.Objects.TX | Messages                   | FailedToDeleteFromAvalara                                     |
| PX.Objects.TX | Messages                   | AvalaraTaxId  |
| PX.Objects.TX | Messages                   | AvalaraTaxFor   |
| PX.Objects.TX | Messages                   | A   |
| PX.Objects.TX | Messages                   | B   |
| PX.Objects.TX | Messages                   | C   |
| PX.Objects.TX | Messages                   | D   |

| Namespace     | Simple Name            | Name   |
|---------------|------------------------|--|
| PX.Objects.TX | Messages               | E  |
| PX.Objects.TX | Messages               | F  |
| PX.Objects.TX | Messages               | G  |
| PX.Objects.TX | Messages               | H  |
| PX.Objects.TX | Messages               | I  |
| PX.Objects.TX | Messages               | J  |
| PX.Objects.TX | Messages               | K  |
| PX.Objects.TX | Messages               | L  |
| PX.Objects.TX | Messages               | M  |
| PX.Objects.TX | Messages               | N  |
| PX.Objects.TX | Messages               | P  |
| PX.Objects.TX | Messages               | Q  |
| PX.Objects.TX | Messages               | R  |
| PX.Objects.TX | ExternalTaxPostProcess | service                                      |
| PX.Objects.SO | Messages               | SOInvoiceDiscountDetail                      |
| PX.Objects.SO | Messages               | GrossProfitValidationFailed                  |
| PX.Objects.SO | Messages               | GrossProfitValidationFailedAndFixed          |
| PX.Objects.SO | Messages               | GrossProfitValidationFailedAndPriceFixed     |
| PX.Objects.SO | Messages               | GrossProfitValidationFailedAndUnitPriceFixed |

| Namespace                           | Simple Name           | Name                              |
|-------------------------------------|-----------------------|-----------------------------------|
| PX.Objects.SO                       | Messages              | GrossProfitValidationFailedNoCost |
| PX.Objects.SO                       | Messages              | EmptyValuesFromAvalara            |
| PX.Objects.SO                       | SOInvoiceEntry        | SOInvoiceDiscountDetails          |
| PX.Objects.SO                       | SOOrderEntry          | avalaraSetup                      |
| PX.Objects.SO                       | SOOrderEntry          | recalcAvalara                     |
| PX.Objects.SO                       | SOOrderEntry          | SkipAvalaraTaxProcessing          |
| PX.Objects.SO                       | SOOrderEntry          | RecalculateAvalaraTaxesSync       |
| PX.Objects.IN                       | InventoryItemMaint    | avalaraSetup                      |
| PX.Objects.IN                       | NonStockItemMaint     | avalaraSetup                      |
| PX.Objects.Extensions.MultiCurrency | MultiCurrencyGraph    | CurrencyView                      |
| PX.Objects.DR                       | TransactionsGenerator | _financialPeriodProvider          |
| PX.Objects.GL                       | BaseGLHistory         | _FinPeriodID                      |
| PX.Objects.GL                       | Messages              | ClosePeriods                      |
| PX.Objects.GL                       | PostGraph             | ClosedCheck                       |
| PX.Objects.GL                       | PostGraph             | NextFiscalYear                    |
| PX.Objects.GL                       | PostGraph             | finPeriodRepository               |
| PX.Objects.EP                       | EPRuleBaseCondition   | EntityLength                      |
| PX.Objects.EP                       | ActivitiesEnq         | createNew                         |
| PX.Objects.EP                       | Messages              | RGLsNotDefinedForEmployee         |

| Namespace         | Simple Name       | Name                   |
|-------------------|-------------------|------------------------|
| PX.Objects.EP     | Messages          | HourlyRateIsNotSet     |
| PX.Objects.EP     | EmployeeMaint     | EmployeeRatesByProject |
| PX.Objects.CS     | Messages          | AvalaraAVSUnknownError |
| PX.Objects.CA     | CashTransferEntry | AddFilter              |
| PX.Objects.CA     | CashTransferEntry | TransferTran           |
| PX.Objects.CA     | CashTransferEntry | CurInfoOUT             |
| PX.Objects.CA     | CashTransferEntry | CurInfoIN              |
| PX.Objects.CA     | CashTransferEntry | currencyinfo_addfilter |
| PX.Objects.CA     | CashTransferEntry | PrepareAdd             |
| PX.Objects.CA     | CashTransferEntry | viewOutBatch           |
| PX.Objects.CA     | CashTransferEntry | viewInBatch            |
| PX.Objects.CA     | Messages          | EmptyValuesFromAvalara |
| PX.Objects.CA     | CATranEntry       | avalaraSetup           |
| PX.Objects.CA     | CATranEntry       | skipAvalaraCallOnSave  |
| PX.Objects.Common | ProcessingResult  | _messages              |
| PX.Objects.Common | Messages          | GridIsAlreadySorted    |
| PX.Objects.Common | Messages          | PasteLine              |
| PX.Objects.Common | Messages          | ResetOrder             |
| PX.Objects.AR     | ARCashSaleEntry   | avalaraSetup           |

| Namespace     | Simple Name             | Name                    |
|---------------|-------------------------|-------------------------|
| PX.Objects.AR | ARCashSaleEntry         | skipAvalaraCallOnSave   |
| PX.Objects.AR | ARReleaseProcess        | ARAdjustsToRelease      |
| PX.Objects.AR | ARInvoiceEntry          | avalaraSetup            |
| PX.Objects.AR | ARInvoiceEntry          | skipAvalaraCallOnSave   |
| PX.Objects.AR | Messages                | PostingToAvalaraFailed  |
| PX.Objects.AR | Messages                | EmptyValuesFromAvalara  |
| PX.Objects.AP | APInvoiceEntry          | _InvoiceNbr             |
| PX.Objects.AP | APInvoiceEntry          | viewLCPOReceipt         |
| PX.Objects.AP | APInvoiceEntry          | viewLCINDocument        |
| PX.Objects.AP | APInvoiceEntry          | addPostLandedCostTran   |
| PX.Objects.AP | APInvoiceEntry          | IsLCSplits              |
| PX.Objects.AP | APInvoiceEntry          | landedCostTrans         |
| PX.Objects.AP | APInvoiceEntry          | receiptLinesUPD         |
| PX.Objects.AP | APInvoiceEntry          | orderLinesUPD           |
| PX.Objects.AP | APInvoiceEntry          | landedCostTranSelection |
| PX.Objects.AP | APInvoiceEntry          | LCTranSplit             |
| PX.Objects.AP | APInvoiceEntry          | avalaraSetup            |
| PX.Objects.AP | APInvoiceEntry          | skipAvalaraCallOnSave   |
| PX.Objects.AP | APVendorPriceUpdateType | Receipt                 |

| Namespace       | Simple Name             | Name                       |
|-----------------|-------------------------|----------------------------|
| PX.Objects.AP   | APVendorPriceUpdateType | ReleaseReceipt             |
| PX.Objects.AP   | APReleaseProcess        | APAdjustsToRelease         |
| PX.Objects.AP   | Messages                | EmptyValuesFromAvalara     |
| PX.Objects.AP   | Messages                | VendorUpdateReceipt        |
| PX.Objects.AP   | Messages                | VendorUpdateReceiptRelease |
| PX.Common       | WebConfig               | OldBQLCompareMode          |
| PX.Data         | BqlCommand              | SubSelect                  |
| PX.Data         | Selection               | Columns                    |
| PX.Data         | PXAction                | AutomationDisabled         |
| PX.Data         | PXGraph                 | CachedServices             |
| PX.Data.SQLTree | Operation               | RANK                       |
| PX.Data.SQLTree | ProjectionItem          | type_                      |
| PX.Objects.PM   | RegisterEntry           | projectDummy               |
| PX.Objects.SO   | Messages                | SalesOrder                 |
| PX.Objects.SO   | Messages                | SalesOrderShipment         |
| PX.Objects.SO   | SOInvoiceEntry          | captureCCPayment           |
| PX.Objects.SO   | SOInvoiceEntry          | authorizeCCPayment         |
| PX.Objects.SO   | SOInvoiceEntry          | voidCCPayment              |
| PX.Objects.SO   | SOInvoiceEntry          | creditCCPayment            |

| Namespace     | Simple Name     | Name                       |
|---------------|-----------------|----------------------------|
| PX.Objects.SO | SOOrderEntry    | CarrierRates               |
| PX.Objects.SO | SOOrderEntry    | PlugIns                    |
| PX.Objects.SO | SOOrderEntry    | shopRates                  |
| PX.Objects.SO | SOOrderEntry    | refreshRates               |
| PX.Objects.SO | SOOrderEntry    | recalculatePackages        |
| PX.Objects.SO | SOOrderEntry    | authorizeCCPayment         |
| PX.Objects.SO | SOOrderEntry    | voidCCPayment              |
| PX.Objects.SO | SOOrderEntry    | captureCCPayment           |
| PX.Objects.SO | SOOrderEntry    | creditCCPayment            |
| PX.Objects.SO | SOOrderEntry    | createCCPaymentMethodHF    |
| PX.Objects.SO | SOOrderEntry    | syncCCPaymentMethods       |
| PX.Objects.SO | SOShipmentEntry | recalculatePackages        |
| PX.Objects.SO | PickPackShip    | kgToWeightUnit             |
| PX.Objects.SO | PickPackShip    | ScaleWeightValiditySeconds |
| PX.Objects.SO | PickPackShip    | CommonSetupUOM             |
| PX.Objects.SO | PickPackShip    | UserSetup                  |
| PX.Objects.SO | PickPackShip    | Cancel                     |
| PX.Objects.SO | PickPackShip    | Document                   |
| PX.Objects.SO | PickPackShip    | Transactions               |

| Namespace     | Simple Name  | Name             |
|---------------|--------------|------------------|
| PX.Objects.SO | PickPackShip | Splits           |
| PX.Objects.SO | PickPackShip | Packages         |
| PX.Objects.SO | PickPackShip | PackageSplits    |
| PX.Objects.SO | PickPackShip | ScanLogs         |
| PX.Objects.SO | PickPackShip | allocations      |
| PX.Objects.SO | PickPackShip | Scan             |
| PX.Objects.SO | PickPackShip | Confirm          |
| PX.Objects.SO | PickPackShip | ConfirmAll       |
| PX.Objects.SO | PickPackShip | Settings         |
| PX.Objects.SO | Msg          | Add              |
| PX.Objects.SO | Msg          | Remove           |
| PX.Objects.SO | Msg          | BarcodeMissing   |
| PX.Objects.SO | Msg          | BarcodePrompt    |
| PX.Objects.SO | Msg          | CommandAdd       |
| PX.Objects.SO | Msg          | CommandClear     |
| PX.Objects.SO | Msg          | CommandInventory |
| PX.Objects.SO | Msg          | CommandLot       |
| PX.Objects.SO | Msg          | CommandRemove    |
| PX.Objects.SO | Msg          | CommandUnknown   |



| Namespace     | Simple Name | Name                     |
|---------------|-------------|--------------------------|
| PX.Objects.SO | Msg         | CommandSetQuantity       |
| PX.Objects.SO | Msg         | CommandAccessRightsError |
| PX.Objects.SO | Msg         | LotExpired               |
| PX.Objects.SO | Msg         | LotInvalidQuantity       |
| PX.Objects.SO | Msg         | LotMissing               |
| PX.Objects.SO | Msg         | LotNotSupported          |
| PX.Objects.SO | Msg         | LotNotSupportedUOM       |
| PX.Objects.SO | Msg         | LotScanPrompt            |
| PX.Objects.SO | Msg         | LotSplitQuantityError    |
| PX.Objects.SO | Msg         | LotUniquenessError       |
| PX.Objects.SO | Msg         | SerialDuplicateError     |
| PX.Objects.SO | Msg         | SerialInvalidQuantity    |
| PX.Objects.SO | Msg         | LocationPrompt           |
| PX.Objects.SO | Msg         | LocationInvalid          |
| PX.Objects.SO | Msg         | InventoryAdded           |
| PX.Objects.SO | Msg         | InventoryRemoved         |
| PX.Objects.SO | Msg         | InventoryMissing         |
| PX.Objects.SO | Msg         | InventoryUpdated         |
| PX.Objects.SO | Msg         | PackageBoxMissing        |

| Namespace     | Simple Name | Name                              |
|---------------|-------------|-----------------------------------|
| PX.Objects.SO | Msg         | PackageComplete                   |
| PX.Objects.SO | Msg         | PackageCompletePrompt             |
| PX.Objects.SO | Msg         | PackageCommandMissingBoxId        |
| PX.Objects.SO | Msg         | PackageIncompleteError            |
| PX.Objects.SO | Msg         | PackageInvalidFileExtension       |
| PX.Objects.SO | Msg         | PackageInvalidWeight              |
| PX.Objects.SO | Msg         | PackageLineNbrMissing             |
| PX.Objects.SO | Msg         | PackageMissingCurrent             |
| PX.Objects.SO | Msg         | PackageRemoveInventoryError       |
| PX.Objects.SO | Msg         | PackageWeightAutoCalcFailedPrompt |
| PX.Objects.SO | Msg         | PackageWeightPrompt               |
| PX.Objects.SO | Msg         | PackageWrongWeightUnit            |
| PX.Objects.SO | Msg         | ShipmentConfirmedFull             |
| PX.Objects.SO | Msg         | ShipmentConfirmedPicked           |
| PX.Objects.SO | Msg         | ShipmentLineMissing               |
| PX.Objects.SO | Msg         | ShipmentMissing                   |
| PX.Objects.SO | Msg         | ShipmentQuantityMismatchPrompt    |
| PX.Objects.SO | Msg         | PackageForShipment                |
| PX.Objects.SO | Msg         | ScaleMissing                      |

| Namespace     | Simple Name                    | Name                    |
|---------------|--------------------------------|-------------------------|
| PX.Objects.SO | Msg                            | ScaleTimeout            |
| PX.Objects.IN | PIGenerator                    | locations               |
| PX.Objects.IN | INPIEntry                      | Save                    |
| PX.Objects.IN | INPIEntry                      | Cancel                  |
| PX.Objects.IN | INPIEntry                      | PIHeader                |
| PX.Objects.IN | INPIEntry                      | PIStatusItem            |
| PX.Objects.IN | INPIEntry                      | PIStatusLoc             |
| PX.Objects.IN | Messages                       | PICountInProgress       |
| PX.Objects.IN | Messages                       | PICreateAbjstment       |
| PX.Objects.IN | Messages                       | OneOrMoreExpDatelsEmpty |
| PX.Objects.IN | INAdjustmentEntry              | insetup                 |
| PX.Objects.IN | INReleaseProcess               | poreceiptcostupdate     |
| PX.Objects.IN | INIssueEntry                   | insetup                 |
| PX.Objects.IN | INReceiptEntry                 | insetup                 |
| PX.Objects.IN | INTransferEntry                | insetup                 |
| PX.Objects.FA | FABookPeriodIDAttribute        | _SelAttrIndex           |
| PX.Objects.CT | CTBillEngine                   | inventoryItemRepository |
| PX.Objects.CS | BuildingMaint                  | company                 |
| PX.Objects.GL | FinPeriodIDFormattingAttribute | _sourceFieldType        |

| Namespace     | Simple Name                    | Name                    |
|---------------|--------------------------------|-------------------------|
| PX.Objects.GL | FinPeriodIDFormattingAttribute | _defaultType            |
| PX.Objects.GL | PeriodIDAttribute              | _SearchType             |
| PX.Objects.GL | PeriodIDAttribute              | _SourceType             |
| PX.Objects.GL | OpenPeriodAttribute            | _sourceDate             |
| PX.Objects.GL | Messages                       | DeleteSubseqYears       |
| PX.Objects.GL | MasterFinPeriodMaint           | GenerateYears           |
| PX.Objects.GL | MasterFinPeriodMaint           | GenerateParams          |
| PX.Objects.AR | ARCashSaleEntry                | captureCCPayment        |
| PX.Objects.AR | ARCashSaleEntry                | authorizeCCPayment      |
| PX.Objects.AR | ARCashSaleEntry                | voidCCPayment           |
| PX.Objects.AR | ARCashSaleEntry                | creditCCPayment         |
| PX.Objects.AR | ARPaymentEntry                 | ccPaymentInfo           |
| PX.Objects.AR | ARPaymentEntry                 | captureCCPayment        |
| PX.Objects.AR | ARPaymentEntry                 | authorizeCCPayment      |
| PX.Objects.AR | ARPaymentEntry                 | voidCCPayment           |
| PX.Objects.AR | ARPaymentEntry                 | creditCCPayment         |
| PX.Objects.AR | ARPaymentEntry                 | recordCCPayment         |
| PX.Objects.AR | ARPaymentEntry                 | captureOnlyCCPayment    |
| PX.Objects.AR | CustomerPaymentMethodMaint     | createCCPaymentMethodHF |

| Namespace                                 | Simple Name                | Name   |
|---|----------------------------|--|
| PX.Objects.AR                             | CustomerPaymentMethodMaint | syncCCPaymentMethods                                   |
| PX.Objects.AR                             | CustomerPaymentMethodMaint | manageCCPaymentMethodHF                                |
| PX.Objects.AR.CCPaymentProcessing.Helpers | CCTransState               | CCState  |
| PX.Objects.AR.CCPaymentProcessing.Helpers | CCTransState               | LastTran   |
| PX.Objects.PO                             | Messages                   | LandedCostTranIsReferenced                             |
| PX.Objects.PO                             | Messages                   | LandedCostAmountRemainderCannotBeDistributedMultyLines |
| PX.Objects.PO                             | Messages                   | NoApplicableLinesForLCTransOnlyAPDocumentIsCreated     |
| PX.Objects.PO                             | Messages                   | LandedCostTran   |
| PX.Objects.PO                             | Messages                   | Print  |
| PX.Objects.PO                             | POOrderEntry               | dummy_stockitem_for_redirect_newitem                   |
| PX.Objects.PO                             | POOrderEntry               | newVendor  |
| PX.Objects.PO                             | POOrderEntry               | editVendor   |
| PX.Objects.PO                             | POOrderEntry               | newItem  |
| PX.Objects.PO                             | POOrderEntry               | editItem   |
| PX.Objects.AP                             | Messages                   | ProcessingOfLandedCostTranForAPDocFailed               |
| PX.Objects.AP                             | Messages                   | APLandedCostTranForNonLCVendor                         |
| PX.Objects.AP                             | Messages                   | APLandedCost_NoPOReceiptNumberSpecified                |
| PX.Objects.AP                             | Messages                   | PeriodHasAPDocsFromPO_LCToBeCreated                    |

| Namespace     | Simple Name       | Name                          |
|---------------|-------------------|-------------------------------|
| PX.Objects.AP | Messages          | AddPostponedLandedCost        |
| PX.Objects.AP | Messages          | LandedCostSplit               |
| PX.Objects.AP | Messages          | LandedCostTranR               |
| PX.Objects.AP | Messages          | APLandedCostTran              |
| PX.Objects.FS | InvoicingParm     | Module                        |
| PX.Objects.FS | Messages          | SUCCESS_SALES_ORDER           |
| PX.Objects.FS | SrvOrdType_PostTo | ACCOUNTS_RECEIVABLE_MODULE    |
| PX.Objects.FS | SrvOrdType_PostTo | SALES_ORDER_MODULE            |
| PX.Objects.FS | TableName         | SERVICE_CONTRACTS             |
| PX.Objects.FS | TableName         | FSX_SOLINE                    |
| PX.Objects.FS | TableName         | FSX_ARTRAN                    |
| PX.Objects.FS | TableName         | FSX_APTRAN                    |
| PX.Objects.FS | TableName         | ADDRESS                       |
| PX.Objects.FS | TableName         | CONTACT                       |
| PX.Objects.FS | Error             | NULL_OBJECT_REFERENCE         |
| PX.Objects.FS | Error             | SINGLE_SERVICE_RESTRICTION    |
| PX.Objects.FS | Error             | SRVORD_SINGLE_APPOINTMENT     |
| PX.Objects.FS | Error             | APPOINTMENT_REQUIRES_SERVICE  |
| PX.Objects.FS | Error             | APPOINTMENT_REQUIRES_EMPLOYEE |

| Namespace     | Simple Name      | Name  |
|---------------|------------------|---|
| PX.Objects.FS | Error            | APPOINTMENT_DOES_NOT_ALLOW_MULTI_EMPLOYEES                          |
| PX.Objects.FS | Error            | VALIDATE_ADDRESS_MISSING_FIELDS                                     |
| PX.Objects.FS | Error            | ADDRESS_VALIDATION_FAILED   |
| PX.Objects.FS | Error            | VENDORID_CANTBE_NULL_IF_HASVENDORWARRANTY_EQUALS_TRUE               |
| PX.Objects.FS | Error            | VENDORWARRANTYDURATION_CANTBE_NULL_IF_HASVENDORWARRANTY_EQUALS_TRUE |
| PX.Objects.FS | Error            | CPNYWARRANTYDURATION_CANTBE_NULL_IF_HASVENDORWARRANTY_EQUALS_TRUE   |
| PX.Objects.FS | Error            | CPNYWARRANTYDURATION_CANTBE_NULL_IF_HASCPTYWARRANTY_EQUALS_TRUE     |
| PX.Objects.FS | Error            | MANUFACTURERID_CANTBE_NULL_IF_EGENABLED_EQUALS_TRUE                 |
| PX.Objects.FS | Warning          | NO_VEHICLES_MATCHING_VEHICLEYPES_IN_SERVICES_IN_ROUTE               |
| PX.Objects.FS | Warning          | NO_DRIVER_TO_ASSIGN_TO_ROUTE  |
| PX.Objects.FS | Messages         | ASK_CONFIRM_APP_SO_UNCLOSING  |
| PX.Objects.FS | ExternalControls | Contact   |