

MYOB Advanced

Technical Release Notes

2021.1.1

Contents

Introduction	1
Changes in the Release	1
Platform API	1
Support for Multiple Base Currencies.....	1
Improvements in Platform DACs	3
Moved Functionality.....	3
Improvements in Request Profiler	3
Upgrade Procedure	10
Customizations and Integrations	10
Automation Steps.....	11
Upgrade Notes on Migration to the New Workflow Engine.....	11
Workflows	14
Updated Screens to Support Automation Workflows.....	14
Reference List of Changes	17
Screen API Changes.....	17
Organisation.....	17
Finance	19
Services	31
Inventory and Order Management.....	35
Commerce.....	40
Manufacturing	41
Construction	42
Database Changes.....	44
Removed Tables.....	44
Removed Columns	44
Modified Columns.....	48

Modified Indexes	51
Code Changes	53
Removed Data Access Classes	53
Removed Graphs	54
Modified Interfaces And Abstract Classes	54
Other Removed Classes	56
Removed Methods	99
Removed Fields	181
New PK and FK classes	197

Introduction

Welcome to the 2021.1.1 release of MYOB Advanced. The purpose of this document is to provide essential information on the changes included in this release that affect organisations who are involved in developing reports, customisations and integrations for the MYOB Advanced system.

Changes in the Release

Platform API

Support for Multiple Base Currencies

In MYOB Advanced 2021.1.1, several changes have been made as prerequisites for the multiple base currencies functionality, which will be implemented in a future version. This article describes the code changes that have been made. For information on the related UI changes, see “Other UI Improvements” in the MYOB Advanced 2021.1.1 Release Notes.

Note: The content below is applicable if the “Multiple Base Currencies” feature is enabled.

Changes to DACs

The BaseCuryID field has been added to the following DACs:

- PX.Data.PXAccess.Organization
The BaseCuryID field of this DAC represents the base currency of the corresponding Organization entity.
- PX.Data.PXAccess.MasterCollection.Branch
The BaseCuryID field of this DAC represents the base currency of the corresponding Branch entity.
- PX.Data.AccessInfo
The BaseCuryID field of this DAC should be used to get the default base currency of the current branch.
- PX.Objects.GL.Company
The BaseCuryID field of this DAC remains the same; when the “Multiple Base Currencies” feature is disabled, the field can be used as a source for the base currency for different kinds of documents.
- PX.Objects.GL.Branch and PX.Objects.GL.Organization
If the “Multiple Base Currencies” feature is disabled, the corresponding value from Company.BaseCuryID is copied to these fields.
If the “Multiple Base Currencies” feature is enabled, the user has to manually set the value in the **Base Currency ID** field on the Companies screen (CS101500).
- PX.Objects.CR.BAccount
The value is used for customer and supplier accounts.
- PX.Objects.AR.AR Dunning Setup
The BaseCuryID fields has been added to this DAC as a key field. If the Multiple

Base Currencies feature is enabled, the dunning letter setup depends on the branch to which the user is logged in.

- PX.Objects.CA.CashAccount

To support multiple base currencies, a customiser needs to update the generic inquiries and reports that use the DACs from this list. In order to get the base currency for generic inquiries and reports, the customiser needs to retrieve it from the PX.Objects.GL.Branch DAC.

To populate the default values of newly created documents, the customiser needs to retrieve the currency value from the PX.Data.AccessInfo DAC, which contains the base currency of the currently selected branch.

To provide the ability to support separate costs for non-stock items in different currencies, the InventoryItemCurySettings DAC has been implemented.

New Attributes

The PX.Objects.CM.CurrencyInfoAttribute attribute has been modified to set the proper BaseCuryID value for the CurrencyInfo entity.

The PX.Objects.CM.CurySymbolAttribute attribute has been developed, which allows a customiser to add a currency symbol to the UI box label. An example from the Suppliers screen (AP303000) is the following. In the PX.Objects.AP.VendorMaint.VendorBalanceSummary DAC, the Balance field has been modified to the following.

```
[CurySymbol(curyID: typeof(Vendor.baseCuryID))] [PXBaseCury()]  
[PXUIField(DisplayName = "Balance", Visible = true, Enabled = false)]  
public virtual Decimal? Balance
```

In the **AP303000.aspx** file, the **Balance** field label has been modified to the following.

```
<px:PXTextEdit ID="edBalanceLabel" runat="server" DataField="Balance_Label"  
    SuppressLabel="true" Enabled="false" IsClientControl="false" />  
<px:PXNumberEdit ID="edBBalance" runat="server" DataField="Balance"  
    SuppressLabel="true" />
```

Restrictions Related to Different Base Currencies

Because of restrictions that occur when the Multiple Base Currencies feature is enabled, users cannot use different base currencies in one document or related entities. All restrictions are implemented as graph and cache extensions with the MultipleBaseCurrenciesRestriction suffix.

Rounding Limits

Rounding limits can be defined for each currency, in addition to the base currency. The rounding limit setup implemented by the RoundingLimit field has been removed from the General Ledger Preferences screen (GL102000) and added to the Currencies screen (CM202000).

Improvements in Platform DACs

In MYOB Advanced 2021.1.1, data access classes (DACs) defined in the PX.Data namespace have been improved as follows:

- The PXSearchable attribute has been added to select DACs of the PX.Data namespace. As a result, these DACs can now be displayed in the results of the search in an instance of MYOB Advanced, and a user can now search for system entities that use these DACs by using the Search box. The Recently Viewed workspace has also been expanded to show records of these entities in addition to those that could previously be viewed on the workspace.
- Referential integrity checks have been added to select DACs of the PX.Data namespace. As the result, data consistency has been improved.
- Classes defining primary and foreign keys have been added to selected DACs of the PX.Data and PX.Objects namespaces to improve implementation of relationships between DACs.
- The Forced field has been added to the PXDBScalarAttribute class. This field indicates whether the DAC field marked with PXDBScalar is a subquery and must be used as is.

Moved Functionality

In MYOB Advanced 2021.1.1, some functionality has been moved as follows:

- The PXLogin class of the PX.Data namespace has been marked with the PXInternalUseOnly attribute, which means that this class is not intended for use by developers. Two services have been introduced that provide some of the functionality of the PXLogin class:
 - The service that implements the ILoginUIService interface: This service can be used from a customised login page to interact with the platform.
 - The service that implements the ILegacyCompanyService interface: With this service, developers can use some company-related methods that were previously available via the PXLogin class.
- Many members of the PXAccess class (which belongs to the PX.Data namespace) have been marked with the PXInternalUseOnly attribute, which means that they are not intended for use by developers. The service that implements the ICurrentUserInfoProvider interface has been introduced. This service provides the developers with some of the functionality of the PXAccess class.

Note: Some members of ICurrentUserInfoProvider are also marked with the PXInternalUseOnly attribute.

Improvements in Request Profiler

A system administrator or developer can use the Request Profiler screen (SM205070) to troubleshoot performance-related issues in MYOB Advanced. In this release, the functionality of this screen has been greatly extended and redesigned, as described in the following sections.

Default Monitoring

By default, only expensive requests and important exceptions are monitored in the system—that is, the **Default Logging (Expensive Requests and Requests with Important Exceptions)** check box is selected on the Request Profiler screen (SM205070). The system administrator may choose not to perform manual tuning of requirements and to leave

this check box selected on the Request Profiler screen, as shown in the following screenshot.

The screenshot shows the 'Request Profiler' interface. At the top right are links for 'CUSTOMISATION' and 'TOOLS'. Below these are buttons for 'REFRESH RESULTS', 'CLEAR LOG', 'EXPORT', and 'IMPORT'. A red rectangle highlights the checkbox labeled 'Default Logging (Expensive Requests and Requests with Important Exceptions)', which is currently checked. Below this, the interface is divided into four sections: 'REQUEST LOGGING' with options for 'Log Requests (Apply Filter)', 'Server Time Threshold', 'SQL Count Threshold', 'URL', and 'Username'; 'SQL LOGGING' with options for 'Log SQL (Apply Filter)', 'Row Count Threshold', 'SQL Time Threshold', 'Executed by Method', and 'Include Cached SQL Results'; 'EXCEPTIONS LOGGING' with a 'Log Exceptions' checkbox; and 'EVENT LOGGING' with a 'Log Events (Apply Filter)' checkbox, 'Log Level', and 'Category' dropdowns.

If the **Default Logging (Expensive Requests and Requests with Important Exceptions)** check box is selected, the system logs only the following requests and exceptions:

- The requests that comply with either of the following criteria:
 - The request type is Screen, UI, UI-GI, or UI-Reports, and the request has a server time of more than 20 seconds.
 - The request is of any type with a server time of more than 60 seconds.
- The following exceptions:
 - `NullReferenceException`
 - `ThreadAbortException`
 - `ArgumentNullException`
 - `ArgumentOutOfRangeException`
 - `IndexOutOfRangeException`


For default logging, the logged information is displayed on the Requests, SQL, and Exceptions tabs; the Event Log tab remains empty. These four tabs replace the table that displayed the list of logged requests in previous versions of MYOB Advanced.

With the improved filtering in the Summary area of the Request Profiler screen, the system administrator or developer can configure logging requirements more precisely.


Troubleshooting a Particular Process

If a particular process, such as the release of a document or the import of a document, takes more time than usual, the system administrator or developer can troubleshoot the process by turning on the logging of URL requests, SQL queries, exceptions, and warnings and errors; this is done directly on the screen where the process is initiated.

To turn on the logging, the system administrator or developer clicks **Tools > Profiler** on the screen title bar and clicks **Start Logging** in the Profiler window, as shown in the following screenshot. The Request Profiler starts logging URL requests, SQL queries, exceptions, and warnings and errors.

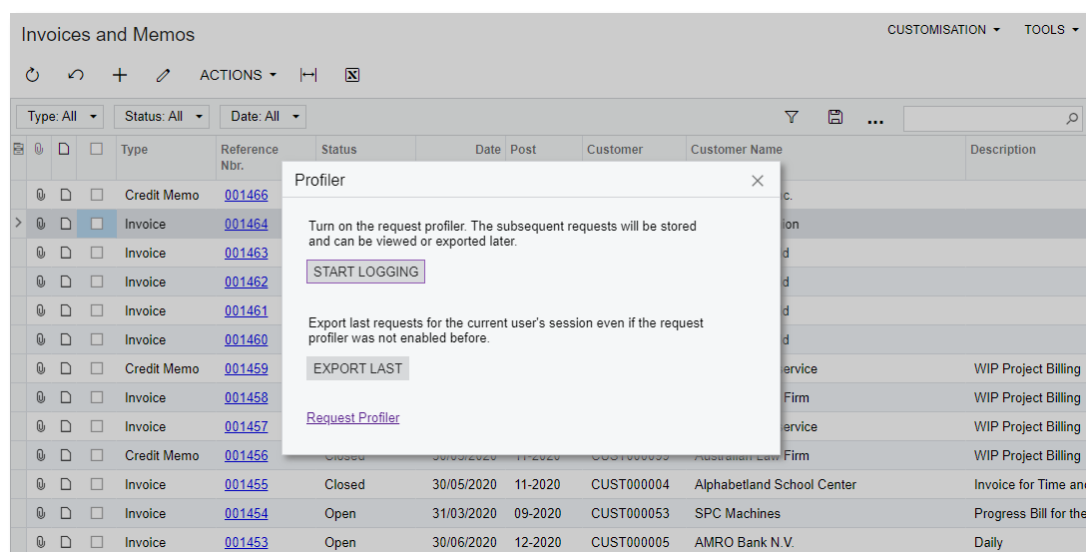

The system administrator reproduces the issue and clicks **Stop and Export** in the Profiler window, as shown in the following screenshot. The Request Profiler returns to the default monitoring and exports a ZIP archive with the log files that contain information in JSON format about the performed URL requests, SQL requests, and stack trace.

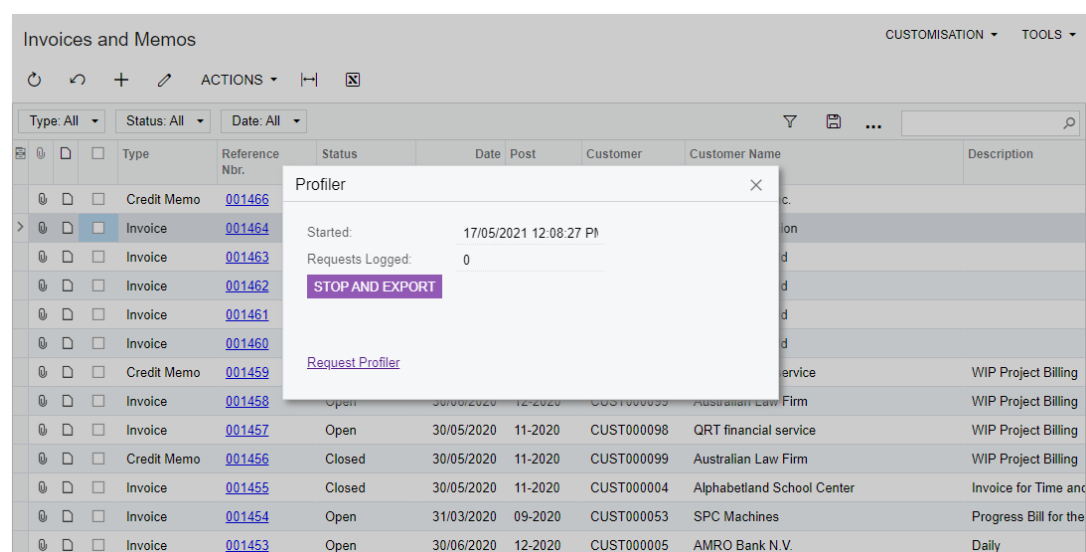

The system administrator or developer can import the ZIP archive to another MYOB Advanced instance by clicking **Import** on the screen toolbar of the Request Profiler screen (SM205070) and review the logged information.

For an issue that has just occurred, the system administrator can click **Export Last** in the Profiler window to export the most recent requests for the current user's session even if the Request Profiler was not enabled before the issue occurred.

Analysis of URL Requests

In the Request Logging section of the Request Profiler screen (SM205070), the system administrator or developer can turn on the monitoring of all URL requests by selecting the **Log Requests (Apply Filter)** check box. If only specific URL requests should be monitored, the system administrator can specify additional filtering criteria by using the settings of this section. The system displays the list of the logged requests on the Requests tab of the Request Profiler screen.

The system administrator or developer can work with logged requests on this tab as follows:

- Review detailed information about the SQL queries within the particular URL request that is currently selected in the table (by selecting a request on this tab and then clicking View SQL on the table toolbar).
- Review detailed information about the events that occurred within the particular URL request that is currently selected in the table (by selecting a request on this tab and then clicking **View Event Log** on the table toolbar).
- Open the MYOB Advanced screen specified in the URL column of the selected request (by selecting a particular request on this tab and then clicking **Open URL** on the table toolbar).
- Pin particular requests to keep them for further review (by selecting a request to be pinned on this tab and then clicking **Pin/Unpin** on the table toolbar). If the system administrator or developer clears the log by clicking **Clear Log** on the screen toolbar, the pinned requests remain in the list.
- Export all requests from the Requests tab to an Excel file (by clicking **Export to Excel** on the table toolbar).

On the Requests tab, the system administrator or developer can see only the completed requests. To view the requests that are currently executing, the system administrator can open the Requests in Progress tab of the System Monitor screen (SM201530). For the requests in progress, the same information is available as the information for the completed request on the Requests tab of the Request Profiler screen.

Analysis of SQL Queries

If URL request monitoring is activated on the Request Profiler screen, then in the SQL Logging section of the Summary area of the screen, the system administrator or developer can also turn on the monitoring of SQL queries within the monitored URL requests by selecting the **Log SQL (Apply Filter)** check box.

If only specific SQL queries should be monitored, the system administrator or developer can specify additional requirements by using the filtering settings of this section. For example, if the **Include Cached SQL Results** check box is selected, the system will include SQL queries that obtain results from a query cache (that is, not from the database) in the log. If a keyword (such as a method name) is specified in the **Executed by Method** field, the system will include in the log only the SQL queries for which the stack trace includes the specified keyword.

The system displays the list of the logged SQL queries on the SQL tab of the screen. On this tab, the system administrator or developer can review the logged SQL queries that comply with the specified filters. The same SQL query may be triggered by multiple URL requests with different parameters. The table displays aggregated information for each query.

When the system administrator or developer clicks a link in the **Statement ID** column for an SQL query, the system opens the SQL Details window with detailed information about each execution of the SQL query, as the following screenshot demonstrates.

The screenshot shows the 'Request Profiler' application with the 'SQL Details' window open. The window displays aggregated information for a specific SQL query (Statement ID: 1545830100). The table below lists the execution details for this query.

Start Time	Params	SQL Time, ms	Row Count	URL	Command Target	Command Name	Stack Trace
14 May 10:27:3	declare @P0 as nvarchar(5) = 'AUD'	32.72	1	~/frames/default.aspx	HTML	at P...	
14 May 10:27:3	declare @P0 as nvarchar(5) = 'AUD'	0.52	1	~/frames/default.aspx	HTML	at P...	
14 May 10:27:5	declare @P0 as nvarchar(5) = 'AUD'	28.86	1	~/frames/default.aspx	HTML	at P...	
17 May 09:51:0	declare @P0 as nvarchar(5) = 'AUD'	11.95	1	~/frames/default.aspx	HTML	at P...	
17 May 09:51:4	declare @P0 as nvarchar(5) = 'AUD'	16.96	1	~/frames/default.aspx	HTML	at P...	
17 May 09:52:0	declare @P0 as nvarchar(5) = 'AUD'	24.76	1	~/frames/default.aspx	HTML	at P...	

Below the table, the SQL query is displayed: `DECLARE @P0 AS NVARCHAR (5) = 'AUD';`

The system administrator or developer can export all SQL requests from the SQL tab to an Excel file (by clicking **Export to Excel** on the table toolbar).

The system administrator or developer can analyse SQL queries in depth on the SQL Analysis inquiry screen (SM405000). The system administrator or developer can use this screen to review all information about executed SQL queries, export data to an Excel file, and build pivot tables and diagrams based on this data. The All Records tab of the screen displays all information about executed SQL queries. For each record in the table, the system administrator or developer can view SQL details and stack traces on the side panels, as shown in the following screenshot.

The screenshot shows the 'SQL Analysis' screen with the 'ALL RECORDS' tab selected. The main table lists records with columns for Command Name, URL, and Command Target. A side panel titled 'SQL Analysis Stack' displays a detailed stack trace for a selected record, showing SQL Time in milliseconds and the corresponding stack trace frames.

SQL Time, ms	Stack Trace
39.87	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
6.55	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
5.78	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
5.05	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
2.15	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
1.80	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
1.44	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.85	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.74	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.73	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.72	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.64	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.61	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.55	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.52	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.45	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.44	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...
0.43	at PX.Common.PXStackTrace.GetStackTrace(Int32 skipFrames...


On the Pivot tab of the screen, for each URL request, the system administrator or developer can review the detailed information about execution of SQL requests, such as the following:

- The total number of SQL requests
- The text of SQL requests
- The number of executions of each SQL request
- The percentage of time that the execution of SQL request takes

Exception Analysis

By selecting the **Log Exceptions** check box in the Exceptions Logging section, the system administrator or developer can turn on the logging of exceptions. The system displays the list of the logged exceptions on the Exceptions tab of the screen. By using this tab, the system administrator or developer can review the list of exceptions that have occurred during the processing of requests.

When the system administrator or developer selects a particular exception on this tab and then clicks **View Exception Details** on the table toolbar, the system opens the View Exception Details window with detailed information about the selected exception, as the following screenshot demonstrates.

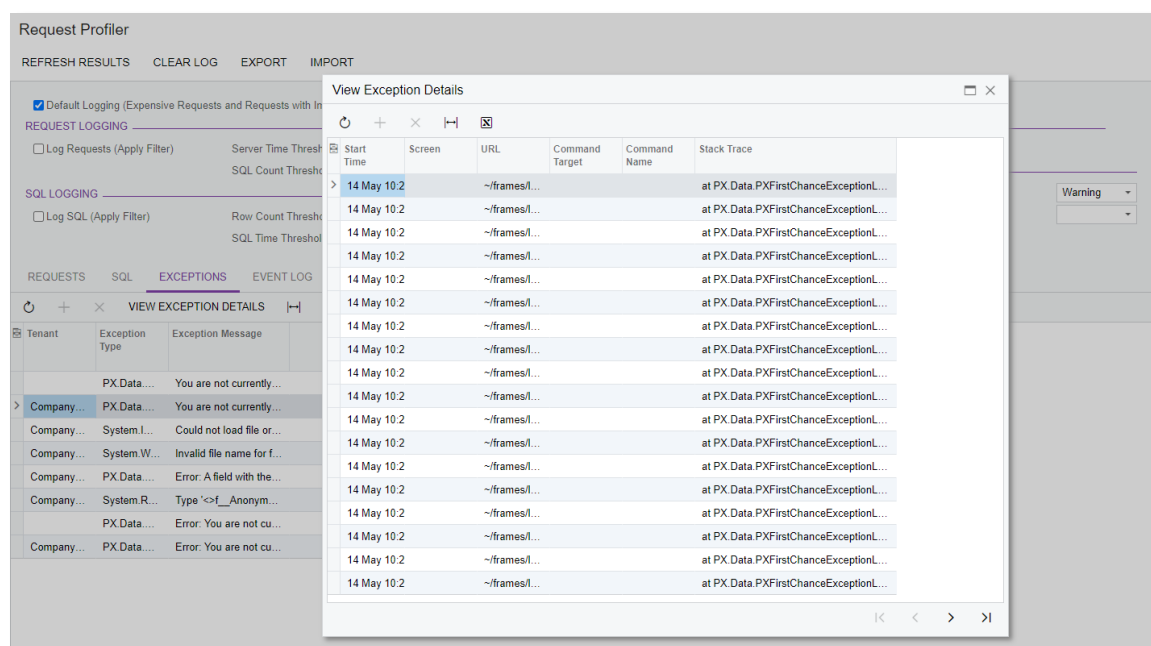

The system administrator or developer can export all exceptions from the Exceptions tab to an Excel file (by clicking **Export to Excel** on the table toolbar).

Analysis of Events

In previous versions of MYOB Advanced, the system administrator or developer could turn on the monitoring of events on by adding a specific parameter to the web.config file, which required restarting of the application. This release adds the ability to turn on the monitoring of events and to review logged information to the Request Profiler screen (SM205070).

With the settings of the Event Logging section of the Summary area of the Request Profiler screen, the system administrator or developer can also turn on the logging of events with a specific severity level by selecting the level in the Log Level field. The system administrator or developer can filter the events that the system should log by category by selecting one option or multiple options in the **Category** field. The system displays the list of the logged events on the Event Log tab of the screen. By using this tab, the system administrator or developer can review the list of events that occurred during request processing.

When the system administrator or developer clicks an event on the tab and then clicks **View Event Details** on the table toolbar, the system opens the View Event Details window with detailed information about the selected event. The system administrator or developer can export all events from the Event Log tab to an Excel file (by clicking Export to Excel on the table toolbar).

Upgrade Procedure

Customizations and Integrations

Multiple changes have been made since the last major release that may affect reports, customizations, and integrations that have been implemented by developers for prior versions of MYOB Advanced. The complete list of these changes is provided in the “Reference List of Changes” section on page 17. The following sections describe additional recommendations about the possible approaches that a developer can use to prevent issues with the implemented solutions.

To prevent breaking changes in the customizations, the developer should do the following:

1. Analyse the customization projects.
2. Carefully read the list of breaking changes in the “Reference List of Changes” section.
3. Replace the changed objects with their alternatives.
4. If the objects used in the customization projects have been removed and no alternatives have been provided, consider creating new customization projects.

Before an upgrade to MYOB Advanced 2021.1.1, to detect the changes that break existing customization projects, the developer can check the compatibility of the code included in all published customization projects with the new code of MYOB Advanced. For details, see “To Validate the Compatibility of the Published Customization with a New Version Before an Upgrade” in the MYOB Advanced Customization Guide.

Note: The validation that detects breaking changes is turned on by default in MYOB Advanced 2021.1.1. If any errors occur during the validation, the developer can refer to “To Resolve an Issue Discovered During the Validation” in the Customization Guide.

Updating the Search Index

During the upgrade, the search index may become outdated. To update the search index, a system administrator needs to rebuild the entity index after the database upgrade by doing the following:

1. Opening the Rebuild Full-Text Entity Index screen (SM209500).
2. On the screen toolbar, clicking **Process All**.

This process rebuilds the content of the DACs available for search and stores it in the specific screen prepared for search queries in the SearchIndex database table.

Changes in the PX.Objects.IN namespace

Customization projects that reference the PX.Objects.IN namespace in PX.Objects.dll should be recompiled.

Overridden event handlers for graphs in PX.Objects.IN namespace should be replaced with generic ones.

Changes to Activity Logging

Developers who create customization projects involving activities of employees need to consider minor enhancements which have been made to the logging of activities of a user. In previous versions of MYOAB Advanced, if a user logged an email activity by using the MYOAB Advanced add-in for Outlook, this activity was associated with a business account record of an employee on the Business Accounts screen (CR303000). Starting in MYOAB Advanced 2021.1.1, an email activity is associated with the contact record on the Contacts screen (CR302000) associated with an employee.

Automation Steps

Upgrade Notes on Migration to the New Workflow Engine

In MYOAB Advanced 2021.1.1, the screens of the Finance and Order Management functional areas have been rewritten to support the new automation workflows. These screens no longer support automation steps. For the complete list of updated screens, see “New Workflow Support on Finance Screens” and “New Workflow in Order Management Documents” in the MYOAB Advanced 2021.1.1 Release Notes.

This section contains information on how to upgrade from the automation steps to the new workflow engine.

Upgrade Procedure

We recommend that the customiser perform the upgrade procedure as follows:

1. Have a separate site with the MYOAB Advanced version from which the upgrade is occurring, with a production site backup. Alternatively, import the automation steps to the site by copying the automation definition from the production site.
2. Upgrade a sandbox.
3. Configure a workflow on the sandbox, and make sure the documents (sales orders, shipments, and invoices) have the same behaviour as they have in the version from which the upgrade is occurring.
4. Export the resulting customization with the workflow.
5. Upgrade the production site.
6. Publish the customization with the workflow.

Important Post-Upgrade Steps

The customiser needs to perform the following steps, each of which is described below, to resolve possible issues after the upgrade:

1. Create a customization project
2. Configure the default settings for the screen
3. Configure the workflow
4. Publish the customization

Step 1: Creating a Customization Project

The customiser needs to create a customization project to customize the affected screen by using the Workflow Editor as follows:

On the Customization Projects screen (SM204505), create a customization project, and open it in the Customization Project Editor.

Click **Screens** in the navigation pane. The Customised Screens page opens. On the page toolbar, click **Add Screen > Customize Existing Screen**, and select the affected screen (form).

Step 2: Configuring the Default Settings for the Screen

The customiser can configure field properties, conditions, and actions for a specific screen, such as for the Invoices and Memos screen (AR301000). Depending on the business processes of the company, the customiser may need to create multiple workflows. For each workflow, the customiser configures the properties of actions and fields for every state. These properties determine the appearance of the screen in a certain state. Conditions can be used in the properties of actions and fields at the screen level. At the workflow level, conditions can be used to determine transitions, so that the transitions are performed only when the conditions are fulfilled. Also, conditions can be used to determine actions, so that the actions are performed automatically when the conditions are fulfilled.

The customiser can configure the action and field properties for a screen and its workflows at the same time. These properties indicate whether a field is visible, enabled, or required, and whether an action is visible or enabled, depending on the conditions specified for a screen in any state or in a particular state.

If a field is disabled, hidden, or required at the workflow level or at the screen level, it becomes disabled, hidden, or required, respectively, on the screen. If an action is disabled or hidden at one of these levels, it becomes disabled or hidden, respectively, on the screen.

The customiser should configure the settings of the screen as follows:

1. Determine the necessary workflow conditions, and specify and configure them on the Conditions page of the customised screen. In the old automation engine, conditions defined the state of a document. In the new workflow engine, a state in the workflow is defined by the status of the document. Therefore, it is not necessary to configure in the new workflow engine all the conditions that were configured in the automation steps.

Note: In the new workflow engine, the customiser needs to configure each unique condition only once, because the conditions can be reused in different transitions, actions, and field properties.

2. On the Actions page of the customised screen, configure the actions that had been specified on the Actions tab of the Automation Steps (SM205000) screen (for details, see To Configure Actions) as follows:
 - a. Click **Reorder Actions** to configure the default order of each Toolbar Folder option.
 - b. In the Action Properties window:
 - i. From the **Disabled** or **Hidden** drop-down list, select the conditions under which the actions should be disabled or hidden, respectively.

- ii. For the actions with a **Processing Screen** value specified, select or clear the **Batch Mode** check box to ensure that each record is processed in a batch or separately, respectively.
 - iii. From the **Toolbar Folder** drop-down list, select a folder in which the actions should be shown by default.
3. On the Fields page of the customised screen, configure the fields that were specified on the Fields tab of the Automation Steps (SM205000) screen (for details, see To Modify Field Properties) as follows:
 - a. From the **Disabled**, **Enabled**, and **Required** drop-down lists, select the conditions under which the actions should be disabled, hidden, or required, respectively.
 - b. Click **Combo Box Values** to configure the default combo box values.

Note: To restore combo box values that were defined before the upgrade, the customiser should add new combo box values with exactly the same **Value** and **Description** as had been specified for the fields customised in the automation steps. Thus, the values of document fields will reappear after the customization is published.

Step 3: Configuring the workflow

The customiser should configure the workflow as follows:

1. In the navigation pane of the Customization Project Editor, click Workflows under the screen node to be customised. The Workflows page opens. For details on how to customize a predefined workflow with the changes that were made in the previous versions, see To Customize a Predefined Workflow under To Add a Workflow.

Note: The customiser can copy the system workflow instead of extending it, or create a simple workflow.

2. The states should be customised in the same way the statuses had been customised in the automation steps of the previous version. The customiser should do the following:
 - a. In the Fields table of the State Properties tab, configure the fields that had been specified on the Fields tab of the Automation Steps screen. To specify the field properties for the state, the customiser needs to select a field, and select or clear the **Disabled**, **Enabled**, and **Required** check boxes.
 - b. Configure the actions that had been specified on the Actions tab of the Automation Steps screen. The customiser needs to select the actions that should be enabled for the selected state, as described in Instruction 2 of . Alternatively, the customiser can create new actions on this tab by clicking Create Action.

Note: To restore the statuses that were defined in the system before the upgrade, the customiser should add a new state. In the Add State dialog box, the customiser needs to specify the **State Identifier** and **Description** for the state. These values should be exactly the same as the **Value** and **Description**, respectively, that had been specified in the **Status** field of the Combo Box Values window in the automation steps. The statuses of the documents will reappear after the customization is published.

3. The customiser should customize each transition as follows:
 - a. Select the **Target State** for the transition.
 - b. In the Fields to Update After Transition table, define the fields that should be updated after the transition.

- c. Optional: From the **Condition** drop-down list on the Transitions Properties tab, select the condition created in step 1.
4. The customiser should use arrows in the States and Transitions pane to arrange the states and transitions in the required order, and save the changes.
Alternatively, the customiser can click Diagram View to switch to the diagram view of the workflow and then arrange states and transitions there.

Step 4: Publishing the Customization

The customiser then publishes the customization by clicking **Publish > Publish Current Project** in the Customization Project Editor or by clicking **Publish** on the Customization Projects screen (SM204505).

After the customization is published, the issues should be resolved. If users still experience problems, the customiser should review the customization steps of the workflow.

Workflows

Updated Screens to Support Automation Workflows

In MYOB Advanced 2021.1.1, a variety of screens have been changed to support the new automation workflows. On these screens, the **Hold** check box has been removed, the menu actions have been rearranged, and the buttons representing the actions that are most relevant to the current status of the document are displayed directly on the screen toolbar, in addition to being included as menu commands on the Actions menu. Other related changes have been made as well. These changes affect the automation steps, customizations, and import and export scenarios related to these screens.

The following sections contain information about the updated screens, including links you can click for additional information, and provide upgrade recommendations, if applicable.

Changes to Service-Related Workflows

A new hidden **Workflow Type** field has been added to the following screens related to services:

- Service Orders (FS300100)
- Appointments (FS300200)

Also, on the Service Order Types screen (FS202300), the following visible fields have been added:

- **Service Order Workflow Type**
- **Appointment Workflow Type**

On this screen, if a customiser changes the value in the **Service Order Workflow Type** or **Appointment Workflow Type** field, new service orders and appointments of the service order type will be created with the specified workflow type, and old documents of the service order type will maintain the old workflow type. To update old documents, a customiser should create a customization project to make the **Workflow Type** element visible and manually modify its value on the Service Orders and Appointments screens. The status of the document should be present in the new workflow to allow the transition between states of documents.

If the organization uses automation steps, import scenarios, or export scenarios for any of these screens, users that work on customizations will need to redesign the automation of the processes related to the applicable screens by using the new workflow engine.

Changes to Project-Related Workflows

For the list of updated screens related to project accounting, see “New Workflow Support on Project Entry Screens” in the MYOB Advanced 2021.1.1 Release Notes.

If the organization uses automation steps for any of these screens, users that work on customizations will need to redesign the automation of the processes related to the applicable screens by using the new workflow engine. Import and export scenarios that use the **Status** field should be updated. We recommend that import and export scenarios that use the **Hold** field be updated as well.

Changes to Finance-Related Workflows

For the list of updated finance-related screens, see “New Workflow Support on Finance Screens” in the MYOB Advanced 2021.1.1 Release Notes.

For the screens in the Payables and Receivables workspaces, it is not possible to configure the new workflow by using the Customization Project Editor. The customiser should use code customization instead.

For the screens in the Payables and Receivables workspaces, it is not possible to configure the new workflow by using the Customization Project Editor. The customiser should use code customization instead.

Also, the following screens have been reworked to support the new workflow engine:

- Customers (AR303000)
- Suppliers (AP303000)
- Customer Locations (AR303020)
- Supplier Locations (AP303010)

If the organization uses automation steps for any of the screens listed in this section, users that work on customizations will need to redesign the automation of the processes related to the applicable screens by using the new workflow engine. For the screens listed in “New Workflow Support on Finance Screens” in the MYOB Advanced 2021.1.1 Release Notes, no changes to import and export scenarios are required. For the Customers, Suppliers, Customer Locations, and Supplier Locations screens, import and export scenarios that use the **Status** element should be updated.

Changes to CRM-Related Workflows

The following CRM-related screens have been reworked to support the new workflow engine:

- Business Accounts (CR303000)
- Update Business Accounts (CR503320)
- Account Locations (CR303010)
- Contacts (CR302000)

For details, see “New Workflows for Business Accounts, Customers, Suppliers, and Locations” and “Enhancements Related to Contacts and Employees” in the MYOB Advanced 2021.1.1 Release Notes.

If the organization uses automation steps for any of these screens, users that work on customizations will need to redesign the automation of the processes related to the

applicable screens by using the new workflow engine. Import and export scenarios that use the Status element should be updated.

Changes to Manufacturing-Related Workflows

The following screens related to manufacturing have been reworked to support the new workflow engine:

- Engineering Change Request (AM210000)
- Engineering Change Order (AM215000)

Also, the Supplier Shipments screen (AM310000) uses the new workflow engine for the Reports menu.

If the organization uses automation steps, import scenarios, or export scenarios for any of these screens, users that work on customizations will need to redesign the automation of the processes related to the applicable screens by using the new workflow engine. Existing workflows can be customised in the Customization Project Editor or by extending graphs and workflows in the PX.Objects.AM namespace. Also, actions of the new workflows can be used through the contract-based API.

Changes to Distribution-Related Workflows

The following distribution-related screens have been reworked to support the new workflow engine:

- Receipts (IN301000)
- Transfers (IN304000)
- Adjustments (IN303000)
- Kit Assembly (IN307000)
- Issues (IN302000)

If the organization uses automation steps for any of these screens, users that work on customizations will need to redesign the automation of the processes related to the applicable screens by using the new workflow engine. No changes to import and export scenarios are required.

Reference List of Changes

Screen API Changes

Organisation

This section lists the fields, actions, and containers that have been renamed on the organization screens or removed from these screens.

Renamed Fields, Actions, and Containers

Screen	Old Name	New Name
Business Accounts (CR303000)	ExtendToCustomerAction	ExtendToCustomer
Daily Field Report (PJ304000)	IncomingMailProcessingMainProcessing.AttachToBusinessAccountOrContactOrLead	IncomingMailProcessingMainProcessing.AssociateWithContact
Revised Contract vs Approved CO GI (PMGI0040)	Rev Contract And COAmt	Revised Contract/Change Order Amount

Removed Fields, Actions, and Containers

Screen	Name	Comment
Business Accounts (CR303000)	Type	
Daily Field Report (PJ304000)	LaborTimeAndActivities.Owner LaborTimeAndActivities.Contact Hold checkbox	New workflow actions should be used instead.
Customer Management Preferences (CR101000)	RequireUniqueEmailAddressOnContactValidation	

Code Changes

The `PX.Objects.EP.MailProcessingIsTurnedOff` field is replaced by the `PX.SM.MailProcessingIsTurnedOff` field.

The Status field of the BAccount DAC and its inheritors is split into the two statuses: **Customer Status** (the `BAccount.Status` field) and **Supplier Status** (the `BAccount.VStatus` field). The corresponding values and ListAttribute of the BAccount DAC and its inheritors are moved inside the CustomerStatus and VendorStatus classes.

In the `PX.TM.SubordinateAndWingmenOwnerAttribute` class, the following construction method:

`SubordinateAndWingmenOwnerAttribute()`

has been replaced with the following method:

`SubordinateAndWingmenOwnerAttribute(bool validateValue = false, bool inquiryMode = true, Type[] fieldList = null, string[] headerList = null)`

Finance

This section lists the fields, actions, and containers that have been renamed on the finance screens or removed from these screens.

Renamed Fields, Actions, and Containers

Screen	Old Name	New Name
Invoices and Memos (AR301000)	CreditHold	PutOnCreditHold
	EmailInvoiceMemoAction	EmailInvoice
	EnterPaymentApplyMemoAction	PayInvoice
	ReverseAction	ReverseInvoice
	ReverseAndApplyToMemoAction	ReverseInvoiceAndApplyToMemo
	AddToScheduleAction	CreateSchedule
	ReclassifyGLBatchAction	ReclassifyBatch
	CustomerDetailsInquiry	CustomerDocuments
	AREditDetailedReport	PrintAREdit
	ARRegisterDetailedReport	PrintARRegister
	PrintInvoiceMemoReport	PrintInvoice
	CreditHold	PutOnCreditHold
	ViewProFormalInquiry	ViewProformalInquiry
	ViewProjectTransactionsInquiry	ViewPMTransInquiry
	FinancialDetailsTaxInfo.CustomerUsageType	EntityUsageType
Payments and Applications (AR302000)	CustomerDetailsInquiry	CustomerDocument
	AREditDetailedReport	PrintAREdit
	ARRegisterDetailedReport	PrintARRegister
Cash Sales (AR304000)	ReclassifyGLBatchAction	ReclassifyBatch
	CustomerDetailsInquiry	CustomerDocument
	AREditDetailedReport	PrintAREdit
	ARRegisterDetailedReport	PrintARRegister
	ValidateAddressesAction	ValidateAddresses
	FinancialDetailsTaxInfo.CustomerUsageType	EntityUsageType

Screen	Old Name	New Name
Invoices (SO303000)	CreditHold	PutOnCreditHold
	FinancialDetailsTaxInfo.CustomerUsageType	EntityUsageType
	FinancialDetailsLinkToGL	FinancialLinkToGL
	FinancialDetailsAssignedTo	FinancialOwnership
	FinancialDetailsPrintAndEmailOptions	FinancialPrintAndEmailOptions
	FinancialDetailsTaxInfo	FinancialTaxInfo
	FinancialDetailsCashDiscountInfo	FinancialCashDiscountInfo
	FreightDetailsFreightPrice	FreightFreightPrice
	FinancialDetailsPaymentInformation	FinancialPaymentInformation
	DocumentDetails	Details
	TaxDetails	Taxes
	AddressDetailsShipToAddress	AddressesShipToAddress
	AddressDetailsShipToContact	AddressesShipToContact
	AddressDetailsBillToAddress	AddressesBillToAddress
	AddressDetailsBillToContact	AddressesBillToContact
	DiscountDetails	Discounts
	FreightDetails	Freight
	AddressDetailsShipToAddressLinkToGL	AddressesShipToAddressLinkToGL
Bills and Adjustments (AP301000)	PayBillApplyAdjustmentAction	PayInvoice
	ReverseAction	ReverseInvoice
	AddToScheduleAction	CreateSchedule
	ReclassifyGLBatchAction	ReclassifyBatch
	VendorDetailsInquiry	VendorDocuments
	APEditDetailedReport	PrintAPEdit
	APRegisterDetailedReport	PrintAPRegister
Checks and Payments (AP302000)	APEditDetailedReport	PrintAPEdit
	APDocumentRegisterDetailedReport	PrintAPRegister
	APPaymentRegisterReport	PrintAPPayment

Screen	Old Name	New Name
Quick Checks (AP304000)	ReclassifyGLBatchAction	ReclassifyBatch
	VendorDetailsInquiry	VendorDocuments
	APEditDetailedReport	PrintAPEdit
	APDocumentRegisterDetailedReport	PrintAPRegister
	APPaymentRegisterReport	PrintAPPayment
Suppliers (AP303000)	CreateContactAction	CreateContact
Non-Stock Items (IN202000)	GeneralSettings	General
	GeneralSettingsItemDefaults	GeneralItemDefaults
	GeneralSettingsFieldServiceDefaults	GeneralFieldServiceDefaults
	GeneralSettingsUnitOfMeasure	GeneralUnitOfMeasure
	PriceCostInformationPriceManagement	PriceCostPriceManagement
	PriceCostInformationStandardCost	PriceCostStandardCost
	PriceCostInformationCostAccrual	PriceCostCostAccrual
	PriceCostInformationRUTAndRUTSettings	PriceCostRUTAndRUTSettings
	PriceCostInformationFieldServiceDefaults	PriceCostFieldServiceDefaults
	DeferralSettingsRules	DeferralRules
	GeneralSettingsUnitOfMeasureConversions	GeneralUnitOfMeasureConversions
	DeferralSettingsRevenueComponents	DeferralRevenueComponents
	VendorDetails	Vendors
	GeneralSettingsFieldServiceDefaultsItemClass	GeneralFieldServiceDefaultsItemClass
Stock Items (IN202500)	GeneralSettings	General
	GeneralSettingsItemDefaults	GeneralItemDefaults
	GeneralSettingsWarehouseDefaults	GeneralWarehouseDefaults
	GeneralSettingsUnitOfMeasure	GeneralUnitOfMeasure
	GeneralSettingsPhysicalInventory	GeneralPhysicalInventory
	PriceCostInfoPriceManagement	PriceCostPriceManagement
	PriceCostInfoStandardCost	PriceCostStandardCost
	DeferralSettingsRules	DeferralRules

Screen	Old Name	New Name
	GeneralSettingsUnitOfMeasureConversions	GeneralUnitOfMeasure
	DeferralSettingsRevenueComponents	DeferralRevenueComponents
	VendorDetails	Vendors
	PriceCostInfoCostStatistics	PriceCostCostStatistics
	WarehouseDetails	Warehouses
	ReplenishmentInfoReplenishmentParameters	ReplenishmentReplenishmentParameters
	ReplenishmentInfoSubitemReplenishmentParameters	ReplenishmentSubitemReplenishmentParameters
	PriceCostInfoCostStatisticsRulesRUTAndRUTSettings	PriceCostCostStatisticsRulesRUTAndRUTSetting
	PriceCostInfoCostStatisticsRules	PriceCostCostStatisticsRules
Template Item (IN203000)	GeneralSettingsItemDefaults	GeneralItemDefaults
	GeneralSettingsFieldServiceDefaults	GeneralFieldServiceDefaults
	GeneralSettingsWarehouseDefaults	GeneralWarehouseDefaults
	GeneralSettingsUnitOfMeasure	GeneralUnitOfMeasure
	GeneralSettingsPhysicalInventory	GeneralPhysicalInventory
	PriceCostInfoPriceManagement	PriceCostPriceManagement
	PriceCostInfoStandardCost	PriceCostStandardCost
	PriceCostInfoCostAccrual	PriceCostCostAccrual
	PriceCostInfoFieldServiceDefaults	PriceCostFieldServiceDefaults
	AttributeConfigurationAttributesDefaultColumnAttributeID	ConfigurationAttributesDefaultColumnAttributeID
	AttributeConfiguration	Configuration
	GeneralSettingsUnitOfMeasureConversions	GeneralUnitOfMeasureConversions
	VendorDetails	Vendors
	AttributeConfigurationAttributes	ConfigurationAttributes
	AttributeConfigurationInventoryIDSegmentSettings	ConfigurationInventoryIDSegmentSettings
	AttributeConfigurationDescriptionSegmentSettings	ConfigurationDescriptionSegmentSettings
	MatrixItemCreationColumnAttributeID MatrixItemCreationTemplateItem	ItemCreationColumnAttributeID
	MatrixItemCreation	ItemCreationTemplateItem
	MatrixItemCreationCreateMatrixItems	ItemCreation ItemCreationCreateMatrixItems
	GeneralSettingsFieldServiceDefaultsItemClass	GeneralFieldServiceDefaultsItemClass

Screen	Old Name	New Name
Warehouses (IN204000)	LocationTable AddressInformationBuildingBuilding LocationTableLocationTable AddressInformationAddressAddress AddressInformationContact	Locations AddressBuildingBuilding LocationsLocationTable AddressAddressAddress AddressContact
Warehouse Buildings (IN204010)	AddressInformationAddress	AddressAddress
Receipts (IN301000)	FinancialDetails ManufacturingDetails TransactionDetails Allocations AllocationsUnassignedQty	Financial Manufacturing Details LineDetails LineDetailsUnassignedQty
Issues (IN302000)	FinancialDetails ManufacturingDetails TransactionDetails Allocations AllocationsUnassignedQty	Financial Manufacturing Details LineDetails LineDetailsUnassignedQty
Adjustments (IN303000)	FinancialDetails ManufacturingDetails TransactionDetails	Financial Manufacturing Details
Transfers (IN304000)	FinancialDetails TransactionDetails Allocations AllocationsUnassignedQty	Financial Details LineDetails LineDetailsUnassignedQty

Screen	Old Name	New Name
Kit Assembly (IN307000)	FinancialDetails Allocations KitAllocations AllocationsUnassignedQty KitAllocationsUnassignedQty	Financial LineDetails KitLineDetails LineDetailsUnassignedQty KitLineDetailsUnassignedQty

Removed Fields, Actions, and Containers

Form	Name	Comment
Invoices and Memos (AR301000)	Hold checkbox EmailInvoiceMemoNotification DocumentDetails.ServiceAppointmentDate DocumentDetails.AppointmentNbr DocumentDetails.ServiceOrderNbr	The new actions PutOnHold and ReleaseFromHold should be used instead. The EmailInvoice action should be used instead. Use the DocumentDetails.RelatedSvcDocNbr field instead. Use the DocumentDetails.RelatedSvcDocNbr field instead.
Payments and Applications (AR302000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Cash Sales (AR304000)	Hold checkbox EmailInvoiceMemoNotification InvoiceMemoFormReport CreditHold	The new actions PutOnHold and ReleaseFromHold should be used instead. The EmailInvoice action should be used instead.
Funds Transfers (CA301000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Reconciliation Statements (CS302000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.

Form	Name	Comment
Transactions (CA304000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
	Flow	The actions are not supported in the new system workflow.
	ActivitiesInquiry	
Bank Deposits (CA305000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Journal Transactions (GL301000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Journal Transactions (GL3030PL)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Journal Voucher (GL304000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Trial Balance (GL202010)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Bills and Adjustments (AP301000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
	DocumentDetails.ServiceAppointmentDate	Equivalent to DocumentDetails.RelatedSvcDocNbr Equivalent to DocumentDetails.RelatedSvcDocNbr
	DocumentDetails.LocationID	
	DocumentDetails.AppointmentNbr	
	DocumentDetails.ServiceOrderNbr	
Checks and Payments (AP302000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Batch Payments (AP305000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Quick Checks (AP304000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.

Form	Name	Comment
Supplier Price Worksheet (AP202010)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Fixed Asset Transactions (FA301000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Fixed Assets (FA303000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Tax Adjustments (TX301000)	Hold checkbox VoidInvoiceAction action ReleaseRetainageAction action Inquiry action Reports action	The new actions PutOnHold and ReleaseFromHold should be used instead.
Currency Management Preferences (CM101000)	RealGainAcctID field RealGainSubID field RealLossAcctID field RealLossSubID field TranslationGainAcctID field TranslationGainSubID field TranslationLossAcctID field TranslationLossSubID field	
Currencies (CM202000)	Group caption "General Settings"	
Companies (CS101500)	CompanyCurrency.Description CompanyCurrency.CurySymbol CompanyCurrency.DecimalPlaces	

Form	Name	Comment
General Ledger Preferences (GL102000)	basecurrency.RoundingGainAcctID	Use the Currencies (CM202000) to define a rounding limit for currency
	basecurrency.RoundingGainSubID	
	basecurrency.RoundingLossAcctID	
	basecurrency.RoundingLossSubID	
	GeneralSettingsRoundingSettings	

Other Changes

The Approve and Reject actions of the APInvoice and APPaymentEntry graphs have been moved to ApprovalWorkflow graph extensions of these graphs.

The SetStatus method for updating a status has been removed in the following DACs because all transitions should be processed by using the system workflow:

- PX.Objects.CA.CATransfer
- PX.Objects.GL namespace, Branch, GLDocBatch, and GLTrialBalanceImportMap

In the PX.Objects.GL.GLTrialBalanceImportMap DAC, the type of the Status field has been changed to String to allow the use of the new system workflow. The constants in TrialBalanceImportMapStatusAttribute have been changed accordingly to the new type of the Status field:

- HOLD = H
- BALANCED = B
- RELEASED = R

In the CABatchEntry graph, the action delegate names have been changed to be capitalised (such as release, export). In the CATranEntry graph, the Hold, Flow, Inquiry, and Action actions have been removed from the application code.

In the ContractMaint graph, the Action and Inquiry actions have been removed from application code.

In the APDataEntry graph, the Action, Inquiry, and Reports actions have been removed from application code.

In the CAReleaseProcess and CATrxRelease graph, an additional requested parameter has been added to the ReleaseDocProc method to make it possible to define a system workflow event that is executed after the release process has completed successfully. In the PX.Objects.CS.OrganizationMaint graph, the CurrencyList_DecimalPlaces_FieldVerifying(PXCache,PXFieldVerifyingEventArgs) event handler has been removed. In the PX.Objects.CM.CMSetupMaint, the basecurrency view has been removed.

In the PX.Objects.CM.CMSetupMaint, the following event handlers have been removed:

- CMSetup_RowInserted(PXCache,PXRowInsertedEventArgs)
- CMSetupMaint.CMSetup_RowUpdated(PXCache,PXRowUpdatedEventArgs)
- Currency_RealGainAcctID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)
- Currency_RealLossAcctID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)
- Currency_TranslationGainAcctID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)
- Currency_TranslationLossAcctID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)
- Currency_CuryID_CacheAttached(PXCache)
- Currency_RevalGainAcctID_CacheAttached(PXCache)
- Currency_RevalGainSubID_CacheAttached(PXCache)
- Currency_RevalLossAcctID_CacheAttached(PXCache)
- Currency_RevalLossSubID_CacheAttached(PXCache)
- Currency_UnrealizedGainAcctID_CacheAttached(PXCache)
- Currency_UnrealizedGainSubID_CacheAttached(PXCache)
- Currency_UnrealizedLossAcctID_CacheAttached(PXCache)
- Currency_UnrealizedLossSubID_CacheAttached(PXCache)
- Currency_RoundingGainAcctID_CacheAttached(PXCache)
- Currency_RoundingGainSubID_CacheAttached(PXCache)
- Currency_RoundingLossAcctID_CacheAttached(PXCache)
- Currency_RoundingLossSubID_CacheAttached(PXCache)
- Currency_RealGainAcctID_CacheAttached(PXCache)
- Currency_RealLossAcctID_CacheAttached(PXCache)
- Currency_TranslationGainAcctID_CacheAttached(PXCache)
- Currency_TranslationLossAcctID_CacheAttached(PXCache)

In the PX.Objects.CM.CurrencyMaint graph, the following event handlers have been updated to a generic format:

- CurrencyList_DecimalPlaces_FieldVerifying(PXCache,PXFieldVerifyingEventArgs)
- CurrencyList_RowUpdated(PXCache,PXRowUpdatedEventArgs)
- CurrencyList_RowSelected(PXCache,PXRowSelectedEventArgs)
- CurrencyList_CuryID_CacheAttached(PXCache)
- Currency_DecimalPlaces_FieldDefaulting(PXCache,PXFieldDefaultingEventArgs)

- Currency_RowSelected(PXCache,PXRowSelectedEventArgs)
- Currency_RowPersisting(PXCache,PXRowPersistingEventArgs)
- Currency_RealGainAcctID_CacheAttached(PXCache)
- Currency_RealLossAcctID_CacheAttached(PXCache)
- Currency_RevalGainAcctID_CacheAttached(PXCache)
- Currency_RevalLossAcctID_CacheAttached(PXCache)
- Currency_ARProvAcctID_CacheAttached(PXCache)
- Currency_APProvAcctID_CacheAttached(PXCache)
- Currency_TranslationGainAcctID_CacheAttached(PXCache)
- Currency_TranslationLossAcctID_CacheAttached(PXCache)
- Currency_UnrealizedGainAcctID_CacheAttached(PXCache)
- Currency_UnrealizedLossAcctID_CacheAttached(PXCache)
- Currency_RoundingGainAcctID_CacheAttached(PXCache)
- Currency_RoundingLossAcctID_CacheAttached(PXCache)

In the PX.Objects.GL.GLSetupMaint graph, the following event handlers have been removed:

- Currency_TranslationGainAcctID_CacheAttached(PXCache)
- Currency_TranslationGainSubID_CacheAttached(PXCache)
- Currency_TranslationLossAcctID_CacheAttached(PXCache)
- Currency_TranslationLossSubID_CacheAttached(PXCache)
- Currency_RealGainAcctID_CacheAttached(PXCache)
- Currency_RealGainSubID_CacheAttached(PXCache)
- Currency_RealLossAcctID_CacheAttached(PXCache)
- Currency_RealLossSubID_CacheAttached(PXCache)
- Currency_RowSelected(PXCache,PXRowSelectedEventArgs)
- Currency_RowPersisting(PXCache,PXRowPersistingEventArgs)
- Currency_RoundingGainAcctID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)
- Currency_RoundingLossAcctID_FieldUpdated(PXCache,PXFieldUpdatedEventArgs)
- Currency_RevalGainAcctID_CacheAttached(PXCache)
- Currency_RevalGainSubID_CacheAttached(PXCache)
- Currency_RevalLossAcctID_CacheAttached(PXCache)
- Currency_RevalLossSubID_CacheAttached(PXCache)

- Currency_UnrealizedGainAcctID_CacheAttached(PXCache)
- Currency_UnrealizedGainSubID_CacheAttached(PXCache)
- Currency_UnrealizedLossAcctID_CacheAttached(PXCache)
- Currency_UnrealizedLossSubID_CacheAttached(PXCache)
- Currency_RoundingGainAcctID_CacheAttached(PXCache)
- Currency_RoundingGainSubID_CacheAttached(PXCache)
- Currency_RoundingLossAcctID_CacheAttached(PXCache)
- Currency_RoundingLossSubID_CacheAttached(PXCache)

In the PX.Objects.AR.Messages and PX.Objects.AP.Messages classes, the useless message Only_Invoices_MayBe_Payed has been removed.

In the FADetails class, the set_Hold method has been removed. The Hold check box status is calculated based on a fixed asset status. All status transitions are processed over the system workflow.

In the APInvoiceEntry graph, the FADetails_Hold_FieldVerifying and FADetails_Hold_FieldUpdated event handlers have been removed.

The new optional parameter named reportID has been added to the following actions which execute a report:

- PrintInvoice(PXAdapter) in the PX.Objects.SO.SOInvoiceEntry graph
- AREdit(PXAdapter) in the PX.Objects.SO.SOInvoiceEntry graph
- BatchRegisterDetails(PXAdapter) in the PX.Objects.GL.JournalEntry graph
- GLEditDetails(PXAdapter) in the PX.Objects.GL.JournalEntry graph
- GLReversingBatches(PXAdapter) in the PX.Objects.GL.JournalEntry graph
- PrintDepositSlip(PXAdapter) in the PX.Objects.CA.CADepositEntry graph
- PrintReconciliationReport(PXAdapter) in the PX.Objects.CA.CAReconEntry graph
- PrintInvoice(PXAdapter) in the PX.Objects.AR.ARCashSaleEntry graph
- PrintAREdit(PXAdapter) in the PX.Objects.AR.ARDataEntryGraph<TGraph,TPPrimary> graph
- PrintARRegister(PXAdapter) in the PX.Objects.AR.ARDataEntryGraph<TGraph,TPPrimary> graph
- PrintInvoice(PXAdapter) in the PX.Objects.AR.ARInvoiceEntry graph
- PrintAPEdit(PXAdapter) in the PX.Objects.AP.APInvoiceEntry graph
- PrintAPRegister(PXAdapter) in the PX.Objects.AP.APInvoiceEntry graph
- PrintAPEdit(PXAdapter) in the PX.Objects.AP.APPaymentEntry graph
- PrintAPRegister(PXAdapter) in the PX.Objects.AP.APPaymentEntry graph
- PrintAPPayment(PXAdapter) in the PX.Objects.AP.APPaymentEntry graph

- PrintAPEdit(PXAdapter) in the PX.Objects.AP.APQuickCheckEntry graph
- PrintAPRegister(PXAdapter) in the PX.Objects.AP.APQuickCheckEntry graph
- PrintAPPayment(PXAdapter) in the PX.Objects.AP.APQuickCheckEntry graph

In the Prepare Payments screen (AP503000), the IndicateAmountsToPayVendorID and IndicateAmountsToPay containers were re-created to remove the SyncPosition property from the grid. Synchronization is now done using PXFilter.

The public property public Type AccountFieldType { get; set; } has been moved from obsolete class named APActiveProjectAttribute (which had a typo in its name) to its base class named APActiveProjectAttribute. Use the APActiveProjectAttribute class instead of the obsolete APActiveProjectAttribute class.

Services

This section lists the fields, actions, and containers that have been renamed on the services screens or removed from these screens.

Renamed Fields, Actions, and Containers

Form	Old Name	New Name
Customer Location Central (FS404050)	Services.ServiceOrderDetailsRefNbr	Services.ServiceOrderDetailRefNbr
	PickupDeliveryItems.ServiceOrderDetailsRefNbr	PickupDeliveryItems.ServiceOrderDetailRefNbr
Inventory Updates (FS500500)	Appointments.ServiceOrderDetailsRefNbr	Appointments.ServiceOrderDetailRefNbr
Service Orders (FS300100)	DefaultStaff.ServiceRefNbr	DefaultStaff.DetailRefNbr
	CompleteOrderActionsMenu	CompleteOrderAction
	CancelOrderActionsMenu	CancelOrderAction
	ReopenOrderActionsMenu	ReopenOrderAction
	CloseOrderActionsMenu	CloseOrderAction
	UncloseOrderActionsMenu	UncloseOrderAction
	InvoiceOrderActionsMenu	InvoiceOrderAction
	ConvertToServiceOrderActionsMenu	CopyToServiceOrderAction
	CreatePurchaseOrderActionsMenu	CreatePurchaseOrderAction
	AllowBillingActionsMenu	CreatePurchaseOrderAction
	ScheduleAppointmentActionsMenu	ScheduleAppointmentAction

Form	Old Name	New Name
	ValidateAddressActionsMenu	ValidateAddressAction
	OpenEmployeeBoardActionsMenu	OpenEmployeeBoardActio
	OpenUserCalendarActionsMenu	OpenUserCalendarAction
	RecalcExternalTaxActionsMenu	OpenEmployeeBoardAction
	OpenBatch	OpenPostBatch
	ConvertToServiceOrder	CopyToServiceOrder
	OpenINPostingDocument	OpenPostingDocument
	Allocations	LineDetails
	OtherInformationBillingInfo	BillingDocuments
	ProcessServiceOrderServiceOrderActions.CompleteOrder	ProcessServiceOrderServiceOrderActions.Complete
	ProcessServiceOrderServiceOrderActions.CloseOrder	ProcessServiceOrderServiceOrderActions.Close
	ProcessServiceOrderServiceOrderActions.RunServiceOrderBilling	ProcessServiceOrderServiceOrderActions.RunBilling
	AllocationsUnassignedQty	LineDetailsUnassignedQty
Appointments (FS300200)	Details.ServiceOrderDetailsRefNbr	Details.ServiceOrderDetailRefNbr
	Staff.DetailsRefNbr	Staff.DetailRefNbr
	Log.DetailsRefNbr	Log.DetailRefNbr
	PerformActionAction.PerformActionForMe	PerformActionAction.ShowOnlyMine
	PerformActionAction.DetailsRefNbr	PerformActionAction.DetailRefNbr
	PerformActionSelected___.DetailsRefNbr	PerformActionSelected___.DetailRefNbr
	OpenBatch	OpenPostBatch
	OpenINPostingDocument	OpenPostingDocument
	OtherInformationBillingInfo	BillingDocuments
	ProcessAppointmentAppointmentActions.CloseAppointment	ProcessAppointmentAppointmentActions.Close
	ProcessAppointmentAppointmentActions.SendEmailWithSigned Appointment	ProcessAppointmentAppointmentActions.EmailSignedAppointment
	ProcessAppointmentAppointmentActions.RunAppointmentBilling	ProcessAppointmentAppointmentActions.RunBilling
Appointments Closing (FS300210)	Details.ServiceOrderDetailsRefNbr	Details.ServiceOrderDetailRefNbr
	OpenBatch	OpenPostBatch
	OpenINPostingDocument	OpenPostingDocument

Form	Old Name	New Name
Start Travel or Service (FS300220)	Filter_.PerformActionForMe Filter_.DetailsRefNbr	Filter_.ShowOnlyMine Filter_.DetailRefNbr
Start Staff or Service (FS300230)	Filter_.PerformActionForMe	Filter_.ShowOnlyMine
Start Service and Assigned Staff (FS300240)	Selection.DetailsRefNbr	Selection.DetailRefNbr
Complete Service (FS300250)	Filter_.PerformActionForMe	Filter_.ShowOnlyMine
Complete Travel (FS300260)	Filter_.PerformActionForMe	Filter_.ShowOnlyMine
Pause Travel or Service (FS300270)	Filter_.PerformActionForMe	Filter_.ShowOnlyMine
Resume Travel or Service (FS300280)	Filter_.PerformActionForMe	Filter_.ShowOnlyMine
Inventory Update Batches (FS305900)	BatchDetailsInfo.ServiceOrderDetailsRefNbr	BatchDetailsInfo.ServiceOrderDetailRefNbr
Expense Receipts (EP301020)	ReceiptDetailsFieldServiceDetails.DocType ReceiptDetailsFieldServiceDetails.ReferenceNbr ReceiptDetailsFieldServiceDetails.ReferenceNbrFSEntity NotelDDescription ReceiptDetailsFieldServiceDetails.BillableInFieldServiceDocument PutOnHold	ReceiptDetailsFieldServiceDetails.RelatedSvcDocType ReceiptDetailsFieldServiceDetails.RelatedSvcDocNbr ReceiptDetailsFieldServiceDetails.RelatedSvcDocNbrFSEntity NotelDDescription ReceiptDetailsFieldServiceDetails.BillableInSvcDoc Hold

Removed Fields, Actions, and Containers

Form	Name	Comment
Service Orders (FS300100)	OpenInvoiceDocument action	
	ServiceOrder.Hold field	
	OtherInformationDescription container	
	OtherInformation.AllowBilling	Moved to BillingDocumentsAllowBilling.AllowBilling
	OtherInformation.Billed	Moved to BillingDocumentsAllowBilling.Billed
Appointments (FS300200)	OpenInvoiceDocument	
	AppointmentRecords.Hold	
Appointments Closing (FS300210)	StartTravelMenuActions	
	CompleteTravelMenuActions	
	StartAppointmentMenuActions	
	PauseAppointmentMenuActions	
	ResumeAppointmentMenuActions	
	CompleteAppointmentMenuActions	
	CancelAppointmentMenuActions	
	ReopenAppointmentMenuActions	
	CloseAppointmentMenuActions	
	UncloseAppointmentMenuActions	
	CloneAppointmentMenuActions	
	InvoiceAppointmentMenuActions	
	CreatePurchaseOrderMenuActions	
	OpenEmployeeBoardMenuActions	
	OpenUserCalendarMenuActions	
	EmailSignedAppointmentMenuActions	
	EmailConfirmationToCustomerMenuActions	
	EmailConfirmationToStaffMemberMenuActions	
	EmailConfirmationToGeoZoneStaffMenuActions	
	RecalcExternalTaxMenuActions	

Form	Name	Comment
	PrintAppointmentReportReport	
	PrintServiceTimeActivityReportReport	
	OpenInvoiceDocument	

Inventory and Order Management

This section lists the fields, actions, and containers that have been renamed on the inventory and order management screens or removed from these screens.

Renamed Fields, Actions, and Containers

Screen	Old Name	New Name
Requisitions (RQ302000)	Complete Bidding Send All Requests	View Bidding Send Requests for Proposal
Request (RQ301000)	ShippingInstructionsShipTo BudgetDetails BudgetDetails.FinPeriod BudgetDetails.BudgetValidation OtherInformation DocumentDetails ShippingInstructionsShipToShipToAddress ShippingInstructionsShipToShipToContact ApprovalDetails BudgetDetailsDetails	ShippingShipTo Budget Budget.FinPeriod Budget.BudgetValidation Other Details ShippingShipToShipToAddress ShippingShipToShipToContact Approvals BudgetDetails
Requisitions (RQ302000)	ShippingInstructionsShipTo ShippingInstructionsShipVia OtherInformation DocumentDetails	ShippingShipTo ShippingShipVia Other Details

Screen	Old Name	New Name
	ShippingInstructionsShipToShipToAddress ShippingInstructionsShipToShipToContact ApprovalDetails	ShippingShipToShipToAddress ShippingShipToShipToContact Approvals
Purchase Orders (PO301000)	ShippingInstructionsShipTo ShippingInstructionsShipVia OtherInformation DocumentDetails TaxDetails DiscountDetails ShippingInstructionsShipToShipToAddress ShippingInstructionsShipToShipToContact ApprovalDetails	ShippingShipTo ShippingShipVia Other Details Taxes Discounts ShippingShipToShipToAddress ShippingShipToShipToContact Approvals
Purchase Receipts (PO302000)	OtherInformation DocumentDetails PurchaseOrders PutAwayHistory Allocations BillingHistory PRHistory AllocationsUnassignedQty	Other Details Orders PutAway LineDetails Billing History LineDetailsUnassignedQty
Receive and Put Away (PO302020)	TransferAllocations	TransferLineDetails
Landed Costs (PO303000)	FinancialDetailsBillingSettings FinancialDetailsAssignTo DocumentDetails TaxDetails	FinancialBillingSettings FinancialAssignTo Details LandedCosts
Sales Orders (SO301000)	FinancialSettingsPaymentInformation FinancialSettingsFinancialInformation	FinancialPaymentInformation FinancialFinancialInformation

Screen	Old Name	New Name
	DocumentDetails TaxDetails FinancialSettingsBillToAddress ShippingSettingsShipToAddress FinancialSettingsBillToContact ShippingSettingsShipToContact ApprovalDetails DiscountDetails Allocations AllocationsUnassignedQty	Details Taxes AddressesBillToAddress AddressesShipToAddress AddressesBillToContact AddressesShipToContact Approvals Discounts LineDetails LineDetailsUnassignedQty
Shipments (SO302000)	ShippingSettingsShippingInformationRateSelection ShippingSettingsShippingInformationRateSelectionCurrencyUnitEquivalents ShippingSettingsShippingInformation ShippingSettingsServiceManagement DocumentDetails ShippingSettingsShipToAddress ShippingSettingsShipToContact Allocations AllocationsUnassignedQty	ShippingShippingInformationRateSelection ShippingShippingInformationRateSelectionCurrencyUnitEquivalents ShippingShippingInformation ShippingServiceManagement Details ShippingShipToAddress ShippingShipToContact LineDetails LineDetailsUnassignedQty
Pick, Pack, and Ship (SO302020)	HeaderView.ProcessingStatusIcon	ProcessingSucceeded
Picking Worksheets (SO302500)	DocumentDetails Allocations	Details LineDetails
Item Warehouse Details (IN204500)	GeneralSettingsStorageDefaults GeneralSettingsPhysicalInventory GeneralSettingsItemDefaults GeneralSettingsGLAccounts ReplenishmentInfoReplenishmentSettings	GeneralStorageDefaults GeneralPhysicalInventory GeneralItemDefaults GeneralGLAccounts ReplenishmentReplenishmentSettings

Screen	Old Name	New Name
	ReplenishmentInfoReplenishmentParameters	ReplenishmentReplenishmentParameters
	ReplenishmentInfoDemandForecastResult	ReplenishmentDemandForecastResult
	ReplenishmentInfoPreferredParametersOverridePreferredVendor	ReplenishmentPreferredParametersOverridePreferredVendor
	PriceCostInformationStandardCost	PriceCostStandardCost
	PriceCostInformationPriceManagement	PriceCostPriceManagement
	PriceCostInformationCostStatistics	PriceCostCostStatistics
	ReplenishmentInfoPreferredParameters	ReplenishmentInfoPreferredParameters

Removed Fields, Actions, and Containers

Screen	Name	Comment
Item Warehouse Details (IN204500)	ManufacturingReplenishments.Source ManufacturingReplenishments. OverrideAMReplenishmentPolicyOverride ManufacturingReplenishments.ReplenishmentWarehouse	When Manufacturing was enabled and Inventory Replenishment features was disabled, unbound fields were used to expose these fields. Now that Manufacturing is a part of MYOB Advanced, there is no need for these duplicate unbound fields. The correct changes were made to the features to allow the display of the replenishment fields when this feature is disabled and when Manufacturing is enabled.
Stock Items (IN202500)	WarehouseDetails.ReplenishmentSourceReplenishmentSource WarehouseDetails.ReplenishmentSourceAMReplenishmentSource	
Order Types (SO201000)	GeneralSettingsOrderSettings.CommitmentTracking	The field was internal.
Requests (RQ301000)	Hold checkbox	The new actions PutOnHold and ReleaseFromHold should be used instead.
Requisitions (RQ302000)	Hold checkbox SendRequestForProposalAction	The new actions PutOnHold and ReleaseFromHold should be used instead. The action duplicated the Send All Requests action.
Checkout (SP700002)	InventorySummary action	
Receive and Put Away (PO302020)	HeaderView.ManualView HeaderView.Mode	

Screen	Name	Comment
Sales Orders (SO301000)	InventorySummary action ShippingSettingsShippingInformation container	The ItemAvailability action has been added instead. The ShippingSettingsShippingInformation container has been split into two containers: ShippingDeliverySettings and ShippingOrderShippingSettings.
Pick, Pack, and Ship (SO302020)	HeaderView.ManualView HeaderView.Mode	
Purchase Orders (PO301000)	SalesOrderType SalesOrderNbr	moved from OtherInformation to ShippingInstructions
Write Off Balance and Credits (AR505000)	Selection.Branch	Replaced by Selection.CompanyBranch
Companies (CS101500)	CompanyDetailsTaxRegistrationInfoConfigurationSettings. OrganizationGroup	The Company Groups has been added
Non-Stock Items (IN202000)	MSRP DefaultPrice PendingCost PendingCostDate CurrentCost EffectiveDate LastCost	Moved to the PriceCostInformationPriceManagementPriceManagement section Moved to the PriceCostInformationStandardCost section Moved to the PriceCostInformationStandardCostStandardCost section

Other Changes

The AffectedPOOrdersBySelf class has been renamed to AffectedBlanketOrdersByOriginalOrders.

The POOrderEntry.POOrder_DontPrint_FieldUpdated and POOrderEntry.POOrder_DontEmail_FieldUpdated event handlers have been removed. Their implementation has been moved to the corresponding RowUpdated event handlers.

The following new FK classes have been added: POLineUOpen+FK+BlanketOrder and POLineUOpen+FK+BlanketOrderLine.

Customization projects that reference the PX.Objects.IN namespace in PX.Objects.dll should be recompiled. Overridden event handlers for graphs in PX.Objects.IN namespace should be replaced with generic ones.

In the scope of the Cross-Company Sales feature, the following property has been added to the PX.Objects.IN.ILSMaster interface: bool? IsIntercompany { get; }. If the user's customization has a custom implementation of the PX.Objects.IN.ILSMaster or PX.Objects.IN.ILSPPrimary interfaces, it should be extended with implementation of the new property. A trivial implementation might be done in the following way:

```
bool? ILSMaster.IsIntercompany => false;
```

Commerce

This section lists the fields, actions, and containers that have been renamed on the Commerce screens or removed from these screens.

Renamed Fields, Actions, and Containers

Screen	Old Name	New Name
Process Data (BC501500)	SET SYNCED	SET AS PROCESSED
	Set Selected Synced	Set Selected as Processed
	Set All Synced	Set All as Processed
Sync History (BC301000)	Set Synced	Set as Processed
	Synchronized status value	Processed status value

Removed Fields, Actions, and Containers

Form	Name	Comment
BigCommerce Stores (BC201000)	OrderSettingsTaxes.PrimaryTaxZone	User interface has been rearranged.
Shopify Stores (BC201010)	OrderSettingsTaxes.PrimaryTaxZone	

Manufacturing

This section lists the fields, actions, and containers that have been renamed on the Manufacturing screens or removed from these screens.

Form	Name	Comment
Engineering Change Order (AM215000)	SubmitActionDropMenu	Implementation of the new workflow required the change of the listed actions and fields.
	ApproveActionDropMenu	
	RejectActionDropMenu	
	CommitChangesActionDropMenu	
	ECO.Hold	
Supplier Shipments (AM310000)	ConfirmShipmentAction	
	PackingListReport	
	PickListReport	
	ShipmentSummary.Hold	
Engineering Change Request (AM210000)	SubmitActionDropMenu	
	ApproveActionDropMenu	
	RejectActionDropMenu	
	CreateECOActionDropMenu	
	ECR.Hold	

Other Changes

The Process Capable to Promise screen (AM515000) has been updated to fit better processing selections or actions.

Construction

This section lists the fields, actions, and containers that have been renamed on the Construction screens or removed from these screens.

Renamed Fields, Actions, and Containers

Form	Old Name	New Name
Pro Forma Invoices (PM307000)	FinancialDetailsInvoiceSettings.CustomerUsageType	EntityUsageType

Removed Screens, Actions and Containers

Form	Name	Comment
Project Preferences (PM101000)	GeneralSettingsGeneralSettings.InternalRevenueCommitmentTracking	The field was internal.
Projects (PM301000)	ViewRevenueCommitments SettingsDefaultValues.DefaultAccount SettingsDefaultValues.DefaultSubaccount Tasks.DefaultAccount Tasks.DefaultSubaccount Hold checkbox	New workflow actions should be used instead.
Project Templates (PM208000)	SettingsDefaultValues.DefaultAccount SettingsDefaultValues.DefaultSubaccount	
Project Template Tasks (PM208010)	SummaryDefaultValues.DefaultAccount SummaryDefaultValues.DefaultSubaccount	
Common Tasks (PM208030)	SummaryDefaultValues.DefaultAccount SummaryDefaultValues.DefaultSubaccount	
Project Tasks (PM302000)	SummaryDefaultValues.DefaultAccount SummaryDefaultValues.DefaultSubaccount	

Form	Name	Comment
Tasks by Employee (PM402000)	FilteredItems.DefaultSubaccount	
Cost Projection (PM305000)	Hold checkbox	New workflow actions should be used instead.
Pro Forma Invoices (PM307000)	Hold checkbox	New workflow actions should be used instead.
Change Orders (PM308000)	Hold checkbox	New workflow actions should be used instead.
Change Requests (PM308500)	Hold checkbox	New workflow actions should be used instead.

Database Changes

The following sections describe the changes in the MYOB Advanced database schema.

Removed Tables

The following tables have been removed from the database:

- DailyFieldReportApprovalHistory
- FSCustomAppointmentStatus
- FSCustomFieldAppointment
- FSxARTran

Removed Columns

This section lists the columns removed from the database tables.

Table	Column
AMMachSchd	SchdEfficiencyTime
AMMachSchdDetail	SchdTime
AMMachSchdDetail	SchdEfficiencyTime
AMProdOper	WaitTime
AMPSetup	MoveTime
AMSchdOper	TotPlanHrs
AMSchdOperDetail	SchdTime
AMSchdOperDetail	SchdEfficiencyTime
AMToolSchdDetail	SchdTime

Table	Column
AMToolSchdDetail	SchdEfficiencyTime
AMWCSchd	SchdEfficiencyTime
AMWCSchdDetail	SchdEfficiencyTime
ARTran	CommitmentID
BCBindingExt	SyncTaxes
BCBindingExt	PrimaryTaxZoneID
Contract	DefaultAccountID
Contract	DefaultSubID
CRSetup	ContactEmailUnique
FSAppointment	GeneratedBySystem
FSEquipment	DispAppointmentID
FSEquipment	DispServiceOrderID
FSEquipment	InstAppointmentID
FSEquipment	InstServiceOrderID
FSEquipmentComponent	InstAppointmentID
FSEquipmentComponent	InstServiceOrderID
FSxAPTran	AppDetID
FSxAPTran	AppointmentDate
FSxAPTran	AppointmentID

Table	Column
FSxAPTran	BillCustomerID
FSxAPTran	CustomerLocationID
FSxAPTran	ServiceOrderDate
FSxAPTran	SODetID
FSxAPTran	SOID
FSxAPTran	Source
FSxINTran	AppDetID
FSxINTran	AppointmentDate
FSxINTran	AppointmentID
FSxINTran	BillCustomerID
FSxINTran	CustomerLocationID
FSxINTran	SODetID
FSxINTran	SOID
FSxINTran	Source
FSxSOLine	AppDetID
FSxSOLine	AppointmentDate
FSxSOLine	AppointmentID
FSxSOLine	BillCustomerID
FSxSOLine	ContractPeriodID

Table	Column
FSxSOLine	CustomerLocationID
FSxSOLine	EquipmentLineRef
FSxSOLine	NewTargetEquipmentLineNbr
FSxSOLine	ServiceContractID
FSxSOLine	ServiceOrderDate
FSxSOLine	SODetID
FSxSOLine	SOID
FSxSOLine	Source
GINavigationScreen	ScreenID
GLSetup	RoundingLimit
INMatrixGenerationRule	TemplateID
Locale	IsLocalization
PMSetup	RevenueCommitmentTracking
PMTask	DefaultAccountID
PMTask	DefaultSubID
PMWorkCode	CostCodeFrom
PMWorkCode	CostCodeTo
PRPayment	ChkReprintType
PRPayment	Printed

Table	Column
PRSetup	LeaveType
SOLine	CommitmentID
SOOrderType	RequireLocation
SOOrderType	CommitmentTracking

Modified Columns

This section lists the columns whose data type, size, precision, or scale (the number of symbols after comma) has been changed in the new version of the database.

Table	Column	Old Type	New Type	Old Precision	New Precision	Old Scale	New Scale	Old Size	New Size
AMBomItem	Status	Int	Char	0	0	0	1		
AMECOItem	Status	Int	Char	0	0	0	1		
AMECRIItem	Status	Int	Char	0	0	0	1		
APRegister	DocDesc	NVarChar	NVarChar	0	0	256	512		
ARRegister	DocDesc	NVarChar	NVarChar	0	0	256	512		
Batch	Description	NVarChar	NVarChar	0	0	255	512		
CAAdj	TranDesc	NVarChar	NVarChar	0	0	256	512		
CABankTran	UserDesc	NVarChar	NVarChar	0	0	256	512		
CABankTranDetail	TranDesc	NVarChar	NVarChar	0	0	256	512		
CABankTranRule	BankTranDescription	NVarChar	NVarChar	0	0	256	512		

Table	Column	Old Type	New Type	Old Precision	New Precision	Old Scale	New Scale	Old Size	New Size
CASplit	TranDesc	NVarChar	NVarChar	0	0	256	512		
CATran	TranDesc	NVarChar	NVarChar	0	0	256	512		
CRCaseClassLaborMatrix	EarningType	NChar	NVarChar	0	0	2	15		
EPContractRate	EarningType	NChar	NVarChar	0	0	2	15		
EPEarningType	TypeCD	NChar	NVarChar	0	0	2	15		
EPEmployeeClassLaborMatrix	EarningType	NChar	NVarChar	0	0	2	15		
EPSetup	RegularHoursType	NChar	NVarChar	0	0	2	15		
EPSetup	HolidaysType	NChar	NVarChar	0	0	2	15		
EPSetup	VacationsType	NChar	NVarChar	0	0	2	15		
EPTimeCardSummary	EarningType	NChar	NVarChar	0	0	2	15		
FSAppointmentDet	LinkedDocRefNbr	NChar	NVarChar	0	0	15	15		
FSAppointmentDet	LinkedDocType	NChar	VarChar	0	0	4	4		
FSAppointmentEmployee	EarningType	NChar	NVarChar	0	0	2	15		
FSLog	EarningType	NChar	NVarChar	0	0	2	15		
FSSetup	MapApiKey	NVarChar	NVarChar	0	0	255	1024		
FSSetup	ROWWLicensekey	NVarChar	NVarChar	0	0	50	1024		
FSSODet	LinkedDocRefNbr	NChar	NVarChar	0	0	15	15		
FSSODet	LinkedDocType	NChar	VarChar	0	0	4	4		

Table	Column	Old Type	New Type	Old Precision	New Precision	Old Scale	New Scale	Old Size	New Size
FSSrvOrdType	DfltEarningType	NChar	NVarChar	0	0	2	15		
FSxService	DfltEarningType	NChar	NVarChar	0	0	2	15		
GLTran	TranDesc	NVarChar	NVarChar	0	0	256	512		
GLTran	EarningTypeCD	NChar	NVarChar	0	0	2	15		
GLTrialBalanceImportMap	Status	Int	Char	0	0	0	1		
PMTimeActivity	EarningTypeID	NChar	NVarChar	0	0	2	15		
PMTran	EarningType	NChar	NVarChar	0	0	2	15		
PRBatch	DocDesc	NVarChar	NVarChar	0	0	60	128		
PRBenefitDetail	EarningTypeCD	NVarChar	NVarChar	0	0	2	15		
PRDeductCodeEarningIncreasingWage	ApplicableTypeCD	NVarChar	NVarChar	0	0	2	15		
PREarningDetail	TypeCD	NVarChar	NVarChar	0	0	2	15		
PREarningType	TypeCD	NVarChar	NVarChar	0	0	2	15		
PREarningType	RegularTypeCD	NChar	NVarChar	0	0	2	15		
PREarningTypeDetail	TypeCD	NVarChar	NVarChar	0	0	2	15		
PREmployeeEarning	TypeCD	NVarChar	NVarChar	0	0	2	15		
PROvertimeRule	DisbursingTypeCD	NChar	NVarChar	0	0	2	15		
PRPaymentEarning	TypeCD	NVarChar	NVarChar	0	0	2	15		
PRPaymentFringeEarningDecreasingRate	EarningTypeCD	NChar	NVarChar	0	0	2	15		

Table	Column	Old Type	New Type	Old Precision	New Precision	Old Scale	New Scale	Old Size	New Size
PRPTOBank	EarningTypeCD	NChar	NVarChar	0	0	2	15		
PRSetup	RegularHoursType	NChar	NVarChar	0	0	2	15		
PRSetup	HolidaysType	NChar	NVarChar	0	0	2	15		
PRSetup	CommissionType	NChar	NVarChar	0	0	2	15		
PRTaxCode	TaxCD	NVarChar	NVarChar	0	0	15	60		
PRTaxDetail	EarningTypeCD	NVarChar	NVarChar	0	0	2	15		
PRYtdEarnings	TypeCD	NVarChar	NVarChar	0	0	2	15		

Modified Indexes

This section lists the changes made to the database indexes. These changes are not breaking but the information about them can be useful to some readers. The list includes only the changes made to the tables that exist in both the previous and the current versions of the database scheme.

Table	Index	Column	Modification
ARDunningSetup	ARDunningSetup_PK	BaseCuryID	New column added
FSPostRegister	FSPostRegister_PK	EntityType	New column added
FSPostRegister	FSPostRegister_PK	PostedTO	New column added
FSPostRegister	FSPostRegister_PK	Type	Column removed
INMatrixGenerationRule	INMatrixGenerationRule_PK	ParentType	New column added
INMatrixGenerationRule	INMatrixGenerationRule_PK	ParentID	New column added

INMatrixGenerationRule	INMatrixGenerationRule_PK	TemplateID	Column removed
------------------------	---------------------------	------------	----------------

Code Changes

The following sections describe changes in the PX.Common.dll, PX.Data.dll, PX.Objects.dll, and PX.Objects.FS.dll libraries.

Removed Data Access Classes

This section lists the removed data access classes (DACs)—that is, the classes that implement PX.Data.IBqlTable.

Namespace	DAC
PX.Data.EP	DynamicAttachment
PX.Objects.RQ	RQRequisitionOwned
PX.Objects.IN	INTransferEntry+INTransferStatusFilter
PX.Objects.IN	INTransferEntry+INSiteStatusSelected
PX.Objects.IN.WMS	ScanDAC
PX.Objects.IN.WMS	ScanHeader
PX.Objects.IN.WMS	ScanLine
PX.Objects.IN.WMS	ScanSplit
PX.Objects.AP.DAC	APReportParameters
PX.Objects.FS	ServiceOrderCore+RelatedServiceOrder
PX.Objects.FS	FSCustomAppointmentStatus
PX.Objects.FS	FSCustomFieldAppointment
PX.Objects.PJ.DailyFieldReports.PJ.DAC	DailyFieldReportApprovalHistory

Removed Graphs

This section lists the removed graphs—that is, the classes that inherit from PX.Data.PXGraph.

Namespace	Graph
PX.Objects.CT	CTBillEngine+ARContractInvoiceEntry
PX.Objects.FS	AppointmentEntryBase<TGraph>
PX.Objects.FS	FSDeallocateProcess
PX.Objects.FS	CustomAppointmentStatusMaint
PX.Objects.FS	CustomFieldAppointmentsMaint

Modified Interfaces And Abstract Classes

This section lists the modified interfaces and abstract classes.

Namespace	Interface or Abstract Class	Number of Added Methods	Number of Removed Methods
PX.Data	ICurrentUserInformationProvider	13	0
PX.Data	PXCache	3	1
PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+ActionDefinition+IAllowOptionalConfigAction	4	0
PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+ActionState+IAllowOptionalConfig	2	0
PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+Assignment+IContainerFillerFields	8	0
PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+Assignment+IContainerFillerParameters	4	0
PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+ScreenConfiguration+IAllowOptionalConfig	1	0

Namespace	Interface or Abstract Class	Number of Added Methods	Number of Removed Methods
PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+Transition+IAllowOptionalConfig	2	2
PX.Objects.PO	IAPTranSource	6	0
PX.Objects.IN	ILSMaster	1	0
PX.Objects.IN	INRegisterEntryBase	1	0
PX.Objects.CM.Extensions	IPXCurrencyService	1	0
PX.Objects.AR.CCPaymentProcessing. Wrappers	IBaseProfileProcessingWrapper	1	0
PX.Objects.AR.CCPaymentProcessing. Wrappers	ICardTransactionProcessingWrapper	2	0
PX.Objects.AR.CCPaymentProcessing. Repositories	ICCPaymentProcessingRepository	1	0
PX.Objects.AR.CCPaymentProcessing. Interfaces	IExternalTransaction	6	0
PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>	1	1
PX.Objects.FS	IDocLine	1	0
PX.Objects.FS	IFSSODetBase	4	0
PX.Objects.FS	IIInvoiceProcessGraph	1	1
PX.Objects.AM	ISchd	0	2
PX.Objects.AM	ISchdDetail	4	4
PX.Payroll	IPayrollTaxService	2	0

Namespace	Interface or Abstract Class	Number of Added Methods	Number of Removed Methods
PX.Objects.PR	IPayrollClientTaxService	2	2

Other Removed Classes

This section lists the removed classes that have not been included in the sections above—that is, the classes that do not implement PX.Data.IBqlTable or derive from PX.Data.Constant or PX.Data.PXGraph. This list also does not include any classes that implement PX.Data.IBqlField.

Namespace	Class
PX.Mail	MailException
PX.Mail	MailListItem
PX.Data	IRelativeDatesManager
PX.Data.RelativeDates	IFinancialPeriodManager
PX.Web.UI	Sprite+Main
PX.Web.UI	Sprite+Control
PX.Web.UI	Sprite+Tree
PX.Web.UI	Sprite+Text
PX.Web.UI	Sprite+Ac
PX.Common	ArrayDeconstruct
PX.Common	AsyncOP
PX.Common	AsyncOP_State

Namespace	Class
PX.Common	BindInfoProtocol
PX.Common	OrderedHashSet<T>+ReadOnlyOrderedHashSet
PX.Common	Composite<T1>
PX.Common	Composite<T1,T2>
PX.Common	Composite<T1,T2,T3>
PX.Common	Composite<T1,T2,T3,T4>
PX.Common	Composite<T1,T2,T3,T4,T5>
PX.Common	Composite<T1,T2,T3,T4,T5,T6>
PX.Common	Composite<T1,T2,T3,T4,T5,T6,T7>
PX.Common	Composite<T1,T2,T3,T4,T5,T6,T7,T8>
PX.Common	ExceptionEventArgs
PX.Common	GenericCall
PX.Common	GenericCall+OfFunction<TResult>
PX.Common	GenericCall+OfAction
PX.Common	GetComparer
PX.Common	PXCultureInfo
PX.Common	HostEntry
PX.Common	IHtmlSanitizer
PX.Common	EmptyHtmlSanitizerService

Namespace	Class
PX.Common	IAsyncOP
PX.Common	IPBindInfo
PX.Common	KeyValuePair<K,V>
PX.Common	PXLocalizeConstantCaller
PX.Common	ConsoleLogger
PX.Common	CommonMessages
PX.Common	PXReflectionSerializer+ObjectComparer<T>
PX.Common	BitWriter
PX.Common	BitReader
PX.Common	BinaryWriterEx
PX.Common	ReadDelException
PX.Common	PXSerializationException
PX.Common	PXSerializationSurrogateAttribute
PX.Common	PXSerializationSurrogate
PX.Common	SparseMemoryStream
PX.Common	PXReaderWriterScope
PX.Common	Range_long
PX.Common	ResettableEnumerableObject
PX.Common	ResettableEnumerator

Namespace	Class
PX.Common	ResettableEnumerableObject<T>
PX.Common	ResettableEnumerator<T>
PX.Common	ServiceRegistration
PX.Common	SslMode
PX.Common	StreamLineReader
PX.Common	StringReader
PX.Common	ThreadCop
PX.Common	TimerEx
PX.Common	ToArray+IsNotEmpty
PX.Common	ToArrayOf<TBase>+Concat<TArr1,TArr2>
PX.Common	ToArrayOf<TBase>+Append<TArr,TElement>
PX.Common	ToArrayOf<TBase>+FilledWith<T1>
PX.Common	ToArrayOf<TBase>+IFilledWith<T1>
PX.Common	ToArrayOf<TBase>+Prepend<TElement,TArr>
PX.Common	ToArrayOf<TBase>+Empty
PX.Common	ToArrayOf<TBase>+IFilledWith<T1,T2>
PX.Common	ToArrayOf<TBase>+FilledWith<T1,T2>
PX.Common	ToArrayOf<TBase>+IFilledWith<T1,T2,T3>
PX.Common	ToArrayOf<TBase>+FilledWith<T1,T2,T3>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54, T55>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54, T55,T56>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T

Namespace	Class
	55,T56>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54, T55,T56,T57>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T5,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54, T55,T56,T57,T58,T59>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52, T53,T54,T55,T56,T57,T58,T59,T60>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71>

Namespace	Class
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74>
PX.Common	ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80>

Namespace	Class
PX.Common	<code>ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80></code>
PX.Common	<code>ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81></code>
PX.Common	<code>ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81></code>
PX.Common	<code>ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82></code>
PX.Common	<code>ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82></code>
PX.Common	<code>ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83></code>
PX.Common	<code>ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83></code>
PX.Common	<code>ArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84></code>
PX.Common	<code>ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84></code>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87>
Namespace	Class
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T

Namespace	Class
	25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52, T53,T54,
Namespace	Class
	T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84 ,T85,T86,T87,T88,T89,T90,T91,T92>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80 ,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92>
PX.Common	ArrayOf<TBase>+IfilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84 ,T85,T86,T87,T88,T89,T90,T91,T92,T93>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93>
PX.Common	ArrayOf<TBase>+IfilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84 ,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94>
PX.Common	ArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94>
PX.Common	ArrayOf<TBase>+IfilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84 ,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96>
Namespace	Class
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97,T98>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97,T98>

Namespace	Class
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97,T98,T99>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97,T98,T99>
PX.Common	TypeArrayOf<TBase>+IFilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97,T98,T99,T100>
PX.Common	TypeArrayOf<TBase>+FilledWith<T1,T2,T3,T4,T5,T6,T7,T8,T9,T10,T11,T12,T13,T14,T15,T16,T17,T18,T19,T20,T21,T22,T23,T24,T25,T26,T27,T28,T29,T30,T31,T32,T33,T34,T35,T36,T37,T38,T39,T40,T41,T42,T43,T44,T45,T46,T47,T48,T49,T50,T51,T52,T53,T54,T55,T56,T57,T58,T59,T60,T61,T62,T63,T64,T65,T66,T67,T68,T69,T70,T71,T72,T73,T74,T75,T76,T77,T78,T79,T80,T81,T82,T83,T84,T85,T86,T87,T88,T89,T90,T91,T92,T93,T94,T95,T96,T97,T98,T99,T100>
PX.Common	DateHelper
PX.Common	DateMessages
PX.Common	PXXmlNode
PX.Common	PXXmlNodeWithName
PX.Common	PXXmlText
PX.Common	PXXmlComment
PX.Common	PXXmlElement
PX.Common	PXXmlEndElement
PX.Common	PXXmlNone

Namespace	Class
PX.Common	PXXmlAttribute
PX.Common	FlexibleXmlReader
PX.Common	FlexibleXmlDocument
PX.Common	ZipArchive+ItemInfo
PX.Common.IO	Base64
PX.Common.IO	Base64Stream
PX.Common.IO	DataSizeExceededException
PX.Common.IO	FifoBuffer
PX.Common.IO	IncompleteDataException
PX.Common.IO	JunkingStream
PX.Common.IO	LineReader
PX.Common.IO	LineSizeExceededException
PX.Common.IO	MultiStream
PX.Common.IO	PartialStream
PX.Common.IO	QuotedPrintableStream
PX.Common.IO	ReadLineEventArgs
PX.Common.IO	ReadWriteControlledStream
PX.Common.IO	SizeExceededAction
PX.Common.IO	SmartStream

Namespace	Class
PX.Common.IO	SmartStream+ReadLineAsyncOP
PX.Common.IO	SmartStream+ReadPeriodTerminatedAsyncOP
PX.Common.IO	SmartStream+WritePeriodTerminatedAsyncOP
PX.Common.IO	TempFileStream
PX.Common.UDP	UdpDataReceiver
PX.Common.UDP	PacketReceivedEventArgs
PX.Common.TCP	TcpClient
PX.Common.TCP	TcpClient+ConnectAsyncOP
PX.Common.TCP	TcpClient+SwitchToSecureAsyncOP
PX.Common.TCP	TcpClient+CompleteConnectCallback
PX.Common.TCP	TcpSession
PX.Common.Service	SimpleVersionService
PX.Common.Services	LicenseServiceStub
PX.Common.Serialization	MemberInfo
PX.Common.Serialization	MemberDescriptor
PX.Common.Serialization	IMemberHandler
PX.Common.Serialization	IMemberSerializer
PX.Common.Serialization	IFormatWriter
PX.Common.Serialization	PropertyHandler

Namespace	Class
PX.Common.Serialization	FieldHandler
PX.Common.Serialization	CollectionHandlers<T>
PX.Common.Serialization	ListHandler
PX.Common.Serialization	ArrayHandler
PX.Common.Serialization	SimpleTypeSerializer
PX.Common.Serialization	NullableTypeSerializer
PX.Common.Serialization	CollectionSerializer<T>
PX.Common.Serialization	ArraySerializer
PX.Common.Serialization	ListSerializer
PX.Common.Serialization	TypeProxySerializer
PX.Common.Serialization	TypeSerializer
PX.Common.Serialization	TypeSerializer+Schema
PX.Common.Serialization	XmlFormatter
PX.Common.Parser	ExpressionNode+ConvertMethod
PX.Common.Parser	TypePrecedence
PX.Common.Parser	Operand
PX.Common.Parser	Operator+CallbackFunc
PX.Common.Parser	OperatorContext
PX.Common.MsCrm	MsCrmClient

Namespace	Class
PX.Common.MIME	Body
PX.Common.MIME	BodyApplication
PX.Common.MIME	BodySinglepartBase
PX.Common.MIME	BodyApplicationPkcs7Mime
PX.Common.MIME	BodyAudio
PX.Common.MIME	BodyImage
PX.Common.MIME	BodyMessage
PX.Common.MIME	BodyMessageDeliveryStatus
PX.Common.MIME	BodyMessageRfc822
PX.Common.MIME	BodyMultipart
PX.Common.MIME	BodyMultipart+_MultipartReader
PX.Common.MIME	BodyMultipartAlternative
PX.Common.MIME	BodyMultipartDigest
PX.Common.MIME	BodyMultipartEncrypted
PX.Common.MIME	BodyMultipartFormData
PX.Common.MIME	BodyMultipartMixed
PX.Common.MIME	BodyMultipartParallel
PX.Common.MIME	BodyMultipartRelated
PX.Common.MIME	BodyMultipartReport

Namespace	Class
PX.Common.MIME	BodyMultipartSigned
PX.Common.MIME	BodyProvider
PX.Common.MIME	BodyText
PX.Common.MIME	BodyUnknown
PX.Common.MIME	BodyVideo
PX.Common.MIME	DispositionTypes
PX.Common.MIME	EncodedWordEncoding
PX.Common.MIME	EncodingEncodedWord
PX.Common.MIME	Entity
PX.Common.MIME	EntityCollection
PX.Common.MIME	Header
PX.Common.MIME	HeaderCollection
PX.Common.MIME	HeaderContentDisposition
PX.Common.MIME	HeaderContentType
PX.Common.MIME	HeaderParameter
PX.Common.MIME	HeaderParameterCollection
PX.Common.MIME	HeaderParameterCollection+_ParameterBuilder
PX.Common.MIME	HeaderProvider
PX.Common.MIME	Class

Namespace	Class
PX.Common.MIME	HeaderUnparsed
PX.Common.MIME	HeaderUnstructured
PX.Common.MIME	MediaTypes+Application
PX.Common.MIME	MediaTypes+Image
PX.Common.MIME	MediaTypes+Text
PX.Common.MIME	MediaTypes+Multipart
PX.Common.MIME	MediaTypes+Message
PX.Common.MIME	Message
PX.Common.MIME	MimeReader
PX.Common.MIME	TransferEncodings
PX.Common.MIME	Utils
PX.Common.Mail	Address
PX.Common.Mail	AddressList
PX.Common.Mail	Group
PX.Common.Mail	HeaderAddressList
PX.Common.Mail	HeaderDispositionNotificationOptions
PX.Common.Mail	HeaderMailbox
PX.Common.Mail	HeaderMailboxList
PX.Common.Mail	HeaderReceived

Namespace	Class
PX.Common.Mail	HeaderReturnPath
PX.Common.Mail	MailboxList
PX.Common.Mail	MailReceiver+Types
PX.Common.Mail	MailReceiver+ReadUIDs
PX.Common.Mail	MailReceiver+IReadUIDsCollection
PX.Common.Mail	MailReceiver+Context
PX.Common.Mail	MailReceiver+IMailReceiverBuilder
PX.Common.Mail	Message
PX.Common.Mail	TcpInfo
PX.Common.Mail	Utils
PX.Common.GS1	DataType
PX.Common.GS1	AI
PX.Common.GS1	StringData
PX.Common.GS1	DecimalData
PX.Common.GS1	CurrencyData
PX.Common.GS1	DateTimeData
PX.Common.GS1	ListData
PX.Common.GS1	Codes
PX.Common.GS1	Codes+Length

Namespace	Class
PX.Common.GS1	Codes+Length+Logistic
PX.Common.GS1	Codes+Width
PX.Common.GS1	Codes+Width+Logistic
PX.Common.GS1	Codes+Height
PX.Common.GS1	Codes+Height+Logistic
PX.Common.GS1	Codes+Weight
PX.Common.GS1	Codes+Weight+Net
PX.Common.GS1	Codes+Weight+Gross
PX.Common.GS1	Codes+Area
PX.Common.GS1	Codes+Area+Logistic
PX.Common.GS1	Codes+Volume
PX.Common.GS1	Codes+Volume+Net
PX.Common.GS1	Codes+Volume+Logistic
PX.Common.GS1	Codes+CountryOf
PX.Common.GS1	Codes+NHRN
PX.Common.GS1	Codes+CompanyInternal
PX.Common.Disposables	CompositeDisposable
PX.Common.Disposables	Disposable
PX.Common.Cryptography	TimeConstantComparer

Namespace	Class
PX.Common.Collection	LinkEntry
PX.Common.Collection	LinkEntry<TLeft,TRight>
PX.Common.Authentication	AuthenticateEventArgs
PX.Common.Authentication	AuthType
PX.Common.Authentication	HttpDigest
PX.Common.Authentication	SaslDigestMD5Challenge
PX.Common.Authentication	SaslDigestMD5Response
PX.Common.Authentication	SaslServerMechanism
PX.Common.Authentication	SaslServerMechanismCramMd5
PX.Common.Authentication	SaslServerMechanismDigestMd5
PX.Common.Authentication	SaslServerMechanismLogin
PX.Common.Authentication	SaslServerMechanismPlain
PX.Common.Authentication	UserInfoEventArgs
PX.Common.Soap.Client	SoapClient
PX.Common.SMTP	DsnNotify
PX.Common.SMTP	DsnRet
PX.Common.SMTP	SmptReplyLine
PX.Common.SMTP	SmptServiceExtensions
PX.Common.SMTP	SmtpMailbox

Namespace	Class
PX.Common.SMTP	Utils
PX.Common.SMTP.Client	SmtpClient
PX.Common.SMTP.Client	SmtpClient+EhloHeloAsyncOP
PX.Common.SMTP.Client	SmtpClient+StartTlsAsyncOP
PX.Common.SMTP.Client	SmtpClient+MailFromAsyncOP
PX.Common.SMTP.Client	SmtpClient+RcptToAsyncOP
PX.Common.SMTP.Client	SmtpClient+SendMessageAsyncOP
PX.Common.SMTP.Client	SmtpClient+RsetAsyncOP
PX.Common.SMTP.Client	SmtpClient+NoopAsyncOP
PX.Common.SMTP.Client	SmtpClientException
PX.Common.POP3	Pop3ExtendedCapabilities
PX.Common.POP3	Pop3Client
PX.Common.POP3	Pop3ClientException
PX.Common.POP3	Class
PX.Common.POP3	Pop3ClientMessage
PX.Common.POP3	Pop3ClientMessageCollection
PX.Common.IMAP	AclEntry
PX.Common.IMAP	ACLFlags
PX.Common.IMAP	Envelope

Namespace	Class
PX.Common.IMAP	FetchDataItem
PX.Common.IMAP	FetchDataItemBody
PX.Common.IMAP	FetchDataItemBodyPeek
PX.Common.IMAP	FetchDataItemEnvelope
PX.Common.IMAP	FetchDataItemFlags
PX.Common.IMAP	FetchDataItemInternalDate
PX.Common.IMAP	FetchDataItemRfc822
PX.Common.IMAP	FetchDataItemRfc822Header
PX.Common.IMAP	FetchDataItemRfc822Size
PX.Common.IMAP	FetchDataItemRfc822Text
PX.Common.IMAP	FetchDataItemUid
PX.Common.IMAP	FlagsSetType
PX.Common.IMAP	MessageFlags
PX.Common.IMAP	NamespaceEntry
PX.Common.IMAP	QuotaEntry
PX.Common.IMAP	Response
PX.Common.IMAP	ResponseServerStatus
PX.Common.IMAP	ResponseUntagged
PX.Common.IMAP	ResponseUntaggedAcl

Namespace	Class
PX.Common.IMAP	ResponseUntaggedCapability
PX.Common.IMAP	ResponseUntaggedExpunge
PX.Common.IMAP	ResponseUntaggedList
PX.Common.IMAP	ResponseUntaggedListRights
PX.Common.IMAP	ResponseUntaggedLSub
PX.Common.IMAP	ResponseMyRights
PX.Common.IMAP	ResponseUntaggedNamespace
PX.Common.IMAP	ResponseUntaggedQuota
PX.Common.IMAP	ResponseUntaggedQuotaRoot
PX.Common.IMAP	ResponseUntaggedServerStatus
PX.Common.IMAP	Class
PX.Common.IMAP	ResponseUntaggedStatus
PX.Common.IMAP	SearchKey
PX.Common.IMAP	SearchKeyAnswered
PX.Common.IMAP	SearchKeyBcc
PX.Common.IMAP	SearchKeyBefore
PX.Common.IMAP	SearchKeyBody
PX.Common.IMAP	SearchKeyCc
PX.Common.IMAP	SearchKeyDeleted

Namespace	Class
PX.Common.IMAP	SearchKeyDraft
PX.Common.IMAP	SearchKeyFlagged
PX.Common.IMAP	SearchKeyFrom
PX.Common.IMAP	SearchKeyGroup
PX.Common.IMAP	SearchKeyHeader
PX.Common.IMAP	SearchKeyKeyword
PX.Common.IMAP	SearchKeyLarger
PX.Common.IMAP	SearchKeyNew
PX.Common.IMAP	SearchKeyNot
PX.Common.IMAP	SearchKeyOld
PX.Common.IMAP	SearchKeyOn
PX.Common.IMAP	SearchKeyOr
PX.Common.IMAP	SearchKeyRecent
PX.Common.IMAP	SearchKeySeen
PX.Common.IMAP	SearchKeySentBefore
PX.Common.IMAP	SearchKeySentOn
PX.Common.IMAP	SearchKeySentSince
PX.Common.IMAP	SearchKeySeqSet
PX.Common.IMAP	SearchKeySince

Namespace	Class
PX.Common.IMAP	SearchKeySmaller
PX.Common.IMAP	SearchKeySubject
PX.Common.IMAP	SearchKeyText
PX.Common.IMAP	SearchKeyTo
PX.Common.IMAP	SearchKeyUid
PX.Common.IMAP	SearchKeyUnanswered
PX.Common.IMAP	SearchKeyUndeleted
PX.Common.IMAP	Class
PX.Common.IMAP	SearchKeyUndraft
PX.Common.IMAP	SearchKeyUnflagged
PX.Common.IMAP	SearchKeyUnkeyword
PX.Common.IMAP	SearchKeyUnseen
PX.Common.IMAP	SequenceSet
PX.Common.IMAP	Utils
PX.Common.IMAP.Client	ImapClient
PX.Common.IMAP.Client	ImapClientException
PX.Common.IMAP.Client	ImapClientFetchBodyEArgs
PX.Common.IMAP.Client	ImapClientFetchHandler
PX.Common.IMAP.Client	ImapClientFetchRfc822EArgs

Namespace	Class
PX.Common.IMAP.Client	ImapClientSelectedFolder
PX.Data	PXAccessProviderCollection
PX.Data	PXErrorContextProcessingException
PX.Data	PXSessionRollbackException
PX.Data	PXDatabaseProviderCollection
PX.Data	Events+Event<EventArgs,Impl>+Adapter
PX.Data	Events+Event<EventArgs,Impl>+AdapterInterceptor
PX.Data.Auth	ExternalAuthenticationModule+PXClaimPrincipalWrapper
PX.Data.EP	DynamicAttachmentManager+IHandler
PX.Data.Access	ServiceRegistration
PX.Data.Access	ActiveDirectoryProvider+LazyInitializable<T>
PX.Api.Payroll	IDynamicSettingsUpdateObserver
PX.Api.Payroll	IBaseDynamicSettingsUpdateObserver
PX.Api.Payroll	IStaticImplicitDynamicSettingsUpdateObserver
PX.Api.Payroll	IPayrollBaseService
PX.Api.Payroll	IPayrollUpdateService
PX.Api.Payroll	PayrollBaseProxy<TPayrollProxy>
PX.Api.Payroll	PayrollUpdateClient
PX.Api.Payroll	PayrollClientBase<TPayrollService>

Namespace	Class
PX.Api.Payroll	PayrollServiceLicenseHelper
PX.Api.Payroll	PayrollWebServiceConfiguration
PX.Api.Payroll	PXPayrollAssemblyScope
PX.Api.Payroll	PXPayrollAssemblyScope<TPayrollProxy>
PX.Objects.RQ	RQRequisitionProcess+NullAction
PX.Objects.SO	SOOrderEntry_ApprovalWorkflow
PX.Objects.PO	POLineR+FK+Order
PX.Objects.PO.LandedCosts.Attributes	LandedCostDocSetStatusAttribute
PX.Objects.PM	PMCommitmentSelect
PX.Objects.PM	PMCommitmentSelect<T,Where>
PX.Objects.PM	POCommitmentExAttribute
PX.Objects.PM	SOCommitmentAttribute
PX.Objects.PM	SOCommitmentMiscLineAttribute
PX.Objects.PM	SOCommitmentLine4Attribute
PX.Objects.IN.WMS	ScanDACMapping
PX.Objects.IN.WMS	ScanHeaderMapping
PX.Objects.IN.WMS	ScanLineMapping
PX.Objects.IN.WMS	ScanSplitMapping

Namespace	Class
PX.Objects.IN.WMS	CartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph,TScanDocument,TScanLine>
PX.Objects.IN.WMS	CartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph,TScanDocument,TScanLine>+DynamicDecimalField<TSelfField>
PX.Objects.IN.WMS	CartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph,TScanDocument,TScanLine>+CartQtyExt<TCartQty>
PX.Objects.IN.WMS	CartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph,TScanDocument,TScanLine>+ScanCommands
PX.Objects.IN.WMS	CartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph,TScanDocument,TScanLine>+Msg
PX.Objects.IN.WMS	CartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph,TScanDocument,TScanLine>+ScanStates
PX.Objects.IN.GraphExtensions.INItemClassMaint	VariantAttributesExt
PX.Objects.DR	SchedulesFilterVisibilityRestriction
PX.Objects.CT	Contract+FK+DefaultAccount
PX.Objects.CT	Contract+FK+DefaultSubaccount
PX.Objects.EP	MsgNotLocalizable
PX.Objects.CN.Subcontracts.P O.GraphExtensions	PoPrintOrderExt
PX.Objects.CR	BAccountR+status+holdPayments
PX.Objects.CR.WebUI	OUSearchMaintWebUI+Actions+logOut
PX.Objects.AR	Customer+status+ListAttribute
PX.Objects.AR	RestrictCustomerBySource
PX.Objects.AR	RestrictBranchBySource

Namespace	Class
PX.Objects.AR.VisibilityRestriction.CacheExtensions	ARDocumentFilterVisibilityRestriction
PX.Objects.AR.CCPaymentProcessing.Helpers	TranValidationHelper+TranValidationException
PX.Objects.AR.CCPaymentProcessing.Common	CCPaymentState
PX.Objects.AP	Vendor+status+ListAttribute
PX.Objects.FS	AppointmentEntry+int_24hrs
PX.Objects.FS	AppointmentCore
PX.Objects.FS	AppointmentCore+AppointmentRecords_View
PX.Objects.FS	AppointmentCore+AppointmentSelected_View
PX.Objects.FS	AppointmentCore+AppointmentDetails_View
PX.Objects.FS	AppointmentCore+AppointmentServiceEmployees_View
PX.Objects.FS	AppointmentCore+AppointmentResources_View
PX.Objects.FS	AppointmentCore+AppointmentLog_View
PX.Objects.FS	AppointmentCore+ServiceOrderRelated_View
PX.Objects.FS	AutoNumberHelper
PX.Objects.FS	ContactAddressHelper
PX.Objects.FS	FSMailProcess
PX.Objects.FS	FSMailProcess+FSMailing

Namespace	Class
PX.Objects.FS	FSMailProcess+FSNotificationContactType
PX.Objects.FS	InvoicingFunctions
PX.Objects.FS	InvoicingFunctions+ContactAddressSource
PX.Objects.FS	ListField_Status_Appointment
PX.Objects.FS	ListField_Status_Appointment+ListAttribute
PX.Objects.FS	ListField_Status_Appointment+AutomaticScheduled
PX.Objects.FS	ListField_Status_Appointment+ManualScheduled
PX.Objects.FS	ListField_Status_Appointment+InProgress
PX.Objects.FS	ListField_Status_Appointment+Canceled
PX.Objects.FS	ListField_Status_Appointment+Completed
PX.Objects.FS	ListField_Status_Appointment+Closed
PX.Objects.FS	ListField_Status_Appointment+OnHold
PX.Objects.FS	ListField_Status_Appointment+Paused
PX.Objects.FS	ListField_Status_ServiceOrder
PX.Objects.FS	ListField_Status_ServiceOrder+ListAttribute
PX.Objects.FS	ListField_Status_ServiceOrder+Open
PX.Objects.FS	ListField_Status_ServiceOrder+Quote
PX.Objects.FS	ListField_Status_ServiceOrder+Hold
PX.Objects.FS	ListField_Status_ServiceOrder+Canceled

Namespace	Class
PX.Objects.FS	ListField_Status_ServiceOrder+Closed
PX.Objects.FS	ListField_Status_ServiceOrder+Completed
PX.Objects.FS	ListField_Status_ContractPeriod+ListAttribute
PX.Objects.FS	ListField_Behavior_SrvOrdType
PX.Objects.FS	ListField_Behavior_SrvOrdType+ListAttribute
PX.Objects.FS	ListField_Behavior_SrvOrdType+RegularAppointment
PX.Objects.FS	ListField_Behavior_SrvOrdType+RouteAppointment
PX.Objects.FS	ListField_Behavior_SrvOrdType+InternalAppointment
PX.Objects.FS	ListField_Behavior_SrvOrdType+Quote
PX.Objects.FS	LongOperationHelper
PX.Objects.FS	ServiceContractCore
PX.Objects.FS	ServiceContractCore+ServiceContract_View
PX.Objects.FS	ServiceOrderAppointmentHandlers
PX.Objects.FS	ServiceOrderAppointmentHandlers+fakeField
PX.Objects.FS	ServiceOrderAppointmentHandlers+EventType
PX.Objects.FS	ServiceOrderCore
PX.Objects.FS	ServiceOrderCore+ServiceOrderTypeRouteRecords_View
PX.Objects.FS	ServiceOrderCore+ServiceOrderRecords_View
PX.Objects.FS	ServiceOrderCore+CurrentServiceOrder_View

Namespace	Class
PX.Objects.FS	ServiceOrderCore+ServiceOrderAppointments_View
PX.Objects.FS	ServiceOrderCore+ServiceOrderEmployees_View
PX.Objects.FS	ServiceOrderCore+ServiceOrderEquipment_View
PX.Objects.FS	ServiceOrderCore+RelatedServiceOrders_View
PX.Objects.FS	ServiceOrderCore+FSContact_View
PX.Objects.FS	ServiceOrderCore+FSAddress_View
PX.Objects.FS	ServiceOrderCore+ServiceOrderDetailsOrdered
PX.Objects.FS	SharedFunctions+SlotIsContained
PX.Objects.FS	SharedFunctions+TimeFormat
PX.Objects.FS	SharedFunctions+DateRange
PX.Objects.FS	SM_ARInvoiceEntry+CreateReversalARTranOrig
PX.Objects.FS	FSxARTran
PX.Objects.FS	FSxARTran+equipmentAction
PX.Objects.FS	ID+Status_Appointment
PX.Objects.FS	ID+Status_ServiceOrder
PX.Objects.FS	ID+Behavior_SrvOrderType
PX.Objects.FS	TX+Behavior_SrvOrderType
PX.Objects.FS	IPostDocLineExtension
PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail+schdEfficiencyTime

Namespace	Class
PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail+detailSchdEfficiencyTime
PX.Objects.PR	PaymentStatus+pendingPrintOrPayment
PX.Objects.PR	PaymentStatus+checkPrintedOrPaid
PX.Objects.PJ.DailyFieldReports.PJ.GraphExtensions	DailyFieldReportEntryApprovalExtension

Removed Methods

This section lists the public methods whose visibility has been changed in the code or that have been removed from the code. The list does not include the methods from the deleted and obsolete classes.

Total of 478 methods.

Method	Namespace	Parent Class
get_SessionStateStoreProviderSettings()	PX.Common	WebConfig
GetObjectData<T>(T,SerializationInfo)	PX.Common	PXReflectionSerializer
RestoreObjectProps<T>(T,SerializationInfo)	PX.Common	PXReflectionSerializer
.ctor()	PX.Common	ServiceRegistration
GetLongName(Type)	PX.Common	Tools
GetGenericSimpleName(Type)	PX.Common	Tools
Replace(String,Char[],Char)	PX.Common	Tools
CircularReference(String)	PX.Common.Parser	ExpressionException
get_HasExternalObjects()	PX.Common.Parser	ExpressionContext

Method	Namespace	Parent Class
get_Item(String)	PX.Common.Parser	ExpressionContext
set_Item(String,Object)	PX.Common.Parser	ExpressionContext
RegisterProperty(String,Object)	PX.Common.Parser	ExpressionContext
HasProperty(String)	PX.Common.Parser	ExpressionContext
GetExternalObject(String)	PX.Common.Parser	ExpressionContext
.ctor(ExpressionNode,String,ExpressionContext)	PX.Common.Parser	FunctionNode
.ctor(ExpressionNode,String,ExpressionContext)	PX.Common.Parser	NameNode
get_Login()	PX.Common.Mail	CredentialSettings
get_Password()	PX.Common.Mail	CredentialSettings
GetADUserByName(PXCache,String)	PX.SM	PXUsersSelectorAttribute
GetADUsers(PXCache)	PX.SM	PXUsersSelectorAttribute
GetAllUsers(PXGraph,BqlCommand)	PX.SM	PXUsersSelectorAttribute
GetADMappedRolesBySID(String)	PX.SM	PXUsersSelectorAttribute
.ctor()	PX.SM	PXSelectSiteMapTree<IsSecure,HideEmptyFolder,HideWikiNode,HideNodeThatCantBeAutomated,HideGenericInquiryNode>
.ctor(PXGraph,Delegate)	PX.SM	PXSelectSiteMapTree<IsSecure,HideEmptyFolder,HideWikiNode,HideNodeThatCantBeAutomated,HideGenericInquiryNode>
CreateView(PXGraph,Delegate)	PX.SM	PXSelectSiteMapTree<IsSecure,HideEmptyFolder,HideWikiNode,HideNodeThatCantBeAutomated,HideGenericInquiryNode>
sitemap(Nullable<Guid>)	PX.SM	PXSelectSiteMapTree<IsSecure,HideEmptyFolder,HideWikiNode,HideNodeThatCantBeAutomated,HideGenericInquiryNode>

Method	Namespace	Parent Class
.ctor()	PX.SM	SuppressWorkflowAutoPersistScope
PersistUpdated(IEnumerable<UPCompany>)	PX.SM	CompanyMaint
PersistSnapshot(UPCompany, ImportSnapshotSettings, UPSnapshot, ISnapshotsService, ICacheControl<PageCache>, IScreenInfoCacheControl)	PX.SM	CompanyMaint
get_IsActiveDirectoryUser()	PX.Data	PXAccess
get_IsClaimUser()	PX.Data	PXAccess
get_IsGuest()	PX.Data	PXAccess
GetCompanies()	PX.Data	PXAccess
get_OrganizationGroupID()	PX.Data	PXAccess+Organization
set_OrganizationGroupID(Nullable<Int32>)	PX.Data	PXAccess+Organization
get_Parent()	PX.Data	PXAccess+MasterCollection+Organization
Prefetch()	PX.Data	PXAccess+BranchCollection
get_DBTables()	PX.Data	PXAccess+BranchCollection
TryGetValue(String, PXAccess+BranchCollection+Info[]&)	PX.Data	PXAccess+BranchCollection
.ctor()	PX.Data	PXAccess+BranchCollection
.ctor(Int32, String, String, Boolean)	PX.Data	PXAccess+BranchCollection+Info
getAllNestedTypes(Type, Boolean, PXCache+fieldContainer&)	PX.Data	PXCache
get_RecordsUpdater()	PX.Data	PXSearchableAttribute
set_RecordsUpdater(PXSearchableAttribute+UserRecordsUpdater)	PX.Data	PXSearchableAttribute

Method	Namespace	Parent Class
AddAction(PXGraph,String,String,PXButtonDelegate)	PX.Data	PXOrderedSelectBase<Primary,Table>
get_Initialised()	PX.Data	ScheduleProcessor
ClearLoggedSkippedSchedules()	PX.Data	ScheduleProcessor
Initialize(Boolean)	PX.Data	ScheduleProcessor
.ctor()	PX.Data	ScheduleProcessor
Execute(Boolean)	PX.Data	ScheduleProcessor
IsElectionWon()	PX.Data	ScheduleProcessor
WatchSingle(Boolean)	PX.Data	ScheduleProcessor
WatchMulti(String[],Boolean,Boolean)	PX.Data	ScheduleProcessor
IsLicenseSuspended(PXLicense)	PX.Data.Unit	LicensePolicyMock
set_DisablePersist(Boolean)	PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+ActionDefinition
PlaceBefore(Func<BoundedTo<TGraph,TPrimary>+Transition+INeedSource,BoundedTo<TGraph,TPrimary>+Transition+IConfigured>)	PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+Transition+IAllowOptionalConfig
PlaceAfter(Func<BoundedTo<TGraph,TPrimary>+Transition+INeedSource,BoundedTo<TGraph,TPrimary>+Transition+IConfigured>)	PX.Data.WorkflowAPI	BoundedTo<TGraph,TPrimary>+Transition+IAllowOptionalConfig
.ctor()	PX.Data.Services	CompanyService
get_ScreenID()	PX.Data.Maintenance.GI	GINavigationScreen
set_ScreenID(String)	PX.Data.Maintenance.GI	GINavigationScreen

Method	Namespace	Parent Class
Reset()	PX.Data.Access	ActiveDirectoryProvider+LazyInitializable<T>
Get(Func<T>)	PX.Data.Access	ActiveDirectoryProvider+LazyInitializable<T>
get_Initialized()	PX.Data.Access	ActiveDirectoryProvider+LazyInitializable<T>
.ctor()	PX.Data.Access	ActiveDirectoryProvider+LazyInitializable<T>
.ctor()	PX.TM	SubordinateAndWingmenOwnerAttribute
get_Status()	PX.TM	PXOwnerSelectorAttribute+EPEmployee
set_Status(String)	PX.TM	PXOwnerSelectorAttribute+EPEmployee
get_ReqNbr()	PX.Objects.RQ	RQRequisitionOrder
set_ReqNbr(String)	PX.Objects.RQ	RQRequisitionOrder
get_OrderCategory()	PX.Objects.RQ	RQRequisitionOrder
set_OrderCategory(String)	PX.Objects.RQ	RQRequisitionOrder
get_OrderType()	PX.Objects.RQ	RQRequisitionOrder
set_OrderType(String)	PX.Objects.RQ	RQRequisitionOrder
get_OrderNbr()	PX.Objects.RQ	RQRequisitionOrder
set_OrderNbr(String)	PX.Objects.RQ	RQRequisitionOrder
Hold(PXAdapter)	PX.Objects.RQ	RQRequestEntry
Hold(PXAdapter)	PX.Objects.RQ	RQRequisitionEntry
get_MyOwner()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_MyOwner(Nullable<Boolean>)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection

Method	Namespace	Parent Class
get_MyWorkGroup()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_MyWorkGroup(Nullable<Boolean>)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_MyEscalated()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_MyEscalated(Nullable<Boolean>)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_Action()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_Action(String)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_SelectedPriority()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_SelectedPriority(Nullable<Int32>)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_VendorID()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_VendorID(Nullable<Int32>)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_EmployeeID()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_EmployeeID(Nullable<Int32>)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_Description()	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
set_Description(String)	PX.Objects.RQ	RQRequisitionProcess+RQRequisitionSelection
get_CommitmentID()	PX.Objects.SO	SOLine
set_CommitmentID(Nullable<Guid>)	PX.Objects.SO	SOLine
get_RequireLocation()	PX.Objects.SO	SOOrderType
set_RequireLocation(Nullable<Boolean>)	PX.Objects.SO	SOOrderType
get_CommitmentTracking()	PX.Objects.SO	SOOrderType

Method	Namespace	Parent Class
set_CommitmentTracking(Nullable<Boolean>)	PX.Objects.SO	SOOrderType
PrintInvoice(PXAdapter)	PX.Objects.SO	SOInvoiceEntry
AREdit(PXAdapter)	PX.Objects.SO	SOInvoiceEntry
EmailInvoice(PXAdapter)	PX.Objects.SO	SOInvoiceEntry
UpdateCreateINDocValue()	PX.Objects.SO	SOInvoiceEntry
POSupply()	PX.Objects.SO	SOOrderEntry
POSupplyOK(PXAdapter)	PX.Objects.SO	SOOrderEntry
POSupplyDialogInitializer(PXGraph,String)	PX.Objects.SO	SOOrderEntry
LinkSupplyDemand()	PX.Objects.SO	SOOrderEntry
EmailSalesOrder(PXAdapter)	PX.Objects.SO	SOOrderEntry
InventorySummary(PXAdapter)	PX.Objects.SO	SOOrderEntry
POCreateVerifyValue(PXCache,SOLine,Nullable<Boolean>)	PX.Objects.SO	SOOrderEntry
Configure(WorkflowContext<SOOrderEntry,SOOrder>)	PX.Objects.SO	SOOrderEntry_Workflow
get_CommitmentTracking()	PX.Objects.SO	SOOrderTypeMaint
EmailShipment(PXAdapter)	PX.Objects.SO	SOShipmentEntry
get_RequireLocation()	PX.Objects.SO	SOLine2
set_RequireLocation(Nullable<Boolean>)	PX.Objects.SO	SOLine2
get_RequireLocation()	PX.Objects.SO	SOLineSplit2
set_RequireLocation(Nullable<Boolean>)	PX.Objects.SO	SOLineSplit2

Method	Namespace	Parent Class
get_CommitmentID()	PX.Objects.SO	SOLine4
set_CommitmentID(Nullable<Guid>)	PX.Objects.SO	SOLine4
get_CommitmentID()	PX.Objects.SO	SOMiscLine2
set_CommitmentID(Nullable<Guid>)	PX.Objects.SO	SOMiscLine2
SetStatus()	PX.Objects.PO	POReceipt
get_UOM()	PX.Objects.PO	POFixedDemand
set_UOM(String)	PX.Objects.PO	POFixedDemand
ViewDemand(PXAdapter)	PX.Objects.PO	POOrderEntry
CheckOpenStatus(POOrder)	PX.Objects.PO	POOrderEntry
get_Action()	PX.Objects.PO	POPrintOrderFilter
set_Action(String)	PX.Objects.PO	POPrintOrderFilter
Approve(PXAdapter)	PX.Objects.PM	ChangeOrderEntry
Reject(PXAdapter)	PX.Objects.PM	ChangeOrderEntry
Action(PXAdapter)	PX.Objects.PM	ChangeOrderEntry
Report(PXAdapter)	PX.Objects.PM	ChangeOrderEntry
InitializeActionsMenu()	PX.Objects.PM	ChangeOrderEntry
InitializeReportsMenu()	PX.Objects.PM	ChangeOrderEntry
get_InvoicedIsReadOnly()	PX.Objects.PM	PMCommitment
set_InvoicedIsReadOnly(Nullable<Boolean>)	PX.Objects.PM	PMCommitment

Method	Namespace	Parent Class
get_RevenueCommitmentTracking()	PX.Objects.PM	PMSetup
set_RevenueCommitmentTracking(Nullable<Boolean>)	PX.Objects.PM	PMSetup
get_DefaultAccountID()	PX.Objects.PM	PMTask
set_DefaultAccountID(Nullable<Int32>)	PX.Objects.PM	PMTask
get_DefaultSubID()	PX.Objects.PM	PMTask
set_DefaultSubID(Nullable<Int32>)	PX.Objects.PM	PMTask
get_CostCodeFrom()	PX.Objects.PM	PMWorkCode
set_CostCodeFrom(String)	PX.Objects.PM	PMWorkCode
get_CostCodeTo()	PX.Objects.PM	PMWorkCode
Method	Namespace	Parent Class
set_CostCodeTo(String)	PX.Objects.PM	PMWorkCode
AddInvoiced(PXCache,PMCommitment,String,Nullable<DateTime>)	PX.Objects.PM	PMCommitmentAttribute
AddToInvoiced(PXCache,PMCommitment,String,Nullable<DateTime>)	PX.Objects.PM	PMCommitmentAttribute
CalculateOpenQty(Nullable<Decimal>,Nullable<Decimal>)	PX.Objects.PM	POCommitmentAttribute
CalculateOpenAmount(Nullable<Decimal>,Nullable<Decimal>,Nullable<Decimal>,Nullable<Decimal>)	PX.Objects.PM	POCommitmentAttribute
CalculateReceivedQty(Nullable<Decimal>,Nullable<Decimal>)	PX.Objects.PM	POCommitmentAttribute
.ctor(Type)	PX.Objects.PM	PMWorkCodeAttribute
InitializeActionsMenu()	PX.Objects.PM	ProformaEntryExternalTax

Method	Namespace	Parent Class
ConfigureNewTask(PMTask,PMQuoteTask)	PX.Objects.PM	PMQuoteMaint
Approve(PXAdapter)	PX.Objects.PM	ProformaEntry
Reject(PXAdapter)	PX.Objects.PM	ProformaEntry
Action(PXAdapter)	PX.Objects.PM	ProformaEntry
Report(PXAdapter)	PX.Objects.PM	ProformaEntry
InitializeActionsMenu()	PX.Objects.PM	ProformaEntry
InitializeReportsMenu()	PX.Objects.PM	ProformaEntry
ProcessPOCommitments(PMProject)	PX.Objects.PM	ProjectBalanceValidationProcess
ProcessSOCCommitments(PMProject)	PX.Objects.PM	ProjectBalanceValidationProcess
ProcessExternalCommitments(PMProject)	PX.Objects.PM	ProjectBalanceValidationProcess
Action(PXAdapter,Nullable<Int32>,Boolean,String)	PX.Objects.PM	ProjectEntry
Inquiry(PXAdapter)	PX.Objects.PM	ProjectEntry
Report(PXAdapter)	PX.Objects.PM	ProjectEntry
ViewRevenueCommitments(PXAdapter)	PX.Objects.PM	ProjectEntry
InitializeActionsMenu()	PX.Objects.PM	ProjectEntry
PopulateAndArrangeActionsMenuItems(List<ButtonMenu>)	PX.Objects.PM	ProjectEntry
ButtonMenuFromAction(PXAction)	PX.Objects.PM	ProjectEntry
InitializeInquiriesMenu()	PX.Objects.PM	ProjectEntry
InitializeReportsMenu()	PX.Objects.PM	ProjectEntry

Method	Namespace	Parent Class
CompleteProject(PMProject)	PX.Objects.PM	ProjectEntry
SetFlagsFromStatus(PMTask,String)	PX.Objects.PM	ProjectTaskEntry
GetValidStatusTargets(PMTask,String)	PX.Objects.PM	ProjectTaskEntry
ActivateTask(PMTask)	PX.Objects.PM	ProjectTaskEntry
CompleteTask(PMTask)	PX.Objects.PM	ProjectTaskEntry
get_ItemClassCD()	PX.Objects.IN	INItemClass
set_ItemClassCD(String)	PX.Objects.IN	INItemClass
get_Descr()	PX.Objects.IN	INItemClass
set_Descr(String)	PX.Objects.IN	INItemClass
get_StkItem()	PX.Objects.IN	INItemClass
set_StkItem(Nullable<Boolean>)	PX.Objects.IN	INItemClass
get_NegQty()	PX.Objects.IN	INItemClass
set_NegQty(Nullable<Boolean>)	PX.Objects.IN	INItemClass
get_ValMethod()	PX.Objects.IN	INItemClass
set_ValMethod(String)	PX.Objects.IN	INItemClass
get_BaseUnit()	PX.Objects.IN	INItemClass
set_BaseUnit(String)	PX.Objects.IN	INItemClass
get_SalesUnit()	PX.Objects.IN	INItemClass
set_SalesUnit(String)	PX.Objects.IN	INItemClass

Method	Namespace	Parent Class
get_PurchaseUnit()	PX.Objects.IN	INItemClass
set_PurchaseUnit(String)	PX.Objects.IN	INItemClass
get_DecimalBaseUnit()	PX.Objects.IN	INItemClass
set_DecimalBaseUnit(Nullable<Boolean>)	PX.Objects.IN	INItemClass
get_DecimalSalesUnit()	PX.Objects.IN	INItemClass
set_DecimalSalesUnit(Nullable<Boolean>)	PX.Objects.IN	INItemClass
get_DecimalPurchaseUnit()	PX.Objects.IN	INItemClass
set_DecimalPurchaseUnit(Nullable<Boolean>)	PX.Objects.IN	INItemClass
get_PostClassID()	PX.Objects.IN	INItemClass
set_PostClassID(String)	PX.Objects.IN	INItemClass
get_LotSerClassID()	PX.Objects.IN	INItemClass
set_LotSerClassID(String)	PX.Objects.IN	INItemClass
get_TaxCategoryID()	PX.Objects.IN	INItemClass
set_TaxCategoryID(String)	PX.Objects.IN	INItemClass
get_DeferredCode()	PX.Objects.IN	INItemClass
set_DeferredCode(String)	PX.Objects.IN	INItemClass
get_ItemType()	PX.Objects.IN	INItemClass
set_ItemType(String)	PX.Objects.IN	INItemClass
get_PriceClassID()	PX.Objects.IN	INItemClass

Method	Namespace	Parent Class
set_PriceClassID(String)	PX.Objects.IN	INItemClass
get_PriceWorkgroupID()	PX.Objects.IN	INItemClass
set_PriceWorkgroupID(Nullable<Int32>)	PX.Objects.IN	INItemClass
get_PriceManagerID()	PX.Objects.IN	INItemClass
set_PriceManagerID(Nullable<Int32>)	PX.Objects.IN	INItemClass
get_DfltSiteID()	PX.Objects.IN	INItemClass
set_DfltSiteID(Nullable<Int32>)	PX.Objects.IN	INItemClass
get_MinGrossProfitPct()	PX.Objects.IN	INItemClass
set_MinGrossProfitPct(Nullable<Decimal>)	PX.Objects.IN	INItemClass
get_MarkupPct()	PX.Objects.IN	INItemClass
set_MarkupPct(Nullable<Decimal>)	PX.Objects.IN	INItemClass
get_NoteID()	PX.Objects.IN	INItemClass
set_NoteID(Nullable<Guid>)	PX.Objects.IN	INItemClass
get_DemandCalculation()	PX.Objects.IN	INItemClass
set_DemandCalculation(String)	PX.Objects.IN	INItemClass
get_CreatedByID()	PX.Objects.IN	INItemClass
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INItemClass
get_AccrueCost()	PX.Objects.IN	INItemClass
set_AccrueCost(Nullable<Boolean>)	PX.Objects.IN	INItemClass

Method	Namespace	Parent Class
get_CreatedByScreenID()	PX.Objects.IN	INItemClass
set_CreatedByScreenID(String)	PX.Objects.IN	INItemClass
get_CreatedDateTime()	PX.Objects.IN	INItemClass
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INItemClass
get_LastModifiedByID()	PX.Objects.IN	INItemClass
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INItemClass
get_LastModifiedByScreenID()	PX.Objects.IN	INItemClass
set_LastModifiedByScreenID(String)	PX.Objects.IN	INItemClass
get_LastModifiedDateTime()	PX.Objects.IN	INItemClass
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INItemClass
get_GroupMask()	PX.Objects.IN	INItemClass
set_GroupMask(Byte[])	PX.Objects.IN	INItemClass
get_tstamp()	PX.Objects.IN	INItemClass
set_tstamp(Byte[])	PX.Objects.IN	INItemClass
get_Included()	PX.Objects.IN	INItemClass
set_Included(Nullable<Boolean>)	PX.Objects.IN	INItemClass
get_ItemClassID()	PX.Objects.IN	FilterItemByClass
set_ItemClassID(Nullable<Int32>)	PX.Objects.IN	FilterItemByClass
get_InventoryID()	PX.Objects.IN	FilterItemByClass

Method	Namespace	Parent Class
set_InventoryID(Nullable<Int32>)	PX.Objects.IN	FilterItemByClass
get_PIID()	PX.Objects.IN	INPIHeader
set_PIID(String)	PX.Objects.IN	INPIHeader
get_Descr()	PX.Objects.IN	INPIHeader
set_Descr(String)	PX.Objects.IN	INPIHeader
get_LineCntr()	PX.Objects.IN	INPIHeader
set_LineCntr(Nullable<Int32>)	PX.Objects.IN	INPIHeader
get_TagNumbered()	PX.Objects.IN	INPIHeader
set_TagNumbered(Nullable<Boolean>)	PX.Objects.IN	INPIHeader
get_FirstTagNbr()	PX.Objects.IN	INPIHeader
set_FirstTagNbr(Nullable<Int32>)	PX.Objects.IN	INPIHeader
get_FinPeriodID()	PX.Objects.IN	INPIHeader
set_FinPeriodID(String)	PX.Objects.IN	INPIHeader
get_TranPeriodID()	PX.Objects.IN	INPIHeader
set_TranPeriodID(String)	PX.Objects.IN	INPIHeader
get_PIAAdjAcctID()	PX.Objects.IN	INPIHeader
set_PIAAdjAcctID(Nullable<Int32>)	PX.Objects.IN	INPIHeader
get_PIAAdjSubID()	PX.Objects.IN	INPIHeader
set_PIAAdjSubID(Nullable<Int32>)	PX.Objects.IN	INPIHeader

Method	Namespace	Parent Class
get_SitelD()	PX.Objects.IN	INPIHeader
set_SitelD(Nullable<Int32>)	PX.Objects.IN	INPIHeader
get_Status()	PX.Objects.IN	INPIHeader
set_Status(String)	PX.Objects.IN	INPIHeader
get_CountDate()	PX.Objects.IN	INPIHeader
set_CountDate(Nullable<DateTime>)	PX.Objects.IN	INPIHeader
get_PIAAdjRefNbr()	PX.Objects.IN	INPIHeader
set_PIAAdjRefNbr(String)	PX.Objects.IN	INPIHeader
get_PIRcptRefNbr()	PX.Objects.IN	INPIHeader
set_PIRcptRefNbr(String)	PX.Objects.IN	INPIHeader
get_TotalPhysicalQty()	PX.Objects.IN	INPIHeader
set_TotalPhysicalQty(Nullable<Decimal>)	PX.Objects.IN	INPIHeader
get_TotalVarQty()	PX.Objects.IN	INPIHeader
set_TotalVarQty(Nullable<Decimal>)	PX.Objects.IN	INPIHeader
get_TotalVarCost()	PX.Objects.IN	INPIHeader
set_TotalVarCost(Nullable<Decimal>)	PX.Objects.IN	INPIHeader
get_TotalNbrOfTags()	PX.Objects.IN	INPIHeader
set_TotalNbrOfTags(Nullable<Int32>)	PX.Objects.IN	INPIHeader
get_NotelD()	PX.Objects.IN	INPIHeader

Method	Namespace	Parent Class
set_NoteID(Nullable<Guid>)	PX.Objects.IN	INPIHeader
get_CreatedByID()	PX.Objects.IN	INPIHeader
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INPIHeader
get_CreatedByScreenID()	PX.Objects.IN	INPIHeader
set_CreatedByScreenID(String)	PX.Objects.IN	INPIHeader
get_CreatedDateTime()	PX.Objects.IN	INPIHeader
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INPIHeader
get_LastModifiedByID()	PX.Objects.IN	INPIHeader
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INPIHeader
get_LastModifiedByScreenID()	PX.Objects.IN	INPIHeader
set_LastModifiedByScreenID(String)	PX.Objects.IN	INPIHeader
get_LastModifiedDateTime()	PX.Objects.IN	INPIHeader
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INPIHeader
get_tstamp()	PX.Objects.IN	INPIHeader
set_tstamp(Byte[])	PX.Objects.IN	INPIHeader
get_Selected()	PX.Objects.IN	INRegister
set_Selected(Nullable<Boolean>)	PX.Objects.IN	INRegister
get_BranchID()	PX.Objects.IN	INRegister
set_BranchID(Nullable<Int32>)	PX.Objects.IN	INRegister

Method	Namespace	Parent Class
get_DocType()	PX.Objects.IN	INRegister
set_DocType(String)	PX.Objects.IN	INRegister
get_RefNbr()	PX.Objects.IN	INRegister
set_RefNbr(String)	PX.Objects.IN	INRegister
get_OrigModule()	PX.Objects.IN	INRegister
set_OrigModule(String)	PX.Objects.IN	INRegister
get_OrigRefNbr()	PX.Objects.IN	INRegister
set_OrigRefNbr(String)	PX.Objects.IN	INRegister
get_SitID()	PX.Objects.IN	INRegister
set_SitID(Nullable<Int32>)	PX.Objects.IN	INRegister
get_ToSitID()	PX.Objects.IN	INRegister
set_ToSitID(Nullable<Int32>)	PX.Objects.IN	INRegister
get_TransferType()	PX.Objects.IN	INRegister
set_TransferType(String)	PX.Objects.IN	INRegister
get_TransferNbr()	PX.Objects.IN	INRegister
set_TransferNbr(String)	PX.Objects.IN	INRegister
get_TranDesc()	PX.Objects.IN	INRegister
set_TranDesc(String)	PX.Objects.IN	INRegister
get_Released()	PX.Objects.IN	INRegister

Method	Namespace	Parent Class
set_Released(Nullable<Boolean>)	PX.Objects.IN	INRegister
get_Hold()	PX.Objects.IN	INRegister
set_Hold(Nullable<Boolean>)	PX.Objects.IN	INRegister
get_Status()	PX.Objects.IN	INRegister
set_Status(String)	PX.Objects.IN	INRegister
get_TranDate()	PX.Objects.IN	INRegister
set_TranDate(Nullable<DateTime>)	PX.Objects.IN	INRegister
get_FinPeriodID()	PX.Objects.IN	INRegister
set_FinPeriodID(String)	PX.Objects.IN	INRegister
get_TranPeriodID()	PX.Objects.IN	INRegister
set_TranPeriodID(String)	PX.Objects.IN	INRegister
get_LineCntr()	PX.Objects.IN	INRegister
set_LineCntr(Nullable<Int32>)	PX.Objects.IN	INRegister
get_TotalQty()	PX.Objects.IN	INRegister
set_TotalQty(Nullable<Decimal>)	PX.Objects.IN	INRegister
get_TotalAmount()	PX.Objects.IN	INRegister
set_TotalAmount(Nullable<Decimal>)	PX.Objects.IN	INRegister
get_TotalCost()	PX.Objects.IN	INRegister
set_TotalCost(Nullable<Decimal>)	PX.Objects.IN	INRegister

Method	Namespace	Parent Class
get_ControlQty()	PX.Objects.IN	INRegister
set_ControlQty(Nullable<Decimal>)	PX.Objects.IN	INRegister
get_ControlAmount()	PX.Objects.IN	INRegister
set_ControlAmount(Nullable<Decimal>)	PX.Objects.IN	INRegister
get_ControlCost()	PX.Objects.IN	INRegister
set_ControlCost(Nullable<Decimal>)	PX.Objects.IN	INRegister
get_BatchNbr()	PX.Objects.IN	INRegister
set_BatchNbr(String)	PX.Objects.IN	INRegister
get_ExtRefNbr()	PX.Objects.IN	INRegister
set_ExtRefNbr(String)	PX.Objects.IN	INRegister
get_KitInventoryID()	PX.Objects.IN	INRegister
set_KitInventoryID(Nullable<Int32>)	PX.Objects.IN	INRegister
get_KitRevisionID()	PX.Objects.IN	INRegister
set_KitRevisionID(String)	PX.Objects.IN	INRegister
get_KitLineNbr()	PX.Objects.IN	INRegister
set_KitLineNbr(Nullable<Int32>)	PX.Objects.IN	INRegister
get_SOOrderType()	PX.Objects.IN	INRegister
set_SOOrderType(String)	PX.Objects.IN	INRegister
get_SOOrderNbr()	PX.Objects.IN	INRegister

Method	Namespace	Parent Class
set_SOOrderNbr(String)	PX.Objects.IN	INRegister
get_SOShipmentType()	PX.Objects.IN	INRegister
set_SOShipmentType(String)	PX.Objects.IN	INRegister
get_SOShipmentNbr()	PX.Objects.IN	INRegister
set_SOShipmentNbr(String)	PX.Objects.IN	INRegister
get_POReceiptType()	PX.Objects.IN	INRegister
set_POReceiptType(String)	PX.Objects.IN	INRegister
get_POReceiptNbr()	PX.Objects.IN	INRegister
set_POReceiptNbr(String)	PX.Objects.IN	INRegister
get_CreatedByID()	PX.Objects.IN	INRegister
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INRegister
get_CreatedByScreenID()	PX.Objects.IN	INRegister
set_CreatedByScreenID(String)	PX.Objects.IN	INRegister
get_CreatedDateTime()	PX.Objects.IN	INRegister
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INRegister
get_LastModifiedByID()	PX.Objects.IN	INRegister
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INRegister
get_LastModifiedByScreenID()	PX.Objects.IN	INRegister
set_LastModifiedByScreenID(String)	PX.Objects.IN	INRegister

Method	Namespace	Parent Class
get_LastModifiedDateTime()	PX.Objects.IN	INRegister
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INRegister
get_NoteID()	PX.Objects.IN	INRegister
set_NoteID(Nullable<Guid>)	PX.Objects.IN	INRegister
get_tstamp()	PX.Objects.IN	INRegister
set_tstamp(Byte[])	PX.Objects.IN	INRegister
get_IsPPVTran()	PX.Objects.IN	INRegister
set_IsPPVTran(Nullable<Boolean>)	PX.Objects.IN	INRegister
SetStatus()	PX.Objects.IN	INRegister
get_TransferNbr()	PX.Objects.IN	INTransferInTransit
set_TransferNbr(String)	PX.Objects.IN	INTransferInTransit
get_RefNoteID()	PX.Objects.IN	INTransferInTransit
set_RefNoteID(Nullable<Guid>)	PX.Objects.IN	INTransferInTransit
get_RefNbr()	PX.Objects.IN	INTranInTransit
set_RefNbr(String)	PX.Objects.IN	INTranInTransit
get_LineNbr()	PX.Objects.IN	INTranInTransit
set_LineNbr(Nullable<Int32>)	PX.Objects.IN	INTranInTransit
get_OrigModule()	PX.Objects.IN	INTranInTransit
set_OrigModule(String)	PX.Objects.IN	INTranInTransit

Method	Namespace	Parent Class
get_CostSiteID()	PX.Objects.IN	INCostSite
set_CostSiteID(Nullable<Int32>)	PX.Objects.IN	INCostSite
get_tstamp()	PX.Objects.IN	INCostSite
set_tstamp(Byte[])	PX.Objects.IN	INCostSite
get_SiteID()	PX.Objects.IN	INSite
set_SiteID(Nullable<Int32>)	PX.Objects.IN	INSite
get_SiteCD()	PX.Objects.IN	INSite
set_SiteCD(String)	PX.Objects.IN	INSite
get_Descr()	PX.Objects.IN	INSite
set_Descr(String)	PX.Objects.IN	INSite
get_ReasonCodeSubID()	PX.Objects.IN	INSite
set_ReasonCodeSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_SalesAcctID()	PX.Objects.IN	INSite
set_SalesAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_SalesSubID()	PX.Objects.IN	INSite
set_SalesSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_InvtAcctID()	PX.Objects.IN	INSite
set_InvtAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_InvtSubID()	PX.Objects.IN	INSite

Method	Namespace	Parent Class
set_InvtSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_COGSAcctID()	PX.Objects.IN	INSite
set_COGSAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_COGSSubID()	PX.Objects.IN	INSite
set_COGSSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_StdCstRevAcctID()	PX.Objects.IN	INSite
set_StdCstRevAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_StdCstRevSubID()	PX.Objects.IN	INSite
set_StdCstRevSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_StdCstVarAcctID()	PX.Objects.IN	INSite
set_StdCstVarAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_StdCstVarSubID()	PX.Objects.IN	INSite
set_StdCstVarSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_PPVAcctID()	PX.Objects.IN	INSite
set_PPVAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_PPVSubID()	PX.Objects.IN	INSite
set_PPVSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_POAccrualAcctID()	PX.Objects.IN	INSite
set_POAccrualAcctID(Nullable<Int32>)	PX.Objects.IN	INSite

Method	Namespace	Parent Class
get_POAccrualSubID()	PX.Objects.IN	INSite
set_POAccrualSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_LCVarianceAcctID()	PX.Objects.IN	INSite
set_LCVarianceAcctID(Nullable<Int32>)	PX.Objects.IN	INSite
get_LCVarianceSubID()	PX.Objects.IN	INSite
set_LCVarianceSubID(Nullable<Int32>)	PX.Objects.IN	INSite
get_ReceiptLocationID()	PX.Objects.IN	INSite
set_ReceiptLocationID(Nullable<Int32>)	PX.Objects.IN	INSite
get_ReceiptLocationIDOverride()	PX.Objects.IN	INSite
set_ReceiptLocationIDOverride(Nullable<Boolean>)	PX.Objects.IN	INSite
get_ShipLocationID()	PX.Objects.IN	INSite
set_ShipLocationID(Nullable<Int32>)	PX.Objects.IN	INSite
get_ShipLocationIDOverride()	PX.Objects.IN	INSite
set_ShipLocationIDOverride(Nullable<Boolean>)	PX.Objects.IN	INSite
get_DropShipLocationID()	PX.Objects.IN	INSite
set_DropShipLocationID(Nullable<Int32>)	PX.Objects.IN	INSite
get_ReturnLocationID()	PX.Objects.IN	INSite
set_ReturnLocationID(Nullable<Int32>)	PX.Objects.IN	INSite
get_LocationValid()	PX.Objects.IN	INSite

Method	Namespace	Parent Class
set_LocationValid(String)	PX.Objects.IN	INSite
get_BranchID()	PX.Objects.IN	INSite
set_BranchID(Nullable<Int32>)	PX.Objects.IN	INSite
get_AddressID()	PX.Objects.IN	INSite
set_AddressID(Nullable<Int32>)	PX.Objects.IN	INSite
get_ContactID()	PX.Objects.IN	INSite
set_ContactID(Nullable<Int32>)	PX.Objects.IN	INSite
get_NoteID()	PX.Objects.IN	INSite
set_NoteID(Nullable<Guid>)	PX.Objects.IN	INSite
get_ReplenishmentClassID()	PX.Objects.IN	INSite
set_ReplenishmentClassID(String)	PX.Objects.IN	INSite
get_AvgDefaultCost()	PX.Objects.IN	INSite
set_AvgDefaultCost(String)	PX.Objects.IN	INSite
get_FIFODefaultCost()	PX.Objects.IN	INSite
set_FIFODefaultCost(String)	PX.Objects.IN	INSite
get_OverrideInvAccSub()	PX.Objects.IN	INSite
set_OverrideInvAccSub(Nullable<Boolean>)	PX.Objects.IN	INSite
get_CreatedByID()	PX.Objects.IN	INSite
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INSite

Method	Namespace	Parent Class
get_CreatedByScreenID()	PX.Objects.IN	INSite
set_CreatedByScreenID(String)	PX.Objects.IN	INSite
get_CreatedDateTime()	PX.Objects.IN	INSite
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INSite
get_LastModifiedByID()	PX.Objects.IN	INSite
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INSite
get_LastModifiedByScreenID()	PX.Objects.IN	INSite
set_LastModifiedByScreenID(String)	PX.Objects.IN	INSite
get_LastModifiedDateTime()	PX.Objects.IN	INSite
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INSite
get_tstamp()	PX.Objects.IN	INSite
set_tstamp(Byte[])	PX.Objects.IN	INSite
get_GroupMask()	PX.Objects.IN	INSite
set_GroupMask(Byte[])	PX.Objects.IN	INSite
get_Included()	PX.Objects.IN	INSite
set_Included(Nullable<Boolean>)	PX.Objects.IN	INSite
get_Selected()	PX.Objects.IN	InventoryItem
set_Selected(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_InventoryID()	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
set_InventoryID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_InventoryCD()	PX.Objects.IN	InventoryItem
set_InventoryCD(String)	PX.Objects.IN	InventoryItem
get_StkItem()	PX.Objects.IN	InventoryItem
set_StkItem(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_Descr()	PX.Objects.IN	InventoryItem
set_Descr(String)	PX.Objects.IN	InventoryItem
get_ItemClassID()	PX.Objects.IN	InventoryItem
set_ItemClassID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_ParentItemClassID()	PX.Objects.IN	InventoryItem
set_ParentItemClassID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_ItemStatus()	PX.Objects.IN	InventoryItem
set_ItemStatus(String)	PX.Objects.IN	InventoryItem
get_ItemType()	PX.Objects.IN	InventoryItem
set_ItemType(String)	PX.Objects.IN	InventoryItem
get_ValMethod()	PX.Objects.IN	InventoryItem
set_ValMethod(String)	PX.Objects.IN	InventoryItem
get_BaseUnit()	PX.Objects.IN	InventoryItem
set_BaseUnit(String)	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
get_SalesUnit()	PX.Objects.IN	InventoryItem
set_SalesUnit(String)	PX.Objects.IN	InventoryItem
get_PurchaseUnit()	PX.Objects.IN	InventoryItem
set_PurchaseUnit(String)	PX.Objects.IN	InventoryItem
get_DecimalBaseUnit()	PX.Objects.IN	InventoryItem
set_DecimalBaseUnit(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_DecimalSalesUnit()	PX.Objects.IN	InventoryItem
set_DecimalSalesUnit(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_DecimalPurchaseUnit()	PX.Objects.IN	InventoryItem
set_DecimalPurchaseUnit(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_Commissionable()	PX.Objects.IN	InventoryItem
set_Commissionable(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_ReasonCodeSubID()	PX.Objects.IN	InventoryItem
set_ReasonCodeSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_SalesAcctID()	PX.Objects.IN	InventoryItem
set_SalesAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_SalesSubID()	PX.Objects.IN	InventoryItem
set_SalesSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_InvAcctID()	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
set_InvAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_InvSubID()	PX.Objects.IN	InventoryItem
set_InvSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_COGSAcctID()	PX.Objects.IN	InventoryItem
set_COGSAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_COGSSubID()	PX.Objects.IN	InventoryItem
set_COGSSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_StdCstRevAcctID()	PX.Objects.IN	InventoryItem
set_StdCstRevAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_StdCstRevSubID()	PX.Objects.IN	InventoryItem
set_StdCstRevSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_StdCstVarAcctID()	PX.Objects.IN	InventoryItem
set_StdCstVarAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_StdCstVarSubID()	PX.Objects.IN	InventoryItem
set_StdCstVarSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_PPVAcctID()	PX.Objects.IN	InventoryItem
set_PPVAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_PPVSubID()	PX.Objects.IN	InventoryItem
set_PPVSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
get_POAccrualAcctID()	PX.Objects.IN	InventoryItem
set_POAccrualAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_POAccrualSubID()	PX.Objects.IN	InventoryItem
set_POAccrualSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_LCVarianceAcctID()	PX.Objects.IN	InventoryItem
set_LCVarianceAcctID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_LCVarianceSubID()	PX.Objects.IN	InventoryItem
set_LCVarianceSubID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_LastSiteID()	PX.Objects.IN	InventoryItem
set_LastSiteID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_LastStdCost()	PX.Objects.IN	InventoryItem
set_LastStdCost(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_PendingStdCost()	PX.Objects.IN	InventoryItem
set_PendingStdCost(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_PendingStdCostDate()	PX.Objects.IN	InventoryItem
set_PendingStdCostDate(Nullable<DateTime>)	PX.Objects.IN	InventoryItem
get_StdCost()	PX.Objects.IN	InventoryItem
set_StdCost(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_StdCostDate()	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
set_StdCostDate(Nullable<DateTime>)	PX.Objects.IN	InventoryItem
get_BasePrice()	PX.Objects.IN	InventoryItem
set_BasePrice(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_BaseWeight()	PX.Objects.IN	InventoryItem
set_BaseWeight(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_BaseVolume()	PX.Objects.IN	InventoryItem
set_BaseVolume(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_BaseItemWeight()	PX.Objects.IN	InventoryItem
set_BaseItemWeight(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_BaseItemVolume()	PX.Objects.IN	InventoryItem
set_BaseItemVolume(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_WeightUOM()	PX.Objects.IN	InventoryItem
set_WeightUOM(String)	PX.Objects.IN	InventoryItem
get_VolumeUOM()	PX.Objects.IN	InventoryItem
set_VolumeUOM(String)	PX.Objects.IN	InventoryItem
get_PackSeparately()	PX.Objects.IN	InventoryItem
set_PackSeparately(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_PackageOption()	PX.Objects.IN	InventoryItem
set_PackageOption(String)	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
get_PREFERREDVendorID()	PX.Objects.IN	InventoryItem
set_PREFERREDVendorID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_PREFERREDVendorLocationID()	PX.Objects.IN	InventoryItem
set_PREFERREDVendorLocationID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_DefaultSubItemID()	PX.Objects.IN	InventoryItem
set_DefaultSubItemID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_DefaultSubItemOnEntry()	PX.Objects.IN	InventoryItem
set_DefaultSubItemOnEntry(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_DfltSiteID()	PX.Objects.IN	InventoryItem
set_DfltSiteID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_DfltShipLocationID()	PX.Objects.IN	InventoryItem
set_DfltShipLocationID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_DfltReceiptLocationID()	PX.Objects.IN	InventoryItem
set_DfltReceiptLocationID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_ProductWorkgroupID()	PX.Objects.IN	InventoryItem
set_ProductWorkgroupID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_ProductManagerID()	PX.Objects.IN	InventoryItem
set_ProductManagerID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_PriceWorkgroupID()	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
set_PriceWorkgroupID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_PriceManagerID()	PX.Objects.IN	InventoryItem
set_PriceManagerID(Nullable<Int32>)	PX.Objects.IN	InventoryItem
get_NegQty()	PX.Objects.IN	InventoryItem
set_NegQty(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_LotSerClassID()	PX.Objects.IN	InventoryItem
set_LotSerClassID(String)	PX.Objects.IN	InventoryItem
get_LotSerNumberResult()	PX.Objects.IN	InventoryItem
set_LotSerNumberResult(String)	PX.Objects.IN	InventoryItem
get_PostClassID()	PX.Objects.IN	InventoryItem
set_PostClassID(String)	PX.Objects.IN	InventoryItem
get_DeferredCode()	PX.Objects.IN	InventoryItem
set_DeferredCode(String)	PX.Objects.IN	InventoryItem
get_DefaultTerm()	PX.Objects.IN	InventoryItem
set_DefaultTerm(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_DefaultTermUOM()	PX.Objects.IN	InventoryItem
set_DefaultTermUOM(String)	PX.Objects.IN	InventoryItem
get_PriceClassID()	PX.Objects.IN	InventoryItem
set_PriceClassID(String)	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
get_IsSplitted()	PX.Objects.IN	InventoryItem
set_IsSplitted(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_UseParentSubID()	PX.Objects.IN	InventoryItem
set_UseParentSubID(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_TotalPercentage()	PX.Objects.IN	InventoryItem
set_TotalPercentage(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_KitItem()	PX.Objects.IN	InventoryItem
set_KitItem(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_MinGrossProfitPct()	PX.Objects.IN	InventoryItem
set_MinGrossProfitPct(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_NonStockReceipt()	PX.Objects.IN	InventoryItem
set_NonStockReceipt(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_NonStockShip()	PX.Objects.IN	InventoryItem
set_NonStockShip(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_AccrueCost()	PX.Objects.IN	InventoryItem
set_AccrueCost(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_CostBasis()	PX.Objects.IN	InventoryItem
set_CostBasis(String)	PX.Objects.IN	InventoryItem
get_PercentOfSalesPrice()	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
set_PercentOfSalesPrice(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_CompletePOLine()	PX.Objects.IN	InventoryItem
set_CompletePOLine(String)	PX.Objects.IN	InventoryItem
get_ABCCodeID()	PX.Objects.IN	InventoryItem
set_ABCCodeID(String)	PX.Objects.IN	InventoryItem
get_ABCCodelsFixed()	PX.Objects.IN	InventoryItem
set_ABCCodelsFixed(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_MovementClassID()	PX.Objects.IN	InventoryItem
set_MovementClassID(String)	PX.Objects.IN	InventoryItem
get_MovementClassesFixed()	PX.Objects.IN	InventoryItem
set_MovementClassesFixed(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_MarkupPct()	PX.Objects.IN	InventoryItem
set_MarkupPct(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_RecPrice()	PX.Objects.IN	InventoryItem
set_RecPrice(Nullable<Decimal>)	PX.Objects.IN	InventoryItem
get_ImageUrl()	PX.Objects.IN	InventoryItem
set_ImageUrl(String)	PX.Objects.IN	InventoryItem
get_NoteID()	PX.Objects.IN	InventoryItem
set_NoteID(Nullable<Guid>)	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
get_CreatedByID()	PX.Objects.IN	InventoryItem
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	InventoryItem
get_CreatedByScreenID()	PX.Objects.IN	InventoryItem
set_CreatedByScreenID(String)	PX.Objects.IN	InventoryItem
get_CreatedDateTime()	PX.Objects.IN	InventoryItem
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	InventoryItem
get_LastModifiedByID()	PX.Objects.IN	InventoryItem
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	InventoryItem
get_LastModifiedByScreenID()	PX.Objects.IN	InventoryItem
set_LastModifiedByScreenID(String)	PX.Objects.IN	InventoryItem
get_LastModifiedDateTime()	PX.Objects.IN	InventoryItem
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	InventoryItem
get_GroupMask()	PX.Objects.IN	InventoryItem
set_GroupMask(Byte[])	PX.Objects.IN	InventoryItem
get_CycleID()	PX.Objects.IN	InventoryItem
set_CycleID(String)	PX.Objects.IN	InventoryItem
get_tstamp()	PX.Objects.IN	InventoryItem
set_tstamp(Byte[])	PX.Objects.IN	InventoryItem
get_Included()	PX.Objects.IN	InventoryItem

Method	Namespace	Parent Class
set_Included(Nullable<Boolean>)	PX.Objects.IN	InventoryItem
get_Body()	PX.Objects.IN	InventoryItem
set_Body(String)	PX.Objects.IN	InventoryItem
ViewBatch(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
Release(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
Report(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
INEdit(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
INRegisterDetails(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
InventorySummary(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
AddInvBySite(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
AddInvSelBySite(PXAdapter)	PX.Objects.IN	INAdjustmentEntry
get_licenseLimits()	PX.Objects.IN	INAdjustmentEntry
set__licenseLimits(ILicenseLimitsService)	PX.Objects.IN	INAdjustmentEntry
UpdateINRegisterReleased(INRegister)	PX.Objects.IN	INReleaseProcess
ViewBatch(PXAdapter)	PX.Objects.IN	INIssueEntry
Release(PXAdapter)	PX.Objects.IN	INIssueEntry
Report(PXAdapter)	PX.Objects.IN	INIssueEntry
INEdit(PXAdapter)	PX.Objects.IN	INIssueEntry
InventorySummary(PXAdapter)	PX.Objects.IN	INIssueEntry

Method	Namespace	Parent Class
INRegisterDetails(PXAdapter)	PX.Objects.IN	INIssueEntry
AddInvBySite(PXAdapter)	PX.Objects.IN	INIssueEntry
AddInvSelBySite(PXAdapter)	PX.Objects.IN	INIssueEntry
get_licenseLimits()	PX.Objects.IN	INIssueEntry
set__licenseLimits(ILicenseLimitsService)	PX.Objects.IN	INIssueEntry
get_PIID()	PX.Objects.IN	PIInvSiteLoc
set_PIID(String)	PX.Objects.IN	PIInvSiteLoc
get_InventoryID()	PX.Objects.IN	PIInvSiteLoc
set_InventoryID(Nullable<Int32>)	PX.Objects.IN	PIInvSiteLoc
get_SiteID()	PX.Objects.IN	PIInvSiteLoc
set_SiteID(Nullable<Int32>)	PX.Objects.IN	PIInvSiteLoc
get_LocationID()	PX.Objects.IN	PIInvSiteLoc
set_LocationID(Nullable<Int32>)	PX.Objects.IN	PIInvSiteLoc
ViewBatch(PXAdapter)	PX.Objects.IN	INReceiptEntry
Release(PXAdapter)	PX.Objects.IN	INReceiptEntry
Report(PXAdapter)	PX.Objects.IN	INReceiptEntry
INEdit(PXAdapter)	PX.Objects.IN	INReceiptEntry
INRegisterDetails(PXAdapter)	PX.Objects.IN	INReceiptEntry
AddInvBySite(PXAdapter)	PX.Objects.IN	INReceiptEntry

Method	Namespace	Parent Class
AddInvSelBySite(PXAdapter)	PX.Objects.IN	INReceiptEntry
get licenseLimits()	PX.Objects.IN	INReceiptEntry
set__licenseLimits(ILicenseLimitsService)	PX.Objects.IN	INReceiptEntry
INTranBaseQtyFieldVerifying(PXCache,INTran,Object)	PX.Objects.IN	INReceiptEntry
INTranSplitBaseQtyFieldVerifying(PXCache,INTran,Object)	PX.Objects.IN	INReceiptEntry
INLocationLabels(PXAdapter)	PX.Objects.IN	INSiteMaint
Action(PXAdapter)	PX.Objects.IN	INSiteMaint
Report(PXAdapter)	PX.Objects.IN	INSiteMaint
ViewBatch(PXAdapter)	PX.Objects.IN	INTransferEntry
Release(PXAdapter)	PX.Objects.IN	INTransferEntry
Report(PXAdapter)	PX.Objects.IN	INTransferEntry
INEdit(PXAdapter)	PX.Objects.IN	INTransferEntry
INRegisterDetails(PXAdapter)	PX.Objects.IN	INTransferEntry
InventorySummary(PXAdapter)	PX.Objects.IN	INTransferEntry
AddInvBySite(PXAdapter)	PX.Objects.IN	INTransferEntry
AddInvSelBySite(PXAdapter)	PX.Objects.IN	INTransferEntry
get licenseLimits()	PX.Objects.IN	INTransferEntry
set__licenseLimits(ILicenseLimitsService)	PX.Objects.IN	INTransferEntry
Redirect(Nullable<Int32>,String,String,Nullable<Int32>,Nullable<Int32>)	PX.Objects.IN	InventoryAllocDetEnq

Method	Namespace	Parent Class
Cancel(PXAdapter)	PX.Objects.IN	InventoryItemMaintBase
get_BranchID()	PX.Objects.IN	INOverheadTran
set_BranchID(Nullable<Int32>)	PX.Objects.IN	INOverheadTran
get_DocType()	PX.Objects.IN	INOverheadTran
set_DocType(String)	PX.Objects.IN	INOverheadTran
get_TranType()	PX.Objects.IN	INOverheadTran
set_TranType(String)	PX.Objects.IN	INOverheadTran
get_RefNbr()	PX.Objects.IN	INOverheadTran
set_RefNbr(String)	PX.Objects.IN	INOverheadTran
get_LineNbr()	PX.Objects.IN	INOverheadTran
set_LineNbr(Nullable<Int32>)	PX.Objects.IN	INOverheadTran
get_AssyType()	PX.Objects.IN	INOverheadTran
set_AssyType(String)	PX.Objects.IN	INOverheadTran
get_ProjectID()	PX.Objects.IN	INOverheadTran
set_ProjectID(Nullable<Int32>)	PX.Objects.IN	INOverheadTran
get_TranDate()	PX.Objects.IN	INOverheadTran
set_TranDate(Nullable<DateTime>)	PX.Objects.IN	INOverheadTran
get_InventoryID()	PX.Objects.IN	INOverheadTran
set_InventoryID(Nullable<Int32>)	PX.Objects.IN	INOverheadTran

Method	Namespace	Parent Class
get_SubItemID()	PX.Objects.IN	INOverheadTran
set_SubItemID(Nullable<Int32>)	PX.Objects.IN	INOverheadTran
get_SiteID()	PX.Objects.IN	INOverheadTran
set_SiteID(Nullable<Int32>)	PX.Objects.IN	INOverheadTran
get_LocationID()	PX.Objects.IN	INOverheadTran
set_LocationID(Nullable<Int32>)	PX.Objects.IN	INOverheadTran
get_InvtMult()	PX.Objects.IN	INOverheadTran
set_InvtMult(Nullable<Int16>)	PX.Objects.IN	INOverheadTran
get_UOM()	PX.Objects.IN	INOverheadTran
set_UOM(String)	PX.Objects.IN	INOverheadTran
get_Qty()	PX.Objects.IN	INOverheadTran
set_Qty(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_FinPeriodID()	PX.Objects.IN	INOverheadTran
set_FinPeriodID(String)	PX.Objects.IN	INOverheadTran
get_TranDesc()	PX.Objects.IN	INOverheadTran
set_TranDesc(String)	PX.Objects.IN	INOverheadTran
get_ReasonCode()	PX.Objects.IN	INOverheadTran
set_ReasonCode(String)	PX.Objects.IN	INOverheadTran
get_BaseQty()	PX.Objects.IN	INOverheadTran

Method	Namespace	Parent Class
set_BaseQty(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_UnassignedQty()	PX.Objects.IN	INOverheadTran
set_UnassignedQty(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_Released()	PX.Objects.IN	INOverheadTran
set_Released(Nullable<Boolean>)	PX.Objects.IN	INOverheadTran
get_TranPeriodID()	PX.Objects.IN	INOverheadTran
set_TranPeriodID(String)	PX.Objects.IN	INOverheadTran
get_UnitPrice()	PX.Objects.IN	INOverheadTran
set_UnitPrice(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_TranAmt()	PX.Objects.IN	INOverheadTran
set_TranAmt(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_UnitCost()	PX.Objects.IN	INOverheadTran
set_UnitCost(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_TranCost()	PX.Objects.IN	INOverheadTran
set_TranCost(Nullable<Decimal>)	PX.Objects.IN	INOverheadTran
get_UpdateShippedNotInvoiced()	PX.Objects.IN	INOverheadTran
set_UpdateShippedNotInvoiced(Nullable<Boolean>)	PX.Objects.IN	INOverheadTran
get_CreatedByID()	PX.Objects.IN	INOverheadTran
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INOverheadTran

Method	Namespace	Parent Class
get_CreatedByScreenID()	PX.Objects.IN	INOverheadTran
set_CreatedByScreenID(String)	PX.Objects.IN	INOverheadTran
get_CreatedDateTime()	PX.Objects.IN	INOverheadTran
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INOverheadTran
get_LastModifiedByID()	PX.Objects.IN	INOverheadTran
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INOverheadTran
get_LastModifiedByScreenID()	PX.Objects.IN	INOverheadTran
set_LastModifiedByScreenID(String)	PX.Objects.IN	INOverheadTran
get_LastModifiedDateTime()	PX.Objects.IN	INOverheadTran
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INOverheadTran
get_Tstamp()	PX.Objects.IN	INOverheadTran
set_Tstamp(Byte[])	PX.Objects.IN	INOverheadTran
get_Selected()	PX.Objects.IN	INKitTranSplit
set_Selected(Nullable<Boolean>)	PX.Objects.IN	INKitTranSplit
get_DocType()	PX.Objects.IN	INKitTranSplit
set_DocType(String)	PX.Objects.IN	INKitTranSplit
get_TranType()	PX.Objects.IN	INKitTranSplit
set_TranType(String)	PX.Objects.IN	INKitTranSplit
get_RefNbr()	PX.Objects.IN	INKitTranSplit

Method	Namespace	Parent Class
set_RefNbr(String)	PX.Objects.IN	INKitTranSplit
get_LineNbr()	PX.Objects.IN	INKitTranSplit
set_LineNbr(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_SplitLineNbr()	PX.Objects.IN	INKitTranSplit
set_SplitLineNbr(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_TrnDate()	PX.Objects.IN	INKitTranSplit
set_TrnDate(Nullable<DateTime>)	PX.Objects.IN	INKitTranSplit
get_InvtMult()	PX.Objects.IN	INKitTranSplit
set_InvtMult(Nullable<Int16>)	PX.Objects.IN	INKitTranSplit
get_InventoryID()	PX.Objects.IN	INKitTranSplit
set_InventoryID(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_SubItemID()	PX.Objects.IN	INKitTranSplit
set_SubItemID(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_SiteID()	PX.Objects.IN	INKitTranSplit
set_SiteID(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_LocationID()	PX.Objects.IN	INKitTranSplit
set_LocationID(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_LotSerialNbr()	PX.Objects.IN	INKitTranSplit
set_LotSerialNbr(String)	PX.Objects.IN	INKitTranSplit

Method	Namespace	Parent Class
get_LotSerClassID()	PX.Objects.IN	INKitTranSplit
set_LotSerClassID(String)	PX.Objects.IN	INKitTranSplit
get_AssignedNbr()	PX.Objects.IN	INKitTranSplit
set_AssignedNbr(String)	PX.Objects.IN	INKitTranSplit
get_ExpireDate()	PX.Objects.IN	INKitTranSplit
set_ExpireDate(Nullable<DateTime>)	PX.Objects.IN	INKitTranSplit
get_Released()	PX.Objects.IN	INKitTranSplit
set_Released(Nullable<Boolean>)	PX.Objects.IN	INKitTranSplit
get_UOM()	PX.Objects.IN	INKitTranSplit
set_UOM(String)	PX.Objects.IN	INKitTranSplit
get_Qty()	PX.Objects.IN	INKitTranSplit
set_Qty(Nullable<Decimal>)	PX.Objects.IN	INKitTranSplit
get_BaseQty()	PX.Objects.IN	INKitTranSplit
set_BaseQty(Nullable<Decimal>)	PX.Objects.IN	INKitTranSplit
get_PlanID()	PX.Objects.IN	INKitTranSplit
set_PlanID(Nullable<Int64>)	PX.Objects.IN	INKitTranSplit
get_ProjectID()	PX.Objects.IN	INKitTranSplit
set_ProjectID(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_TaskID()	PX.Objects.IN	INKitTranSplit

Method	Namespace	Parent Class
set_TaskID(Nullable<Int32>)	PX.Objects.IN	INKitTranSplit
get_CreatedByID()	PX.Objects.IN	INKitTranSplit
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INKitTranSplit
get_CreatedByScreenID()	PX.Objects.IN	INKitTranSplit
set_CreatedByScreenID(String)	PX.Objects.IN	INKitTranSplit
get_CreatedDateTime()	PX.Objects.IN	INKitTranSplit
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INKitTranSplit
get_LastModifiedByID()	PX.Objects.IN	INKitTranSplit
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INKitTranSplit
get_LastModifiedByScreenID()	PX.Objects.IN	INKitTranSplit
set_LastModifiedByScreenID(String)	PX.Objects.IN	INKitTranSplit
get_LastModifiedDateTime()	PX.Objects.IN	INKitTranSplit
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INKitTranSplit
get_tstamp()	PX.Objects.IN	INKitTranSplit
set_tstamp(Byte[])	PX.Objects.IN	INKitTranSplit
get_BranchID()	PX.Objects.IN	INKitRegister
set_BranchID(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_DocType()	PX.Objects.IN	INKitRegister
set_DocType(String)	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
get_RefNbr()	PX.Objects.IN	INKitRegister
set_RefNbr(String)	PX.Objects.IN	INKitRegister
get_OrigModule()	PX.Objects.IN	INKitRegister
set_OrigModule(String)	PX.Objects.IN	INKitRegister
get_TranDesc()	PX.Objects.IN	INKitRegister
set_TranDesc(String)	PX.Objects.IN	INKitRegister
get_Released()	PX.Objects.IN	INKitRegister
set_Released(Nullable<Boolean>)	PX.Objects.IN	INKitRegister
get_Hold()	PX.Objects.IN	INKitRegister
set_Hold(Nullable<Boolean>)	PX.Objects.IN	INKitRegister
get_Status()	PX.Objects.IN	INKitRegister
set_Status(String)	PX.Objects.IN	INKitRegister
get_TranDate()	PX.Objects.IN	INKitRegister
set_TranDate(Nullable<DateTime>)	PX.Objects.IN	INKitRegister
get_TransferType()	PX.Objects.IN	INKitRegister
set_TransferType(String)	PX.Objects.IN	INKitRegister
get_FinPeriodID()	PX.Objects.IN	INKitRegister
set_FinPeriodID(String)	PX.Objects.IN	INKitRegister
get_TranPeriodID()	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
set_TrnPeriodID(String)	PX.Objects.IN	INKitRegister
get_LineCntr()	PX.Objects.IN	INKitRegister
set_LineCntr(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_TotalQty()	PX.Objects.IN	INKitRegister
set_TotalQty(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_TotalAmount()	PX.Objects.IN	INKitRegister
set_TotalAmount(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_TotalCost()	PX.Objects.IN	INKitRegister
set_TotalCost(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_ControlQty()	PX.Objects.IN	INKitRegister
set_ControlQty(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_ControlAmount()	PX.Objects.IN	INKitRegister
set_ControlAmount(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_ControlCost()	PX.Objects.IN	INKitRegister
set_ControlCost(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_KitInventoryID()	PX.Objects.IN	INKitRegister
set_KitInventoryID(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_KitRevisionID()	PX.Objects.IN	INKitRegister
set_KitRevisionID(String)	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
get_KitLineNbr()	PX.Objects.IN	INKitRegister
set_KitLineNbr(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_BatchNbr()	PX.Objects.IN	INKitRegister
set_BatchNbr(String)	PX.Objects.IN	INKitRegister
get_LotSerTrack()	PX.Objects.IN	INKitRegister
set_LotSerTrack(String)	PX.Objects.IN	INKitRegister
get_CreatedByID()	PX.Objects.IN	INKitRegister
set_CreatedByID(Nullable<Guid>)	PX.Objects.IN	INKitRegister
get_CreatedByScreenID()	PX.Objects.IN	INKitRegister
set_CreatedByScreenID(String)	PX.Objects.IN	INKitRegister
get_CreatedDateTime()	PX.Objects.IN	INKitRegister
set_CreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INKitRegister
get_LastModifiedByID()	PX.Objects.IN	INKitRegister
set_LastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INKitRegister
get_LastModifiedByScreenID()	PX.Objects.IN	INKitRegister
set_LastModifiedByScreenID(String)	PX.Objects.IN	INKitRegister
get_LastModifiedDateTime()	PX.Objects.IN	INKitRegister
set_LastModifiedDateTime(Nullable<DateTime>)	PX.Objects.IN	INKitRegister
get_NoteID()	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
set_NoteID(Nullable<Guid>)	PX.Objects.IN	INKitRegister
get_tstamp()	PX.Objects.IN	INKitRegister
set_tstamp(Byte[])	PX.Objects.IN	INKitRegister
get_TranType()	PX.Objects.IN	INKitRegister
set_TranType(String)	PX.Objects.IN	INKitRegister
get_AssyType()	PX.Objects.IN	INKitRegister
set_AssyType(String)	PX.Objects.IN	INKitRegister
get_ProjectID()	PX.Objects.IN	INKitRegister
set_ProjectID(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_TaskID()	PX.Objects.IN	INKitRegister
set_TaskID(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_InvtMult()	PX.Objects.IN	INKitRegister
set_InvtMult(Nullable<Int16>)	PX.Objects.IN	INKitRegister
get_SubItemID()	PX.Objects.IN	INKitRegister
set_SubItemID(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_SiteID()	PX.Objects.IN	INKitRegister
set_SiteID(Nullable<Int32>)	PX.Objects.IN	INKitRegister
get_LocationID()	PX.Objects.IN	INKitRegister
set_LocationID(Nullable<Int32>)	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
get_UOM()	PX.Objects.IN	INKitRegister
set_UOM(String)	PX.Objects.IN	INKitRegister
get_Qty()	PX.Objects.IN	INKitRegister
set_Qty(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_BaseQty()	PX.Objects.IN	INKitRegister
set_BaseQty(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_UnassignedQty()	PX.Objects.IN	INKitRegister
set_UnassignedQty(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_TranReleased()	PX.Objects.IN	INKitRegister
set_TranReleased(Nullable<Boolean>)	PX.Objects.IN	INKitRegister
get_UnitPrice()	PX.Objects.IN	INKitRegister
set_UnitPrice(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_TranAmt()	PX.Objects.IN	INKitRegister
set_TranAmt(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_UnitCost()	PX.Objects.IN	INKitRegister
set_UnitCost(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_TranCost()	PX.Objects.IN	INKitRegister
set_TranCost(Nullable<Decimal>)	PX.Objects.IN	INKitRegister
get_TranTranDesc()	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
set_TransTranDesc(String)	PX.Objects.IN	INKitRegister
get_ReasonCode()	PX.Objects.IN	INKitRegister
set_ReasonCode(String)	PX.Objects.IN	INKitRegister
get_LotSerialNbr()	PX.Objects.IN	INKitRegister
set_LotSerialNbr(String)	PX.Objects.IN	INKitRegister
get_ExpireDate()	PX.Objects.IN	INKitRegister
set_ExpireDate(Nullable<DateTime>)	PX.Objects.IN	INKitRegister
get_UpdateShippedNotInvoiced()	PX.Objects.IN	INKitRegister
set_UpdateShippedNotInvoiced(Nullable<Boolean>)	PX.Objects.IN	INKitRegister
get_HasMixedProjectTasks()	PX.Objects.IN	INKitRegister
set_HasMixedProjectTasks(Nullable<Boolean>)	PX.Objects.IN	INKitRegister
get_TransCreatedByID()	PX.Objects.IN	INKitRegister
set_TransCreatedByID(Nullable<Guid>)	PX.Objects.IN	INKitRegister
get_TransCreatedByScreenID()	PX.Objects.IN	INKitRegister
set_TransCreatedByScreenID(String)	PX.Objects.IN	INKitRegister
get_TransCreatedDateTime()	PX.Objects.IN	INKitRegister
set_TransCreatedDateTime(Nullable<DateTime>)	PX.Objects.IN	INKitRegister
get_TransLastModifiedByID()	PX.Objects.IN	INKitRegister
set_TransLastModifiedByID(Nullable<Guid>)	PX.Objects.IN	INKitRegister

Method	Namespace	Parent Class
get_TransLastModifiedByScreenID()	PX.Objects.IN	INKitRegister
set_TransLastModifiedByScreenID(String)	PX.Objects.IN	INKitRegister
get_TransLastModifiedDate()	PX.Objects.IN	INKitRegister
set_TransLastModifiedDate(Nullable<DateTime>)	PX.Objects.IN	INKitRegister
get_Transstamp()	PX.Objects.IN	INKitRegister
set_Transstamp(Byte[])	PX.Objects.IN	INKitRegister
SetStatus()	PX.Objects.IN	INKitRegister
get_KitInventoryID()	PX.Objects.IN	INKitSpecHdrDistinct
set_KitInventoryID(Nullable<Int32>)	PX.Objects.IN	INKitSpecHdrDistinct
Action(PXAdapter,Nullable<Int32>)	PX.Objects.IN	NonStockItemMaint
Inquiry(PXAdapter,Nullable<Int32>)	PX.Objects.IN	NonStockItemMaint
Action(PXAdapter,Nullable<Int32>)	PX.Objects.IN	InventoryItemMaint
Inquiry(PXAdapter,Nullable<Int32>)	PX.Objects.IN	InventoryItemMaint
SyncWithDocumentCartLine(ScanHeader,ScanLine,INCartSplit,Nullable<Decimal>)	PX.Objects.IN.WMS	INScanRegisterCartsSupport<TSelf,TWMSSystem,TWMSHeader,TGraph>
AssignRestInventoryFields(InventoryItemMaintBase,InventoryItem,InventoryItem)	PX.Objects.IN.Matrix.Utility	CreateMatrixItemsHelper
AssignInventoryAttributes(InventoryItemMaintBase,MatrixInventoryItem,Dictionary<String,String>)	PX.Objects.IN.Matrix.Utility	CreateMatrixItemsHelper
GenerationRuleRowInserted(PXCache,INMatrixGenerationRule)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint

Method	Namespace	Parent Class
idRowUp(PXAdapter)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
idRowDown(PXAdapter)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
descriptionRowUp(PXAdapter)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
descriptionRowDown(PXAdapter)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
MoveCurrentRow(PXCache, IEnumerable<INMatrixGenerationRule>, Boolean)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GenerationRuleRowSelected(PXCache, INMatrixGenerationRule)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GenerationRuleSegmentUpdated(PXCache, INMatrixGenerationRule)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GenerationRuleAttributeUpdated(PXCache, INMatrixGenerationRule)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GenerationRuleConstantUpdated(PXCache, INMatrixGenerationRule)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GenerationRuleNumberingUpdated(PXCache, INMatrixGenerationRule)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
ResetValue<Field>()	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GetGenerationRuleSample<Field, Rule>(PXSelectBase<Rule>, String)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
GetGenerationRuleSample(IEnumerable<INMatrixGenerationRule>)	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint

Method	Namespace	Parent Class
SetTranslations<TSourceField,TDestinationField>(PXCACHE,OBJECT,PXCACHE,OBJECT,Func<String,String>)	PX.Objects.IN.Matrix.Attributes	DBMatrixLocalizableDescriptionAttribute
CreateInventoryMapValue(Nullable<Int32>,PXResult<CSAnswers,CSAttributeGroup,InventoryItem>)	PX.Objects.IN.Matrix.GraphExtensions	MatrixGridExt<Graph,MainItemType>
get_TemplateID()	PX.Objects.IN.Matrix.DAC	INMatrixGenerationRule
set_TemplateID(Nullable<Int32>)	PX.Objects.IN.Matrix.DAC	INMatrixGenerationRule
Find(PXGraph,Nullable<Int32>,String,Nullable<Int32>)	PX.Objects.IN.Matrix.DAC	INMatrixGenerationRule+PK
Find(PXGraph,Nullable<Int32>,String,Nullable<Int32>)	PX.Objects.IN.Matrix.DAC.Projections	DescriptionGenerationRule+PK
Find(PXGraph,Nullable<Int32>,String,Nullable<Int32>)	PX.Objects.IN.Matrix.DAC.Projections	IDGenerationRule+PK
RequireTransferDepreciation(FixedAsset,AssetProcess+FAAccounts,AssetProcess+FAAccounts)	PX.Objects.FA	AssetProcess
InsertTransferAssetTransaction(PXCACHE,FAResult,FABookBalance,FixedAsset,FALocationHistory,AssetProcess+FAAccounts,AssetProcess+FAAccounts)	PX.Objects.FA	AssetProcess
set_Hold(Nullable<Boolean>)	PX.Objects.FA	FADetails
Action(PXAdapter,String)	PX.Objects.CT	ContractMaint
Inquiry(PXAdapter,String)	PX.Objects.CT	ContractMaint

Method	Namespace	Parent Class
UpdateReferencePMTTran2ARTran(CTBillEngine+ARContractInvoiceEntry, Dictionary<Int32,List<TranNotePair>>,List<UsageData>)	PX.Objects.CT	CTBillEngine
get_DefaultAccountID()	PX.Objects.CT	Contract
set_DefaultAccountID(Nullable<Int32>)	PX.Objects.CT	Contract
get_DefaultSubID()	PX.Objects.CT	Contract
set_DefaultSubID(Nullable<Int32>)	PX.Objects.CT	Contract
GetCCPaymentEntry()	PX.Objects.Extensio ns.PaymentTransac tion	PaymentTransactionGraph<TGraph,TPrimary>
SetSuccessfulSyncStatus(IExternalTransaction)	PX.Objects.Extensio ns.PaymentTransac tion	PaymentTransactionGraph<TGraph,TPrimary>
DeactivateNotFoundTran(TPrimary,IExternalTransaction)	PX.Objects.Extensio ns.PaymentTransac tion	PaymentTransactionGraph<TGraph,TPrimary>
DeactivateAndUpdateProcStatus(ExternalTransaction)	PX.Objects.Extensio ns.PaymentTransac tion	PaymentTransactionGraph<TGraph,TPrimary>
UpdateSyncStatus(ExternalTransaction,SyncStatus,String)	PX.Objects.Extensio ns.PaymentTransac tion	PaymentTransactionGraph<TGraph,TPrimar y>
CreateNewGraph()	PX.Objects.Extensio ns.PaymentTransac tion	PaymentTransactionGraph<TGraph,TPrimar y>
Action(PXAdapter)	PX.Objects.EP	EquipmentTimeCardMaint
Submit()	PX.Objects.EP	EquipmentTimeCardMaint

Method	Namespace	Parent Class
Edit()	PX.Objects.EP	EquipmentTimeCardMaint
Action(PXAdapter)	PX.Objects.EP	ExpenseClaimDetailEntry
MakeSubAccountByMaskForReceipt<SubMaskField,CompanySubField,EmployeeSubField,ItemSubField>(PXCACHE,EExpenseClaimDetails,String)	PX.Objects.EP	ExpenseClaimDetailGraphExtBase<TGraph>
Action(PXAdapter)	PX.Objects.EP	ExpenseClaimEntry
Edit()	PX.Objects.EP	ExpenseClaimEntry
Action(PXAdapter)	PX.Objects.EP	TimeCardMaint
Approve(PXAdapter)	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
Reject(PXAdapter)	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
Action(PXAdapter)	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
Report(PXAdapter)	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
InitializeActionsMenu()	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
InitializeReportsMenu()	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
InitializeActionsMenu(Action)	PX.Objects.CN.ProjectAccounting.PM.GraphExtensions	ProformaEntryExt
InitializeInquiriesMenu(Action)	PX.Objects.CN.ProjectAccounting.PM.GraphExtensions	ProjectEntryExt

Method	Namespace	Parent Class
SetStatus()	PX.Objects.GL	Batch
get_BaseCuryID()	PX.Objects.GL	Branch
set_BaseCuryID(String)	PX.Objects.GL	Branch
SetStatus()	PX.Objects.GL	GLDocBatch
get_RoundingLimit()	PX.Objects.GL	GLSetup
set_RoundingLimit(Nullable<Decimal>)	PX.Objects.GL	GLSetup
set_Status(Nullable<Int32>)	PX.Objects.GL	GLTrialBalanceImportMap
BatchRegisterDetails(PXAdapter)	PX.Objects.GL	JournalEntry
GLEditDetails(PXAdapter)	PX.Objects.GL	JournalEntry
GLReversingBatches(PXAdapter)	PX.Objects.GL	JournalEntry
release(PXAdapter)	PX.Objects.CA	CABatchEntry
export(PXAdapter)	PX.Objects.CA	CABatchEntry
Copy(CADepositDetail,ARPayment)	PX.Objects.CA	CADepositEntry
Copy(CADepositDetail,APPayment)	PX.Objects.CA	CADepositEntry
IsKeyEqual(ARPayment,CADepositDetail)	PX.Objects.CA	CADepositEntry
ReportsMenu(PXAdapter)	PX.Objects.CA	CAReconEntry
PrintReconciliationReport(PXAdapter)	PX.Objects.CA	CAReconEntry
Skip(CATran,CATran,Boolean)	PX.Objects.CA	CAReconEntry
get_RoundingLimit()	PX.Objects.CA	CAReleaseProcess

Method	Namespace	Parent Class
ReleaseDocProc<TCADocument>(JournalEntry,List<Batch>&,TCADocume nt)	PX.Objects.CA	CAReleaseProcess
Hold(PXAdapter)	PX.Objects.CA	CATranEntry
Flow(PXAdapter)	PX.Objects.CA	CATranEntry
Action(PXAdapter,Nullable<Int32>,Boolean,String)	PX.Objects.CA	CATranEntry
Inquiry(PXAdapter,Nullable<Int32>)	PX.Objects.CA	CATranEntry
ReleaseDoc<TCADocument>(TCADocument,Int32,List<Batch>)	PX.Objects.CA	CATrxRelease
get_Status()	PX.Objects.CA	CADeposit
set_Status(String)	PX.Objects.CA	CADeposit
SetStatus()	PX.Objects.CA	CATransfer
Reverse(PXAdapter)	PX.Objects.CA	CATranEntryExt
Persist(Action)	PX.Objects.CR	BusinessAccountMaint+CRDuplicateEntitiesForBAccountGraphExt
get_Status()	PX.Objects.CR	BAccount
set_Status(String)	PX.Objects.CR	BAccount
get_ContactEmailUnique()	PX.Objects.CR	CRSetup
set_ContactEmailUnique(Nullable<Boolean>)	PX.Objects.CR	CRSetup
AddAction(String,String,PXButtonDelegate,Boolean)	PX.Objects.CR.Ext ensions	AddressLookupExtension<TGraph,TMaster,TAddress>
Persist(Action)	PX.Objects.CR.Ext ensions.CRDuplicate Entities	CRDuplicateContactEntities<TGraph,TMain>

Method	Namespace	Parent Class
duplicates()	PX.Objects.CR.Extensions.CRDuplicateEntities	CRDuplicateEntities<TGraph,TMain>
get_Status()	PX.Objects.AR	ARCustomerBalanceEnq+ARHistoryFilter
set_Status(String)	PX.Objects.AR	ARCustomerBalanceEnq+ARHistoryFilter
get_Action()	PX.Objects.AR	ARCustomerCreditHoldProcess+CreditHoldParameters
set_Action(Nullable<Int32>)	PX.Objects.AR	ARCustomerCreditHoldProcess+CreditHoldParameters
get_CustomerId()	PX.Objects.AR	ARCustomerCreditHoldProcess+DetailsResult
set_CustomerId(Nullable<Int32>)	PX.Objects.AR	ARCustomerCreditHoldProcess+DetailsResult
get_Status()	PX.Objects.AR	ARCustomerCreditHoldProcess+DetailsResult
Method	Namespace	Parent Class
set_Status(String)	PX.Objects.AR	ARCustomerCreditHoldProcess+DetailsResult
get_RoundingLimit()	PX.Objects.AR	ARReleaseProcess
Approve(PXAdapter)	PX.Objects.AR	ARInvoiceEntry
Reject(PXAdapter)	PX.Objects.AR	ARInvoiceEntry
CreditHold(PXAdapter)	PX.Objects.AR	ARInvoiceEntry
ValidateRecordedInfo(InputCCTransaction)	PX.Objects.AR	ARPaymentEntry+PaymentTransaction
CalculateCorrectedAmountForPendingPricesCalculation(CalculatePricesFilter,InventoryItem,INItemCost,INItemSite,ARPriceWorksheetDetail)	PX.Objects.AR	ARPriceWorksheetMaint
get_BranchID()	PX.Objects.AR	ARWriteOffFilter

Method	Namespace	Parent Class
set_BranchID(Nullable<Int32>)	PX.Objects.AR	ARWriteOffFilter
get_CommitmentID()	PX.Objects.AR	ARTran
set_CommitmentID(Nullable<Guid>)	PX.Objects.AR	ARTran
SyncCustomerCache(PXCache, Object)	PX.Objects.AR	RestrictBranchByCustomer
FindSalesPrice(PXCache, String, Nullable<Int32>, Nullable<Int32>, Nullable<Int32>, String, String, Nullable<Decimal>, String, DateTime, Boolean, ARSalesPriceMaintTemplateItemExtension+FindSalesPriceOrig)	PX.Objects.AR	ARSalesPriceMaintTemplateItemExtension
Invoke(PXCache, String, Nullable<Int32>, Nullable<Int32>, Nullable<Int32>, String, String, Nullable<Decimal>, String, DateTime, Boolean)	PX.Objects.AR	ARSalesPriceMaintTemplateItemExtension+FindSalesPriceOrig
BeginInvoke(PXCache, String, Nullable<Int32>, Nullable<Int32>, Nullable<Int32>, String, String, Nullable<Decimal>, String, DateTime, Boolean, AsyncCallback, Object)	PX.Objects.AR	ARSalesPriceMaintTemplateItemExtension+FindSalesPriceOrig
get_IsCCPayment()	PX.Objects.AR.Standalone	ARCashSale
set_IsCCPayment(Nullable<Boolean>)	PX.Objects.AR.Standalone	ARCashSale
FormatDescription(CCProcTranRepository, ExternalTransactionState)	PX.Objects.AR.CCPaymentProcessing.Helpers	ExternalTranHelper
get_RoundingLimit()	PX.Objects.AP	APReleaseProcess
Approve(PXAdapter)	PX.Objects.AP	APInvoiceEntry
Reject(PXAdapter)	PX.Objects.AP	APInvoiceEntry
CalculateCorrectedAmountForPendingPricesCalculation(CalculatePricesFilter, InventoryItem, INItemCost, APPriceWorksheetDetail)	PX.Objects.AP	APPriceWorksheetMaint

Method	Namespace	Parent Class
Action(PXAdapter,String)	PX.Objects.AP	APDataEntryGraph<TGraph,TPrimary>
Inquiry(PXAdapter,String)	PX.Objects.AP	APDataEntryGraph<TGraph,TPrimary>
get_Status()	PX.Objects.AP	APVendorBalanceEnq+APHistoryFilter
set_Status(String)	PX.Objects.AP	APVendorBalanceEnq+APHistoryFilter
get_AccountFieldType()	PX.Objects.AP	APActiveProjectAttribute
set_AccountFieldType(Type)	PX.Objects.AP	APActiveProjectAttribute
OpenBatch(PXAdapter)	PX.Objects.FS	AppointmentEntry
openINPostingDocument()	PX.Objects.FS	AppointmentEntry
openInvoiceDocument()	PX.Objects.FS	AppointmentEntry
EnableDisable_ActionButtons(PXCache,FSAppointment,FSServiceOrder,FSSrvOrdType,FSBillingCycle)	PX.Objects.FS	AppointmentEntry
EnableDisableDocumentByWorkflowStage(PXCache,FSWFStage)	PX.Objects.FS	AppointmentEntry
DisableAllDACFields(PXCache,Object,List<Type>)	PX.Objects.FS	AppointmentEntry
SetServiceOrderStatusFromAppointment(FSServiceOrder,FSAppointment)	PX.Objects.FS	AppointmentEntry
IsTheLastestActiveAppointmentInServicesOrder(FSServiceOrder,FSAppointment,Boolean)	PX.Objects.FS	AppointmentEntry
ShowAsk(PXView,String,String,MessageButtons)	PX.Objects.FS	AppointmentEntry
GetFinalServiceOrderStatus(FSServiceOrder,FSAppointment,String)	PX.Objects.FS	AppointmentEntry
CalculateRouteStats(PXGraph,FSAppointment,String,Boolean)	PX.Objects.FS	AppointmentEntry

Method	Namespace	Parent Class
InsertUpdateSODet(PXCache,FSAppointmentDet,PXSelectBase<FSSODet>,String)	PX.Objects.FS	AppointmentEntry
ValidateAppointmentStatusChange(FSAppointment,String)	PX.Objects.FS	AppointmentEntry
IsAppointmentStatusChangeValid(FSAppointment,String,String&)	PX.Objects.FS	AppointmentEntry
ChangeItemLineStatus(FSAppointmentDet,String,String)	PX.Objects.FS	AppointmentEntry
IsNewItemLineStatusValid(FSAppointmentDet,String,String)	PX.Objects.FS	AppointmentEntry
IsItemLineStatusChangeValid(FSAppointmentDet,String,String)	PX.Objects.FS	AppointmentEntry
CanItemLineStatusBeChangedAccordingHeader()	PX.Objects.FS	AppointmentEntry
ShouldShowMarkForPOFields()	PX.Objects.FS	AppointmentEntry
GetRelatedApptLines(PXGraph,Nullable<Int32>,Boolean,Nullable<Int32>,Boolean,Boolean)	PX.Objects.FS	AppointmentEntry
EnableDisableStaffLineActions(FSAppointmentEmployee)	PX.Objects.FS	AppointmentEntry
EnableDisableItemLineActions(FSAppointmentDet)	PX.Objects.FS	AppointmentEntry
QuickProcess(PXAdapter)	PX.Objects.FS	AppointmentEntry
OnApptStartTimeChangeUpdateLogStartTime(FSAppointment,FSSrvOrdType,AppointmentCore+AppointmentLog_View)	PX.Objects.FS	AppointmentEntry
OnApptEndTimeChangeUpdateLogEndTime(FSAppointment,FSSrvOrdType,AppointmentCore+AppointmentLog_View)	PX.Objects.FS	AppointmentEntry
StartStaffAction()	PX.Objects.FS	AppointmentEntry
StartServiceBasedOnAssignmentAction()	PX.Objects.FS	AppointmentEntry

Method	Namespace	Parent Class
ButtonHandler(PXAdapter)	PX.Objects.FS	AppointmentEntry+AppointmentQuickProcess
UpdateBillingInfoInDoc(PXGraph,FSServiceOrder,Nullable<Int32>,Nullable<Int32>,Boolean,Boolean,Dictionary<BillingCycleMaint+BillingCycleIDAndDate,Nullable<DateTime>>)	PX.Objects.FS	BillingCycleMaint
SaveWrkProcessParameters(FSWrkProcess)	PX.Objects.FS	WrkProcess
LaunchAppointmentEntryScreen(PXGraph,FSWrkProcess,Boolean)	PX.Objects.FS	WrkProcess
AssignAppointmentEmployee(FSAppointmentScheduleBoard,ExternalControls,AppointmentEntry,ExternalControls+DispatchBoardAppointmentMessages&)	PX.Objects.FS	WrkProcess
UpdateServiceOrderHeader(ServiceOrderEntry,PXCache,CRCase,FSCreateServiceOrderOnCaseFilter,FSServiceOrder,Boolean)	PX.Objects.FS	CRExtensionHelper
UpdateServiceOrderHeader(ServiceOrderEntry,PXCache,CROpportunity,FSCreateServiceOrderFilter,FSServiceOrder,CRContact,CRAAddress,Boolean)	PX.Objects.FS	CRExtensionHelper
GetServiceOrderLinkedToOpportunity(PXGraph,CROpportunity)	PX.Objects.FS	CRExtensionHelper
InsertFSSODetFromOpportunity(ServiceOrderEntry,PXCache,CRSetup,CROpportunityProducts,FSxCROpportunityProducts,InventoryItem)	PX.Objects.FS	CRExtensionHelper
UpdateFSSODetFromOpportunity(PXCache,FSSODet,CROpportunityProducts,FSxCROpportunityProducts,String)	PX.Objects.FS	CRExtensionHelper
get_IsMultyCurrencyEnabled()	PX.Objects.FS	ExtensionHelper
GetCurrencyInfo(PXGraph,Nullable<Int64>)	PX.Objects.FS	ExtensionHelper
.ctor()	PX.Objects.FS	FSSelectorContactAttribute
GetErrorInfo<TranType,TranExtensionType>(PXCache,IBqlTable,PXSelectBase<TranType>)	PX.Objects.FS	MessageHelper

Method	Namespace	Parent Class
InvoiceBillingPeriod(FSSetup,FSContractPostDoc)	PX.Objects.FS	ServiceContractEntryBase<TGraph,TPrimary,TWhere>
.ctor(IDocLine,ARTran,FSxARTran)	PX.Objects.FS	SharedClasses+SOARLineEquipmentComponent
.ctor(ARTran,FSxARTran)	PX.Objects.FS	SharedClasses+SOPrepaymentBySO
Add(ARTran,FSxARTran)	PX.Objects.FS	SharedClasses+SOPrepaymentHelper
GetDateRange(DateTime,String)	PX.Objects.FS	SharedFunctions
UpdateBillingInfoInDocsLO(PXGraph,Nullable<Int32>,Nullable<Int32>)	PX.Objects.FS	SharedFunctions
WarnUserWithServiceOrdersWithoutBillingSettings(PXCache,CreateInvoiceFilter,PXAction<CreateInvoiceFilter>)	PX.Objects.FS	SharedFunctions
WarnUserWithServiceOrdersWithoutBillingSettings(PXGraph,PXCache,CreateInvoiceFilter,PXAction<CreateInvoiceFilter>)	PX.Objects.FS	SharedFunctions
ServiceOrdersWithoutBillingSettings_PossibleFix(PXGraph)	PX.Objects.FS	SharedFunctions
ServiceOrdersWithoutBillingSettings(PXGraph)	PX.Objects.FS	SharedFunctions
PreUpdateBillingInfoDocs(PXGraph,Nullable<Int32>,Nullable<Int32>)	PX.Objects.FS	SharedFunctions
SlotsContainedInSlot(Nullable<DateTime>,Nullable<DateTime>,Nullable<DateTime>,Nullable<DateTime>)	PX.Objects.FS	SharedFunctions
GetBillableFieldValues(PXGraph,IFSSODetBase,Nullable<Int32>,Nullable<Decimal>&,Nullable<Int32>&)	PX.Objects.FS	SharedFunctions
CompleteAppointments(PXGraph,PXResultset<FSAppointmentInRoute>)	PX.Objects.FS	SharedFunctions
CancelAppointments(PXGraph,List<PXResult<FSAppointmentInRoute>>)	PX.Objects.FS	SharedFunctions
CloseAppointments(PXResultset<FSAppointment>)	PX.Objects.FS	SharedFunctions

Method	Namespace	Parent Class
CancelAppointments(PXGraph,PXResultset<FSAppointment>)	PX.Objects.FS	SharedFunctions
MoveAppointmentInRoute(PXGraph,FSRouteDocument,Nullable<Int32>, Nullable<Int32>)	PX.Objects.FS	SharedFunctions
CreateSoldEquipment(SMEquipmentMaint,SoldInventoryItem,ARTran,FSx ARTran,SOLine,String,InventoryItem)	PX.Objects.FS	SharedFunctions
ChangeAppointmentStatus(PXView,Object,String)	PX.Objects.FS	SharedFunctions
PropagateBaseUnitToContracts(PXCache,InventoryItem,PXTranStatus,PX DBOperation,Boolean)	PX.Objects.FS	SharedFunctions
IsServiceRelatedToAnyContract(PXCache,Nullable<Int32>)	PX.Objects.FS	SharedFunctions
GetInstanceUrl(String,String,String)	PX.Objects.FS	SharedFunctions
CheckAccessRights(String,Type,Type,PXCacheRights)	PX.Objects.FS	SharedFunctions
Right(String,Int32)	PX.Objects.FS	SharedFunctions
GetCustomerIDFromProjectID(PXGraph,Nullable<Int32>)	PX.Objects.FS	SharedFunctions
GetVendorRow(PXGraph,Nullable<Int32>)	PX.Objects.FS	SharedFunctions
UpdateEquipmentAction(PXCache,Object,Boolean)	PX.Objects.FS	SharedFunctions
UpdateEquipmentAction(PXCache,Object,Nullable<Int32>,String,String,String,Object,Nullable<Int32>,Nullable<Int32>,String,String,String,String,String,String,String,Boolean)	PX.Objects.FS	SharedFunctions
SetInventoryItemExtensionInfo(PXGraph,Nullable<Int32>,Object)	PX.Objects.FS	SharedFunctions
IsAppointmentNotStarted(FSAppointment)	PX.Objects.FS	SharedFunctions
IsServiceOrderClosed(FSServiceOrder)	PX.Objects.FS	SharedFunctions

Method	Namespace	Parent Class
GetContractPeriodEndDate(FSServiceContract,Nullable<DateTime>)	PX.Objects.FS	SharedFunctions
GetRequireCustomerSignature(PXGraph,FSSrvOrdType,FSServiceOrder)	PX.Objects.FS	SharedFunctions
ValidateSrvOrdTypeNumberingSequence(PXGraph,String)	PX.Objects.FS	SharedFunctions
GetLineTypeFromInventoryItem(InventoryItem)	PX.Objects.FS	SharedFunctions
ConvertToPOLine(POLineUOpen)	PX.Objects.FS	SharedFunctions
IsFSSODetWaitingForPart(FSSODet,List<POLine>)	PX.Objects.FS	SharedFunctions
ValidateDuplicateLineNbr(PXSelectBase<FSSODet>,PXSelectBase<FSAppointmentDet>)	PX.Objects.FS	SharedFunctions
ValidateDuplicateLineNbr<DetailType>(List<Nullable<Int32>>,List<DetailType>,PXCACHE)	PX.Objects.FS	SharedFunctions
GetLineType(String,Boolean)	PX.Objects.FS	SharedFunctions
GetItemLineRef(PXGraph,Nullable<Int32>,Boolean)	PX.Objects.FS	SharedFunctions
DisableAllDACFields(PXCACHE,Object,List<Type>)	PX.Objects.FS	SharedFunctions
EnableDisableDocumentByWorkflowStage(FSWFStage,List<PXCACHE>,Dictionary<String,PXAction>,List<PXAction>,List<PXView>)	PX.Objects.FS	TreeWFStageHelper
EnableDisableActionsByWorkflowStage(PXCACHE,FSWFStage,PXAction,PXAction,PXAction,PXAction)	PX.Objects.FS	TreeWFStageHelper
SaveUserSelection(List<TPostLine>)	PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>
UpdateUserSelection(PXGraph,FSCreatedDoc,Guid,Nullable<Int32>,String)	PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>
CreatePostRegister(PXGraph,List<DocLineExt>,FSCreatedDoc,Guid)	PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>

Method	Namespace	Parent Class
UpdatePostInfoAndPostDet(List<DocLineExt>,FSPostBatch,PostInfoEntry,PXCache<FSPostDet>,FSCreatedDoc,FSCreatedDoc)	PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>
UpdateSourcePostDoc(PXCache<FSPostDet>,FSPostBatch,FSPostDoc)	PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>
DeallocateUnusedItems(ServiceOrderEntry,List<DocLineExt>,Boolean)	PX.Objects.FS	CreateInvoiceBase<TGraph,TPostLine>
CreateContractPostRegister(PXGraph,FSContractPostDoc)	PX.Objects.FS	CreateInvoiceByContractPost
UpdateSourcePostDoc(FSSetup,FSContractPostDoc,FSServiceContract)	PX.Objects.FS	CreateInvoiceByContractPost
get_IsInvoiceProcessRunning()	PX.Objects.FS	SM_APIInvoiceEntry
set_IsInvoiceProcessRunning(Boolean)	PX.Objects.FS	SM_APIInvoiceEntry
get_IsInvoiceProcessRunning()	PX.Objects.FS	SM_ARInvoiceEntry
set_IsInvoiceProcessRunning(Boolean)	PX.Objects.FS	SM_ARInvoiceEntry
FillAppointmentSOFields(PXCache,ARTran)	PX.Objects.FS	SM_ARInvoiceEntry
FillEquipmentFields(PXCache,ARTran)	PX.Objects.FS	SM_ARInvoiceEntry
PrepareReversalARTran(ARTran)	PX.Objects.FS	SM_ARInvoiceEntry
CreateReversalARTran(ARTran,ReverseInvoiceArgs,SM_ARInvoiceEntry+CreateReversalARTranOrig)	PX.Objects.FS	SM_ARInvoiceEntry
get_IsInvoiceProcessRunning()	PX.Objects.FS	SM_INIssueEntry
set_IsInvoiceProcessRunning(Boolean)	PX.Objects.FS	SM_INIssueEntry
get_IsInvoiceProcessRunning()	PX.Objects.FS	SM_RegisterEntry
set_IsInvoiceProcessRunning(Boolean)	PX.Objects.FS	SM_RegisterEntry
get_IsInvoiceProcessRunning()	PX.Objects.FS	SM_SOInvoiceEntry

Method	Namespace	Parent Class
set_IsInvoiceProcessRunning(Boolean)	PX.Objects.FS	SM_SOInvoiceEntry
InsertSOInvoiceLine(PXGraph,ARInvoice,DocLineExt,Nullable<Int32>,Nullable<Decimal>,String,Nullable<Int32>,Nullable<Int32>,String,OnTransactionInsertedDelegate,List<SharedClasses+SOARLineEquipmentComponent>)	PX.Objects.FS	SM_SOInvoiceEntry
get_IsInvoiceProcessRunning()	PX.Objects.FS	SM_SOOrderEntry
set_IsInvoiceProcessRunning(Boolean)	PX.Objects.FS	SM_SOOrderEntry
get_ServiceContractID()	PX.Objects.FS	FSAppointment
set_ServiceContractID(Nullable<Int32>)	PX.Objects.FS	FSAppointment
get_GeneratedBySystem()	PX.Objects.FS	FSAppointment
set_GeneratedBySystem(Nullable<Boolean>)	PX.Objects.FS	FSAppointment
get_BillingPeriod()	PX.Objects.FS	FSContractPeriod
set_BillingPeriod(String)	PX.Objects.FS	FSContractPeriod
get_InstServiceOrderID()	PX.Objects.FS	FSEquipment
set_InstServiceOrderID(Nullable<Int32>)	PX.Objects.FS	FSEquipment
get_InstAppointmentID()	PX.Objects.FS	FSEquipment
set_InstAppointmentID(Nullable<Int32>)	PX.Objects.FS	FSEquipment
get_DispatchServiceOrderID()	PX.Objects.FS	FSEquipment
set_DispatchServiceOrderID(Nullable<Int32>)	PX.Objects.FS	FSEquipment
get_DispatchAppointmentID()	PX.Objects.FS	FSEquipment
set_DispatchAppointmentID(Nullable<Int32>)	PX.Objects.FS	FSEquipment

Method	Namespace	Parent Class
get_InstServiceOrderID()	PX.Objects.FS	FSEquipmentComponent
set_InstServiceOrderID(Nullable<Int32>)	PX.Objects.FS	FSEquipmentComponent
get_InstAppointmentID()	PX.Objects.FS	FSEquipmentComponent
set_InstAppointmentID(Nullable<Int32>)	PX.Objects.FS	FSEquipmentComponent
get_Source()	PX.Objects.FS	FSxAPTran
set_Source(String)	PX.Objects.FS	FSxAPTran
get_SOID()	PX.Objects.FS	FSxAPTran
set_SOID(Nullable<Int32>)	PX.Objects.FS	FSxAPTran
get_AppointmentID()	PX.Objects.FS	FSxAPTran
set_AppointmentID(Nullable<Int32>)	PX.Objects.FS	FSxAPTran
get_AppDetID()	PX.Objects.FS	FSxAPTran
set_AppDetID(Nullable<Int32>)	PX.Objects.FS	FSxAPTran
get_SODetID()	PX.Objects.FS	FSxAPTran
set_SODetID(Nullable<Int32>)	PX.Objects.FS	FSxAPTran
get_AppointmentDate()	PX.Objects.FS	FSxAPTran
set_AppointmentDate(Nullable<DateTime>)	PX.Objects.FS	FSxAPTran
get_ServiceOrderDate()	PX.Objects.FS	FSxAPTran
set_ServiceOrderDate(Nullable<DateTime>)	PX.Objects.FS	FSxAPTran
get_BillCustomerID()	PX.Objects.FS	FSxAPTran

Method	Namespace	Parent Class
set_BillCustomerID(Nullable<Int32>)	PX.Objects.FS	FSxAPTran
get_CustomerLocationID()	PX.Objects.FS	FSxAPTran
set_CustomerLocationID(Nullable<Int32>)	PX.Objects.FS	FSxAPTran
get_Source()	PX.Objects.FS	FSxINTran
set_Source(String)	PX.Objects.FS	FSxINTran
get_SOID()	PX.Objects.FS	FSxINTran
set_SOID(Nullable<Int32>)	PX.Objects.FS	FSxINTran
get_AppointmentID()	PX.Objects.FS	FSxINTran
set_AppointmentID(Nullable<Int32>)	PX.Objects.FS	FSxINTran
get_AppDetID()	PX.Objects.FS	FSxINTran
set_AppDetID(Nullable<Int32>)	PX.Objects.FS	FSxINTran
get_SODetID()	PX.Objects.FS	FSxINTran
set_SODetID(Nullable<Int32>)	PX.Objects.FS	FSxINTran
get_AppointmentDate()	PX.Objects.FS	FSxINTran
set_AppointmentDate(Nullable<DateTime>)	PX.Objects.FS	FSxINTran
get_BillCustomerID()	PX.Objects.FS	FSxINTran
set_BillCustomerID(Nullable<Int32>)	PX.Objects.FS	FSxINTran
get_CustomerLocationID()	PX.Objects.FS	FSxINTran
set_CustomerLocationID(Nullable<Int32>)	PX.Objects.FS	FSxINTran

Method	Namespace	Parent Class
get_Source()	PX.Objects.FS	FSxSOLine
set_Source(String)	PX.Objects.FS	FSxSOLine
get_SOID()	PX.Objects.FS	FSxSOLine
set_SOID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_AppointmentID()	PX.Objects.FS	FSxSOLine
set_AppointmentID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_AppDetID()	PX.Objects.FS	FSxSOLine
set_AppDetID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_SODetID()	PX.Objects.FS	FSxSOLine
set_SODetID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_AppointmentDate()	PX.Objects.FS	FSxSOLine
set_AppointmentDate(Nullable<DateTime>)	PX.Objects.FS	FSxSOLine
get_ServiceOrderDate()	PX.Objects.FS	FSxSOLine
set_ServiceOrderDate(Nullable<DateTime>)	PX.Objects.FS	FSxSOLine
get_BillCustomerID()	PX.Objects.FS	FSxSOLine
set_BillCustomerID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_CustomerLocationID()	PX.Objects.FS	FSxSOLine
set_CustomerLocationID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_ServiceContractID()	PX.Objects.FS	FSxSOLine

Method	Namespace	Parent Class
set_ServiceContractID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_ContractPeriodID()	PX.Objects.FS	FSxSOLine
set_ContractPeriodID(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_NewTargetEquipmentLineNbr()	PX.Objects.FS	FSxSOLine
set_NewTargetEquipmentLineNbr(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
get_EquipmentLineRef()	PX.Objects.FS	FSxSOLine
set_EquipmentLineRef(Nullable<Int32>)	PX.Objects.FS	FSxSOLine
PublicSkipTaxCalcAndSave()	PX.Objects.FS	AppointmentEntryExternalTax
PublicSkipTaxCalcAndSave()	PX.Objects.FS	ServiceOrderEntryExternalTax
GetSOLDRelated(APTran)	PX.Objects.FS	SM_APIInvoiceEntryExternalTax
GetSOLDRelated(ARTran)	PX.Objects.FS	SM_ARInvoiceEntryExternalTax
GetSOLDRelated(SOLine)	PX.Objects.FS	SM_SOOrderEntryExternalTax
CreateCustomFieldAppointments(FSCustomFieldAppointment[])	PX.Objects.FS	ExternalControls
PutCustomFieldAppointments(FSCustomFieldAppointment[])	PX.Objects.FS	ExternalControls
DeleteCustomFieldAppointments(FSCustomFieldAppointment[])	PX.Objects.FS	ExternalControls
CreateCustomAppointmentStatuses(FSCustomAppointmentStatus[])	PX.Objects.FS	ExternalControls
PutCustomAppointmentStatuses(FSCustomAppointmentStatus[])	PX.Objects.FS	ExternalControls
DeleteCustomAppointmentStatuses(FSCustomAppointmentStatus[])	PX.Objects.FS	ExternalControls

Method	Namespace	Parent Class
ServiceOrderRecords(Nullable<Int32>,Nullable<Int32>,ExternalControls+DispatchBoardFilters[],Nullable<DateTime>,Nullable<DateTime>,Nullable<Boolean>)	PX.Objects.FS	ExternalControls
GetAppointmentRecords(DateTime,DateTime,Nullable<Int32>,Nullable<Int32>,Int32[])	PX.Objects.FS	ExternalControls
UnassignedAppointmentRecords(DateTime,DateTime,Nullable<Int32>,Nullable<Int32>,Nullable<Boolean>,ExternalControls+DispatchBoardFilters[])	PX.Objects.FS	ExternalControls
.ctor()	PX.Objects.FS	ContractInvoiceLine
UpdateSourcePostDoc(PXCache<FSPostDet>,FSPostBatch,FSPostDoc)	PX.Objects.FS	InvoiceProcessGraph
SaveBeforeApplyAction(PXCache,FSServiceOrder)	PX.Objects.FS	ServiceOrderEntry
ActionsMenu(PXAdapter)	PX.Objects.FS	ServiceOrderEntry
OpenBatch(PXAdapter)	PX.Objects.FS	ServiceOrderEntry
CloseOrder()	PX.Objects.FS	ServiceOrderEntry
UncloseOrder()	PX.Objects.FS	ServiceOrderEntry
UncloseOrderWithOptions(Boolean)	PX.Objects.FS	ServiceOrderEntry
ReopenOrder()	PX.Objects.FS	ServiceOrderEntry
ConvertToServiceOrder()	PX.Objects.FS	ServiceOrderEntry
openINPostingDocument()	PX.Objects.FS	ServiceOrderEntry
openInvoiceDocument()	PX.Objects.FS	ServiceOrderEntry
EnableDisable_ActionButtons(FSServiceOrder,PXCache)	PX.Objects.FS	ServiceOrderEntry
DisableAllDACFields(PXCache,Object,List<Type>)	PX.Objects.FS	ServiceOrderEntry

Method	Namespace	Parent Class
EnableDisableDocumentByWorkflowStage(PXCache,FSWFStage)	PX.Objects.FS	ServiceOrderEntry
ChangeDetailsLinesStatus(IEnumerable<FSSODet>,String)	PX.Objects.FS	ServiceOrderEntry
CloseAppointmentsInServiceOrder(ServiceOrderEntry,FSServiceOrder,WebDialogResult)	PX.Objects.FS	ServiceOrderEntry
ShowAsk(ServiceOrderEntry,PXView,String,WebDialogResult&)	PX.Objects.FS	ServiceOrderEntry
ShouldShowMarkForPOFields()	PX.Objects.FS	ServiceOrderEntry
ShouldShowMarkForPOFieldsInt(SOOrderType)	PX.Objects.FS	ServiceOrderEntry
QuickProcess(PXAdapter)	PX.Objects.FS	ServiceOrderEntry
ButtonHandler(PXAdapter)	PX.Objects.FS	ServiceOrderEntry+ServiceOrderQuickProcess
set_Status(Nullable<Int32>)	PX.Objects.AM	AMBomItem
get_QueueTime()	PX.Objects.AM	AMBomOper
set_QueueTime(Nullable<Int32>)	PX.Objects.AM	AMBomOper
Method	Namespace	Parent Class
set_Status(Nullable<Int32>)	PX.Objects.AM	AMECOItem
set_Status(Nullable<Int32>)	PX.Objects.AM	AMECRItem
get_QueueTime()	PX.Objects.AM	AMEstimateOper
set_QueueTime(Nullable<Int32>)	PX.Objects.AM	AMEstimateOper
get_SchdTime()	PX.Objects.AM	AMMachSchd
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMMachSchd

Method	Namespace	Parent Class
get_SchdEfficiencyTime()	PX.Objects.AM	AMMachSchd
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	AMMachSchd
get_SchdTime()	PX.Objects.AM	AMMachSchdDetail
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMMachSchdDetail
get_SchdEfficiencyTime()	PX.Objects.AM	AMMachSchdDetail
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	AMMachSchdDetail
set_Status(Nullable<Int32>)	PX.Objects.AM	AMMultiLevelBomData
set_MaterialStatus(Nullable<Int32>)	PX.Objects.AM	AMMultiLevelBomData
set_LineStatus(Nullable<Int32>)	PX.Objects.AM	AMMultiLevelBomData
get_QueueTime()	PX.Objects.AM	AMProdOper
set_QueueTime(Nullable<Int32>)	PX.Objects.AM	AMProdOper
get_WaitTime()	PX.Objects.AM	AMProdOper
set_WaitTime(Nullable<Int32>)	PX.Objects.AM	AMProdOper
get_MachineScheduling()	PX.Objects.AM	AMPSetup
set_MachineScheduling(Nullable<Boolean>)	PX.Objects.AM	AMPSetup
get_ToolScheduling()	PX.Objects.AM	AMPSetup
set_ToolScheduling(Nullable<Boolean>)	PX.Objects.AM	AMPSetup
get_MoveTime()	PX.Objects.AM	AMPSetup
set_MoveTime(Nullable<Decimal>)	PX.Objects.AM	AMPSetup

Method	Namespace	Parent Class
get_DefaultMoveTime()	PX.Objects.AM	AMPSetup
set_DefaultMoveTime(Nullable<Int32>)	PX.Objects.AM	AMPSetup
get_QueueTime()	PX.Objects.AM	AMSchdOper
set_QueueTime(Nullable<Int32>)	PX.Objects.AM	AMSchdOper
get_MoveTime()	PX.Objects.AM	AMSchdOper
set_MoveTime(Nullable<Int32>)	PX.Objects.AM	AMSchdOper
get_TotPlanHrs()	PX.Objects.AM	AMSchdOper
set_TotPlanHrs(Nullable<Decimal>)	PX.Objects.AM	AMSchdOper
get_SchdTime()	PX.Objects.AM	AMSchdOperDetail
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMSchdOperDetail
get_SchdEfficiencyTime()	PX.Objects.AM	AMSchdOperDetail
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	AMSchdOperDetail
get_SchdTime()	PX.Objects.AM	AMToolSchdDetail
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMToolSchdDetail
get_SchdEfficiencyTime()	PX.Objects.AM	AMToolSchdDetail
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	AMToolSchdDetail
get_SchdTime()	PX.Objects.AM	AMWCSchd
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMWCSchd
get_SchdEfficiencyTime()	PX.Objects.AM	AMWCSchd

Method	Namespace	Parent Class
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	AMWCSchd
get_SchdTime()	PX.Objects.AM	AMWCSchdDetail
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMWCSchdDetail
get_SchdEfficiencyTime()	PX.Objects.AM	AMWCSchdDetail
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	AMWCSchdDetail
get_SchdTime()	PX.Objects.AM	AMWCSchdDetailGroupByWcSchiftDate
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	AMWCSchdDetailGroupByWcSchiftDate
UpdateECRStatus(String,Int32)	PX.Objects.AM	ECOMaint
UpdateECRStatus(AMECRItem,Int32)	PX.Objects.AM	ECOMaint
get_SchdEfficiencyTime()	PX.Objects.AM	ISchd
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	ISchd
get_SchdTime()	PX.Objects.AM	ISchdDetail
set_SchdTime(Nullable<Int32>)	PX.Objects.AM	ISchdDetail
get_SchdEfficiencyTime()	PX.Objects.AM	ISchdDetail
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM	ISchdDetail
Action(PXAdapter,Nullable<Int32>,String)	PX.Objects.AM	VendorShipmentEntry
set_Status(Nullable<Int32>)	PX.Objects.AM	VisualBOMMaint+VisualBOMFilter
get_AMReplenishmentPolicyOverride()	PX.Objects.AM.Cac heExtensions	INItemSiteExt

Method	Namespace	Parent Class
set_AMReplenishmentPolicyOverride(Nullable<Boolean>)	PX.Objects.AM.CacheExtensions	INItemSiteExt
get_AMReplenishmentSource()	PX.Objects.AM.CacheExtensions	INItemSiteExt
set_AMReplenishmentSource(String)	PX.Objects.AM.CacheExtensions	INItemSiteExt
get_AMReplenishmentSourceSiteID()	PX.Objects.AM.CacheExtensions	INItemSiteExt
set_AMReplenishmentSourceSiteID(Nullable<Int32>)	PX.Objects.AM.CacheExtensions	INItemSiteExt
get_SchdEfficiencyTime()	PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail
set_SchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail
get_DetailSchdTime()	PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail
set_DetailSchdTime(Nullable<Int32>)	PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail
get_DetailSchdEfficiencyTime()	PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail
set_DetailSchdEfficiencyTime(Nullable<Int32>)	PX.Objects.AM.Upgrade	AMWCSchdNotMatchingDetail
GetListDescription(Nullable<Int32>)	PX.Objects.AM.Attributes	AMBomStatus
get_Printed()	PX.Objects.PR	PRPayment

Method	Namespace	Parent Class
set_Printed(Nullable<Boolean>)	PX.Objects.PR	PRPayment
get_ChkReprintType()	PX.Objects.PR	PRPayment
set_ChkReprintType(String)	PX.Objects.PR	PRPayment
get_LeaveType()	PX.Objects.PR	PRSetup
set_LeaveType(String)	PX.Objects.PR	PRSetup
GetIncorrectDateMessage(DateTime,DateTime)	PX.Objects.PR	DateInPeriodAttribute
release(PXAdapter)	PX.Objects.PR	PRDirectDepositBatchEntry
printPayStubs(PXAdapter)	PX.Objects.PR	PRDirectDepositBatchEntry
ReleaseDoc(CABatch)	PX.Objects.PR	PRDirectDepositBatchEntry
GenerateFileName(CABatch)	PX.Objects.PR	PRDirectDepositBatchEntry
action()	PX.Objects.PR	PRPayBatchEntry
printCheck()	PX.Objects.PR	PRPayChecksAndAdjustments
cancelPrint()	PX.Objects.PR	PRPayChecksAndAdjustments
Method	Namespace	Parent Class
GetTaxTypes(String,String,String)	PX.Objects.PR	IPayrollClientTaxService
GetAllLocationTaxTypes(IEnumerable<Address>)	PX.Objects.PR	IPayrollClientTaxService
GetTaxTypes(String,String,String)	PX.Objects.PR	PayrollTaxClient
GetAllLocationTaxTypes(IEnumerable<Address>)	PX.Objects.PR	PayrollTaxClient

Method	Namespace	Parent Class
AddTaxSetting(String,String,Decimal,Decimal,Decimal,Decimal,Decimal,Decimal,Decimal,IPRReflectiveSettingMapper<TaxTypeAttribute>,Dictionary<String,String>)	PX.Objects.PR	PayrollCalculationProxy
Approve(PXAdapter)	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
Reject(PXAdapter)	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
Action(PXAdapter)	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
Report(PXAdapter)	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
InititalizeActionsMenu()	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
InitializeReportsMenu()	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
reopen()	PX.Objects.PJ.RequestsForInformation.PJ.Graphs	RequestForInformationMaint
IsOpen(RequestForInformation)	PX.Objects.PJ.RequestsForInformation.PJ.Extensions	RequestForInformationExtensions
IsNotClosed(RequestForInformation)	PX.Objects.PJ.RequestsForInformation.PJ.Extensions	RequestForInformationExtensions
IsDefinitelyClosed(RequestForInformation)	PX.Objects.PJ.RequestsForInformation.PJ.Extensions	RequestForInformationExtensions

Removed Fields

This section lists the public fields whose visibility has been changed in the code or that have been removed from the code. The list does not include the fields from the deleted and obsolete classes. The list also does not include the fields whose parent classes implement PX.Data.IBqlTable or PX.Data.Constant.

Field	Namespace	Parent Class
DisableScheduleProcessor	PX.Common	WebConfig
LocalizeConstants	PX.Common	PXCommonLocalizer
cultDict	PX.Translation	PXDictionaryManager
_ADGroupCacheLimit	PX.SM	Access
ConfirmRecordDeleting	PX.SM	Messages
connectionString	PX.Data	PXDatabaseProvider
ErrorContextShell	PX.Data	ErrorMessages
HANDLER_PAGE	PX.Data.Auth	ExternalAuthenticationModule
initialised	PX.Data.Auth	ExternalAuthenticationModule
initExternalError	PX.Data.Auth	ExternalAuthenticationModule
initFederatedError	PX.Data.Auth	ExternalAuthenticationModule
session	PX.Data.Auth	ExternalAuthenticationModule
federation	PX.Data.Auth	ExternalAuthenticationModule
value__	PX.Data.Access	ActiveDirectoryProtocol
LDAP	PX.Data.Access	ActiveDirectoryProtocol
ADAL	PX.Data.Access	ActiveDirectoryProtocol

Field	Namespace	Parent Class
Claim	PX.Data.Access	ActiveDirectoryProtocol
_MEMBERSHIPS_SECTION_PATH	PX.Data.Access	ActiveDirectoryProvider
Empty	PX.Data.Access	ActiveDirectoryProvider
_config	PX.Data.Access	ActiveDirectoryProvider
_instance	PX.Data.Access	ActiveDirectoryProvider
_defaultDC	PX.Data.Access	ActiveDirectoryProvider
_defaultDCCalced	PX.Data.Access	ActiveDirectoryProvider
_usersCache	PX.Data.Access	ActiveDirectoryProvider
_usersByGroupCache	PX.Data.Access	ActiveDirectoryProvider
_groupsByUserCache	PX.Data.Access	ActiveDirectoryProvider
_allUsersCache	PX.Data.Access	ActiveDirectoryProvider
_allGroupsCache	PX.Data.Access	ActiveDirectoryProvider
_allDomains	PX.Data.Access	ActiveDirectoryProvider
DefaultTokenURL	PX.Data.Access	ADALActiveDirectoryProvider
DefaultDirectoryURL	PX.Data.Access	ADALActiveDirectoryProvider
DefaultDirectoryVersion	PX.Data.Access	ADALActiveDirectoryProvider
_adaltoken	PX.Data.Access	ADALActiveDirectoryProvider
_token	PX.Data.Access	ADALActiveDirectoryProvider
_service	PX.Data.Access	ADALActiveDirectoryProvider

Field	Namespace	Parent Class
All	PX.Objects.SM	SearchCategory
hold	PX.Objects.RQ	RQRequestEntry
Save	PX.Objects.RQ	RQRequisitionEntry
Cancel	PX.Objects.RQ	RQRequisitionEntry
Insert	PX.Objects.RQ	RQRequisitionEntry
Delete	PX.Objects.RQ	RQRequisitionEntry
CopyPaste	PX.Objects.RQ	RQRequisitionEntry
First	PX.Objects.RQ	RQRequisitionEntry
Previous	PX.Objects.RQ	RQRequisitionEntry
Next	PX.Objects.RQ	RQRequisitionEntry
Last	PX.Objects.RQ	RQRequisitionEntry
hold	PX.Objects.RQ	RQRequisitionEntry
_Tax	PX.Objects.TX	TaxAdjustmentEntry
_TaxRev	PX.Objects.TX	TaxAdjustmentEntry
AutoPackagingIssuesCheckTrace	PX.Objects.SO	Messages
NonStockItem	PX.Objects.SO	Messages
pmselect	PX.Objects.SO	SOInvoiceEntry
pmselect	PX.Objects.SO	SOOrderEntry
currentposupply	PX.Objects.SO	SOOrderEntry

Field	Namespace	Parent Class
posupply	PX.Objects.SO	SOOrderEntry
poorderlink	PX.Objects.SO	SOOrderEntry
pOSupplyOK	PX.Objects.SO	SOOrderEntry
inventorySummary	PX.Objects.SO	SOOrderEntry
viewDemand	PX.Objects.PO	POOrderEntry
pmselect	PX.Objects.PO	POReceiptEntry
approve	PX.Objects.PM	ChangeOrderEntry
reject	PX.Objects.PM	ChangeOrderEntry
action	PX.Objects.PM	ChangeOrderEntry
report	PX.Objects.PM	ChangeOrderEntry
ProjectDefault	PX.Objects.PM	PMAcctSubDefault
TaskDefault	PX.Objects.PM	PMAcctSubDefault
HasRollupData	PX.Objects.PM	Messages
BillingIDsNotDefined	PX.Objects.PM	Messages
AccountNotFound	PX.Objects.PM	Messages
ProjectIDsNotSpecifiedForActivity	PX.Objects.PM	Messages
CommitmentsAutoCannotBeModified	PX.Objects.PM	Messages
BudgetNotDefinedForCostCode	PX.Objects.PM	Messages
EmailSendFailed	PX.Objects.PM	Messages

Field	Namespace	Parent Class
DefaultAccountInProjectDoesnotMatchAccountGroup	PX.Objects.PM	Messages
DefaultAccountInTaskDoesnotMatchAccountGroup	PX.Objects.PM	Messages
SalesAccountInItemDoesnotMatchAccountGroup	PX.Objects.PM	Messages
DefaultAccountIsNotConfigured	PX.Objects.PM	Messages
RetainageNotApplicable	PX.Objects.PM	Messages
ChangeOrderWorkflowLineCannotBeUpdated	PX.Objects.PM	Messages
NewTask	PX.Objects.PM	Messages
ViewBalance	PX.Objects.PM	Messages
FullDetail	PX.Objects.PM	Messages
ProcBill	PX.Objects.PM	Messages
ProcBillAll	PX.Objects.PM	Messages
Approve	PX.Objects.PM	Messages
ApproveAll	PX.Objects.PM	Messages
Allocate	PX.Objects.PM	Messages
AddTasks	PX.Objects.PM	Messages
Filter	PX.Objects.PM	Messages
Reject	PX.Objects.PM	Messages

Field	Namespace	Parent Class
Assign	PX.Objects.PM	Messages
ApprovalDate	PX.Objects.PM	Messages
FailedSelectProjectTask	PX.Objects.PM	Messages
PendingInvoiceAmountTotal	PX.Objects.PM	Messages
TemplateChangedDialogHeader	PX.Objects.PM	Messages
ProjectBalances	PX.Objects.PM	Messages
RegisterEntry	PX.Objects.PM	Messages
ProjectEntry	PX.Objects.PM	Messages
ProjectBalanceEntry	PX.Objects.PM	Messages
ProjectBalanceByPeriodEntry	PX.Objects.PM	Messages
ProjectAttributeGroupMaint	PX.Objects.PM	Messages
AccountGroupMaint	PX.Objects.PM	Messages
EquipmentMaint	PX.Objects.PM	Messages
RateDefinitionMaint	PX.Objects.PM	Messages
BillingMaint	PX.Objects.PM	Messages
RegisterRelease	PX.Objects.PM	Messages
AllocationProcess	PX.Objects.PM	Messages
AllocationProcessByProject	PX.Objects.PM	Messages
BillingProcess	PX.Objects.PM	Messages

Field	Namespace	Parent Class
ReverseUnbilledProcess	PX.Objects.PM	Messages
TaskInquiry	PX.Objects.PM	Messages
TemplateMaint	PX.Objects.PM	Messages
TemplateTaskMaint	PX.Objects.PM	Messages
TemplateGlobalTaskListMaint	PX.Objects.PM	Messages
TemplateGlobalTaskMaint	PX.Objects.PM	Messages
PMAllocator	PX.Objects.PM	Messages
PMProFormaAddress	PX.Objects.PM	Messages
PMProFormaContact	PX.Objects.PM	Messages
EquipmentAnswers	PX.Objects.PM	Messages
ChangeRequestLine	PX.Objects.PM	Messages
PMProjectStatus	PX.Objects.PM	Messages
Employee	PX.Objects.PM	Messages
Inventory	PX.Objects.PM	Messages
PMQuoteTask	PX.Objects.PM	Messages
NotStarted	PX.Objects.PM	Messages
ProjectDefault	PX.Objects.PM	Messages
TaskDefault	PX.Objects.PM	Messages
costCodeField	PX.Objects.PM	PMWorkCodeAttribute

Field	Namespace	Parent Class
pmhistory	PX.Objects.PM	ExternalCommitmentEntry
budget	PX.Objects.PM	ExternalCommitmentEntry
pmselect	PX.Objects.PM	POOrderEntryExt
approve	PX.Objects.PM	ProformaEntry
reject	PX.Objects.PM	ProformaEntry
action	PX.Objects.PM	ProformaEntry
report	PX.Objects.PM	ProformaEntry
aptran	PX.Objects.PM	ProjectBalanceValidationProcess
artran	PX.Objects.PM	ProjectBalanceValidationProcess
solines	PX.Objects.PM	ProjectBalanceValidationProcess
action	PX.Objects.PM	ProjectEntry
inquiry	PX.Objects.PM	ProjectEntry
report	PX.Objects.PM	ProjectEntry
viewRevenueCommitments	PX.Objects.PM	ProjectEntry
report	PX.Objects.IN	INAdjustmentEntry
sitestatusfilter	PX.Objects.IN	INAdjustmentEntry
sitestatus	PX.Objects.IN	INAdjustmentEntry
addInvBySite	PX.Objects.IN	INAdjustmentEntry
addInvSelBySite	PX.Objects.IN	INAdjustmentEntry

Field	Namespace	Parent Class
report	PX.Objects.IN	INIssueEntry
sitestatusfilter	PX.Objects.IN	INIssueEntry
sitestatus	PX.Objects.IN	INIssueEntry
addInvBySite	PX.Objects.IN	INIssueEntry
addInvSelBySite	PX.Objects.IN	INIssueEntry
report	PX.Objects.IN	INReceiptEntry
sitestatusfilter	PX.Objects.IN	INReceiptEntry
sitestatus	PX.Objects.IN	INReceiptEntry
addInvBySite	PX.Objects.IN	INReceiptEntry
addInvSelBySite	PX.Objects.IN	INReceiptEntry
iNLocationLabels	PX.Objects.IN	INSiteMaint
action	PX.Objects.IN	INSiteMaint
report	PX.Objects.IN	INSiteMaint
report	PX.Objects.IN	INTransferEntry
sitestatusfilter	PX.Objects.IN	INTransferEntry
sitestatus	PX.Objects.IN	INTransferEntry
addInvBySite	PX.Objects.IN	INTransferEntry
addInvSelBySite	PX.Objects.IN	INTransferEntry
Save	PX.Objects.IN	InventoryItemMaintBase

Field	Namespace	Parent Class
cancel	PX.Objects.IN	InventoryItemMaintBase
Insert	PX.Objects.IN	InventoryItemMaintBase
Edit	PX.Objects.IN	InventoryItemMaintBase
Delete	PX.Objects.IN	InventoryItemMaintBase
First	PX.Objects.IN	InventoryItemMaintBase
Prev	PX.Objects.IN	InventoryItemMaintBase
Next	PX.Objects.IN	InventoryItemMaintBase
Last	PX.Objects.IN	InventoryItemMaintBase
action	PX.Objects.IN	NonStockItemMaint
inquiry	PX.Objects.IN	NonStockItemMaint
action	PX.Objects.IN	InventoryItemMaint
inquiry	PX.Objects.IN	InventoryItemMaint
IDGenerationRules	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
DescriptionGenerationRules	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
IdRowUp	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
IdRowDown	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
DescriptionRowUp	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
DescriptionRowDown	PX.Objects.IN.Matrix.Graphs	TemplateInventoryItemMaint
ProcessingStatus	PX.Objects.Extensions.PaymentTransaction	PaymentTransactionGraph<TGraph,TPrimary>+ExternalTr

Field	Namespace	Parent Class
		TransactionDetailMapping
cVVVerification	PX.Objects.Extensions.PaymentTransaction	PaymentTransactionGraph<TGraph,TPrimary>+ExternalTransactionDetailMapping
MailProcessingIsTurnedOff	PX.Objects.EP	Messages
PutOnHold	PX.Objects.EP	Messages
action	PX.Objects.EP	EquipmentTimeCardMaint
action	PX.Objects.EP	ExpenseClaimDetailEntry
action	PX.Objects.EP	ExpenseClaimEntry
action	PX.Objects.EP	TimeCardMaint
AddSubcontracts	PX.Objects.CN.Subcontracts.AP.Descriptor	Messages
approve	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
reject	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
action	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
report	PX.Objects.CN.ProjectAccounting	CostProjectionEntry
Adjustments	PX.Objects.CN.JointChecks.AP.GraphExtensions.PreparePayments	ApPayBillsExt
HOLD	PX.Objects.GL	TrialBalanceImportMapStatusAttribute
BALANCED	PX.Objects.GL	TrialBalanceImportMapStatusAttribute
RELEASED	PX.Objects.GL	TrialBalanceImportMapStatusAttribute
TreeViewName	PX.Objects.GL.Attributes	BaseOrganizationTreeAttribute+TreeSelectorAttribute

Field	Namespace	Parent Class
Release	PX.Objects.CA	CABatchEntry
Export	PX.Objects.CA	CABatchEntry
report	PX.Objects.CA	CADepositEntry
reportsMenu	PX.Objects.CA	CAReconEntry
hold	PX.Objects.CA	CATranEntry
flow	PX.Objects.CA	CATranEntry
action	PX.Objects.CA	CATranEntry
inquiry	PX.Objects.CA	CATranEntry
reverse	PX.Objects.CA	CATranEntryExt
MethodsObsoleteAndWillBeRemoved2021 R1	PX.Objects.Common	InternalMessages
HoldPayments	PX.Objects.CR	BAccountR+status
Opportunity	PX.Objects.CR	OUOperation
Commitments	PX.Objects.AR	ARReleaseProcess
approve	PX.Objects.AR	ARInvoiceEntry
reject	PX.Objects.AR	ARInvoiceEntry
creditHold	PX.Objects.AR	ARInvoiceEntry
GLSetup	PX.Objects.AR	ARSetupMaint
Only_Invoices_MayBe_Payed	PX.Objects.AR	Messages

Field	Namespace	Parent Class
ERR_CCPProcessingEndpointCouldNotFindTransaction	PX.Objects.AR	Messages
Commitments	PX.Objects.AP	APReleaseProcess
Field	Namespace	Parent Class
approve	PX.Objects.AP	APInvoiceEntry
reject	PX.Objects.AP	APInvoiceEntry
action	PX.Objects.AP	APDataEntryGraph<TGraph,TPrimary>
inquiry	PX.Objects.AP	APDataEntryGraph<TGraph,TPrimary>
report	PX.Objects.AP	APDataEntryGraph<TGraph,TPrimary>
GLSetup	PX.Objects.AP	APSetupMaint
Only_Invoices_MayBe_Payed	PX.Objects.AP	Messages
UpdateSOStatusOnAppointmentUpdating	PX.Objects.FS	AppointmentEntry
openBatch	PX.Objects.FS	AppointmentEntry
OpenINPostingDocument	PX.Objects.FS	AppointmentEntry
OpenInvoiceDocument	PX.Objects.FS	AppointmentEntry
InventoryItemHelper	PX.Objects.FS	AppointmentEntry
WFStageRelated	PX.Objects.FS	AppointmentEntry
quickProcess	PX.Objects.FS	AppointmentEntry
fsxARTranRow	PX.Objects.FS	SharedClasses+SOARLineEquipmentComponent

Field	Namespace	Parent Class
SOID	PX.Objects.FS	SharedClasses+SOPrepaymentBySO
fsxARTranList	PX.Objects.FS	SharedClasses+SOPrepaymentBySO
INVOICE_POST	PX.Objects.FS	ID+PostRegister_Type
INVALID_SO_STATUS_TRANSITION	PX.Objects.FS	TX+Error
AUTOMATIC_SCHEDULED	PX.Objects.FS	TX+Status_Appointment
MANUAL_SCHEDULED	PX.Objects.FS	TX+Status_Appointment
SCHEDULED	PX.Objects.FS	TX+Status_Appointment
OPEN	PX.Objects.FS	TX+Status_ServiceOrder
QUOTE	PX.Objects.FS	TX+Status_ServiceOrder
ON_HOLD	PX.Objects.FS	TX+Status_ServiceOrder
CANCELED	PX.Objects.FS	TX+Status_ServiceOrder
CLOSED	PX.Objects.FS	TX+Status_ServiceOrder
COMPLETED	PX.Objects.FS	TX+Status_ServiceOrder
CustomFieldAppointment	PX.Objects.FS	ExternalControls
CustomFieldAppointments	PX.Objects.FS	ExternalControls
ActiveCustomFieldAppointments	PX.Objects.FS	ExternalControls
CustomAppointmentStatuses	PX.Objects.FS	ExternalControls
CustomAppointmentStatus	PX.Objects.FS	ExternalControls
CustomAppointmentStatusName	PX.Objects.FS	ExternalControls

Field	Namespace	Parent Class
BatchDetails	PX.Objects.FS	PostBatchMaint
SetupRecord	PX.Objects.FS	ServiceOrderEntry
BAccounts	PX.Objects.FS	ServiceOrderEntry
BAccountSelectorBaseView	PX.Objects.FS	ServiceOrderEntry
Vendors	PX.Objects.FS	ServiceOrderEntry
Helper	PX.Objects.FS	ServiceOrderEntry
InventoryItemHelper	PX.Objects.FS	ServiceOrderEntry
WFStageRelated	PX.Objects.FS	ServiceOrderEntry
actionsMenu	PX.Objects.FS	ServiceOrderEntry
openBatch	PX.Objects.FS	ServiceOrderEntry
convertToServiceOrder	PX.Objects.FS	ServiceOrderEntry
OpenINPostingDocument	PX.Objects.FS	ServiceOrderEntry
OpenInvoiceDocument	PX.Objects.FS	ServiceOrderEntry
quickProcess	PX.Objects.FS	ServiceOrderEntry
Insert	PX.Objects.AM	Forecast
Delete	PX.Objects.AM	Forecast
Insert	PX.Objects.AM	MPSMaint
Delete	PX.Objects.AM	MPSMaint
action	PX.Objects.AM	VendorShipmentEntry

Field	Namespace	Parent Class
_IsAssemblyType	PX.Objects.AM.Attributes	MfgLocationAvailAttribute
_IsAssemblyType	PX.Objects.AM.Attributes	MfgLocationRestrictorAttribute
Salary	PX.Objects.PR	EarningTypeCategory
PendingPrintOrPayment	PX.Objects.PR	PaymentStatus
CheckPrintedOrPaid	PX.Objects.PR	PaymentStatus
OpenPRST	PX.Objects.PR	Messages
Calculated	PX.Objects.PR	Messages
CheckPrintedOrPaid	PX.Objects.PR	Messages
DirectDepositPrinted	PX.Objects.PR	Messages
DirectDepositExported	PX.Objects.PR	Messages
ChecksAndDDsPrinted	PX.Objects.PR	Messages
ReleasedPRST	PX.Objects.PR	Messages
CheckPrintedPST	PX.Objects.PR	Messages
DirectDepositPrintedPST	PX.Objects.PR	Messages
Field	Namespace	Parent Class
PendingPrintOrPayment	PX.Objects.PR	Messages
Salary	PX.Objects.PR	Messages
Release	PX.Objects.PR	PRDirectDepositBatchEntry
PrintPayStubs	PX.Objects.PR	PRDirectDepositBatchEntry

Field	Namespace	Parent Class
Splits	PX.Objects.PR	PRCABatchUpdate
Action	PX.Objects.PR	PRPayBatchEntry
PrintCheck	PX.Objects.PR	PRPayChecksAndAdjustments
CancelPrint	PX.Objects.PR	PRPayChecksAndAdjustments
TaxUpdateHistory	PX.Objects.PR	PRTaxMaintenance
approve	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
reject	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
action	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
report	PX.Objects.PM.ChangeRequest	ChangeRequestEntry
Reopen	PX.Objects.PJ.RequestsForInformation.PJ.Graphs	RequestForInformationMaint

New PK and FK classes

This section lists the new primary and foreign keys; that is, the public classes that are derived from `PX.Data.ReferentialIntegrity.Attributes.PrimaryKeyOf`.

Namespace	Key
PX.EP	EPLoginType+PK
PX.EP	EPLoginType+UK
PX.EP	EPLoginTypeAllowsRole+PK
PX.EP	EPLoginTypeAllowsRole+FK+LoginType

Namespace	Key
PX.EP	EPLoginTypeAllowsRole+FK+Role
PX.CS	RMColumn+PK
PX.CS	RMColumn+FK+DataSource
PX.CS	RMColumn+FK+ColumnSet
PX.CS	RMColumnSet+PK
PX.CS	RMDDataSource+PK
PX.CS	RMReport+PK
PX.CS	RMReport+FK+RowSet
PX.CS	RMReport+FK+ColumnSet
PX.CS	RMReport+FK+UnitSet
PX.CS	RMReport+FK+DataSource
PX.CS	RMRow+PK
PX.CS	RMRow+FK+DataSource
PX.CS	RMRow+FK+RowSet
PX.CS	RMRowSet+PK
PX.CS	RMStyle+PK
PX.CS	RMUnit+PK
PX.CS	RMUnit+FK+UnitSet
PX.CS	RMUnit+FK+ParentUnitSet

Namespace	Key
PX.CS	RMUnit+FK+DataSource
PX.CS	RMUnitSet+PK
PX.Api	SYMapping+FK+SiteMap
PX.Api	SYMapping+FK+PortalMap
PX.Api	SYMapping+FK+Provider
PX.Api	SYMapping+FK+Locale
PX.Api	SYProvider+PK
PX.Api	SYProviderObject+PK
PX.Api	SYProviderObject+FK+Provider
PX.SM	SMPerformanceInfoSQLWithTables+PK
PX.SM	SMPerformanceInfoTraceWithMessages+PK
PX.SM	SMPerformanceInfoSQL+PK
PX.SM	SMPerformanceInfoSQL+FK+PerformanceInfo
PX.SM	SMPerformanceInfoSQLText+PK
PX.SM	SMPerformanceInfoStackTrace+PK
PX.SM	SMPerformanceInfoTraceEvents+PK
PX.SM	SMPerformanceInfoTraceEvents+FK+PerformanceInfoTraceMessages
PX.SM	SMPerformanceInfoTraceEvents+FK+PerformanceInfoStackTrace
PX.SM	SMPerformanceInfoTraceEvents+FK+PerformanceInfo

Namespace	Key
PX.SM	SMPerformanceInfoTraceMessages+PK
PX.SM	SMPerformanceInfo+PK
PX.SM	Graph+PK
PX.SM	UserPreferences+PK
PX.SM	UserPreferences+FK+DefaultBranch
PX.SM	UserPreferences+FK+DefaultPrinter
PX.SM	UserPreferences+FK+DefaultScale
PX.SM	UserPreferences+FK+DefaultScanner
PX.SM	UserPreferences+FK+Certificate
PX.SM	UserPreferences+FK+User
PX.SM	Branch+PK
PX.SM	RoleActiveDirectory+PK
PX.SM	RoleActiveDirectory+FK+Role
PX.SM	RoleActiveDirectory+FK+ActiveDirectoryGroup
PX.SM	RoleClaims+PK
PX.SM	RoleClaims+FK+Role
PX.SM	RoleClaims+FK+ActiveDirectoryGroup
PX.SM	ActiveDirectoryGroup+PK
PX.SM	Certificate+PK

Namespace	Key
PX.SM	LoginTrace+PK
PX.SM	LoginTrace+FK+User
PX.SM	LoginTrace+FK+SiteMap
PX.SM	LoginTrace+FK+PortalMap
PX.SM	RelationHeader+PK
PX.SM	RelationHeader+FK+SpecificType
PX.SM	RelationHeader+FK+EntityType
PX.SM	RelationHeader+FK+SpecificModule
PX.SM	MaskedType+PK
PX.SM	RelationDetail+PK
PX.SM	RelationDetail+FK+SpecificType
PX.SM	RelationDetail+FK+SpecificModule
PX.SM	RelationGroup+PK
PX.SM	RelationGroup+FK+MaskedType
PX.SM	RelationGroup+FK+Graph
PX.SM	Roles+PK
PX.SM	Roles+UK
PX.SM	RolesInCache+PK
PX.SM	RolesInCache+FK+Role

Namespace	Key
PX.SM	RolesInCache+FK+SiteMap
PX.SM	RolesInCache+FK+PortalMap
PX.SM	RolesInGraph+PK
PX.SM	RolesInGraph+FK+Role
PX.SM	RolesInGraph+FK+SiteMap
PX.SM	RolesInGraph+FK+PortalMap
PX.SM	RolesInMember+PK
PX.SM	RolesInMember+FK+Role
PX.SM	RolesInMember+FK+SiteMap
PX.SM	RolesInMember+FK+PortalMap
PX.SM	DateInfo+PK
PX.SM	EMailAccount+FK+ResponseNotification
PX.SM	EMailAccount+FK+ConfirmReceiptNotification
PX.SM	EMailAccount+FK+DefaultWorkgroup
PX.SM	EMailAccount+FK+DefaultOwner
PX.SM	Locale+PK
PX.SM	LocaleFormat+PK
PX.SM	LocaleFormat+FK+Locale
PX.SM	LocaleFormat+FK+DateTimePattern

Namespace	Key
PX.SM	LocaleFormat+FK+TimeShortPattern
PX.SM	LocaleFormat+FK+TimeLongPattern
PX.SM	LocaleFormat+FK+DateShortPattern
PX.SM	LocaleFormat+FK+DateLongPattern
PX.SM	StandartDateTimeFormat+PK
PX.SM	MobileSiteMap+PK
PX.SM	Notification+FK+EMailAccount
PX.SM	Notification+FK+Locale
PX.SM	NotificationReport+PK
PX.SM	NotificationReport+FK+Notification
PX.SM	NotificationReport+FK+SiteMap
PX.SM	NotificationReport+FK+PortalMap
PX.SM	NotificationReportParameter+PK
PX.SM	NotificationReportParameter+FK+NotificationReport
PX.SM	PortalMap+PK
PX.SM	PortalMap+UK
PX.SM	Users+UK
PX.SM	UsersInRoles+PK
PX.SM	UsersInRoles+FK+User

Namespace	Key
PX.SM	UsersInRoles+FK+Role
PX.SM	AUReportLink+PK
PX.SM	AUReportLink+FK+SiteMap
PX.SM	AUReportLink+FK+PortalMap
PX.SM	AUReportLink+FK+User
PX.SM	AUReportLink+FK+Schedule
PX.SM	AUReportLink+FK+ScheduleFilter
PX.SM	AUReportLink+FK+ScheduleFill
PX.SM	AUSchedule+PK
PX.SM	AUSchedule+FK+SiteMap
PX.SM	AUSchedule+FK+PortalMap
PX.SM	AUSchedule+FK+Branch
PX.SM	AUScheduleFill+PK
PX.SM	AUScheduleFill+FK+SiteMap
PX.SM	AUScheduleFill+FK+PortalMap
PX.SM	AUScheduleFill+FK+Schedule
PX.SM	AUScheduleFilter+PK
PX.SM	AUScheduleFilter+FK+SiteMap
PX.SM	AUScheduleFilter+FK+PortalMap

Namespace	Key
PX.SM	AUScheduleFilter+FK+Schedule
PX.SM	UPCompany+PK
PX.SM	UPCompany+FK+Company
PX.SM	UPSnapshot+PK
PX.SM	UPSnapshot+FK+SourceCompany
PX.SM	UPSnapshotHistory+PK
PX.SM	UPSnapshotHistory+FK+Snapshot
PX.Data.Maintenance.GI	GIRecordDefault+PK
PX.Data.Maintenance.GI	GIRecordDefault+FK+Design
PX.Data.Maintenance.GI	GIRelation+PK
PX.Data.Maintenance.GI	GIRelation+FK+Design
PX.Data.Maintenance.GI	GIWhere+PK
PX.Data.Maintenance.GI	GIWhere+FK+Design
PX.Data.Maintenance.GI	GION+PK
PX.Data.Maintenance.GI	GION+FK+Design
PX.Data.Maintenance.GI	GION+FK+Relation
PX.Data.Maintenance.GI	GIResult+PK
PX.Data.Maintenance.GI	GIResult+FK+Design
PX.Data.Maintenance.GI	GISort+PK

Namespace	Key
PX.Data.Maintenance.GI	GISort+FK+Design
PX.Data.Maintenance.GI	GI Table+PK
PX.Data.Maintenance.GI	GI Table+FK+Design
PX.Objects.SO	POSupplyLine+PK
PX.Objects.SO	POSupplyLine+FK+SupplyOrder
PX.Objects.SO	POSupplyOrder+PK
PX.Objects.SO	POSupplyOrder+FK+DemandOrder
PX.Objects.SO	SOLineSplit+FK+SupplyLine
PX.Objects.SO	SOOrder+FK+Contact
PX.Objects.SO	SOOrder+FK+IntercompanyPOOrder
PX.Objects.SO	SOOrder+FK+IntercompanyPOReturn
PX.Objects.PR.Standalone	PREmployee+PK
PX.Objects.PR.Standalone	PREmployee+FK+EmployeeClass
PX.Objects.PR.Standalone	PREmployee+FK+WorkCode
PX.Objects.PR.Standalone	PREmployeeClass+PK
PX.Objects.PR.Standalone	PREmployeeClass+FK+WorkCode
PX.Objects.PO	POOrder+FK+SODemandOrder
PX.Objects.PO	POReceipt+FK+IntercompanyShipment
PX.Objects.PO	SODemandOrder+PK

Namespace	Key
PX.Objects.PO	POOrderEntry+POOrderR+PK
PX.Objects.PO	POLineR+FK+OrderR
PX.Objects.PO	POLineUOpen+FK+BlanketOrder
PX.Objects.PO	POLineUOpen+FK+BlanketOrderLine
PX.Objects.PM	PMWorkCodeCostCodeRange+PK
PX.Objects.PM	PMWorkCodeCostCodeRange+FK+WorkCode
PX.Objects.PM	PMWorkCodeCostCodeRange+FK+CostCodeFrom
PX.Objects.PM	PMWorkCodeCostCodeRange+FK+CostCodeTo
PX.Objects.PM	PMWorkCodeLaborItemSource+PK
PX.Objects.PM	PMWorkCodeLaborItemSource+FK+WorkCode
PX.Objects.PM	PMWorkCodeLaborItemSource+FK+LaborItem
PX.Objects.PM	PMWorkCodeProjectTaskSource+PK
PX.Objects.PM	PMWorkCodeProjectTaskSource+FK+WorkCode
PX.Objects.PM	PMWorkCodeProjectTaskSource+FK+Project
PX.Objects.PM	PMWorkCodeProjectTaskSource+FK+ProjectTask
PX.Objects.IN	INItemBoxEx+PK
PX.Objects.IN	INItemBoxEx+FK+InventoryItem
PX.Objects.IN	INItemBoxEx+FK+CSBox
PX.Objects.IN	InventoryItemCurySettings+PK

Namespace	Key
PX.Objects.IN	InventoryItemCurySettings+FK+Inventory
PX.Objects.IN	InventoryItemCurySettings+FK+Currency
PX.Objects.IN	INSiteStatusSummary+PK
PX.Objects.IN	INSiteStatusSummary+FK+InventoryItem
PX.Objects.IN	INSiteStatusSummary+FK+Site
PX.Objects.IN	INSiteStatusSummary+FK+ItemSite
PX.Objects.IN.Matrix.DAC	INMatrixExcludedData+PK
PX.Objects.IN.Matrix.DAC	INMatrixExcludedData+FK+TemplateInventoryItem
PX.Objects.IN.Matrix.DAC	INMatrixGenerationRule+FK+ItemClass
PX.Objects.IN.Matrix.DAC.Projections	DescriptionGenerationRule+FK+ItemClass
PX.Objects.IN.Matrix.DAC.Projections	ExcludedAttribute+PK
PX.Objects.IN.Matrix.DAC.Projections	ExcludedField+PK
PX.Objects.IN.Matrix.DAC.Projections	IDGenerationRule+FK+ItemClass
PX.Objects.CT	Contract+FK+DefaultSaleAccount
PX.Objects.CT	Contract+FK+DefaultSalesSubaccount
PX.Objects.CT	Contract+FK+DefaultExpenseAccount
PX.Objects.CT	Contract+FK+DefaultExpenseSubaccount
PX.Objects.CS	CSAttributeDetail+FK+Attribute
PX.Objects.CN.Compliance.PM.DAC	LienWaiverRecipient+PK

Namespace	Key
PX.Objects.CN.Compliance.PM.DAC	LienWaiverRecipient+FK+Project
PX.Objects.CN.Compliance.PM.DAC	LienWaiverRecipient+FK+VendorClass
PX.Objects.CA	CCBatch+PK
PX.Objects.CA	CCBatch+FK+Currency
PX.Objects.CA	CCBatch+FK+CADeposit
PX.Objects.CA	CCBatch+FK+CCProcessingCenter
PX.Objects.CA	CCBatchStatistics+PK
PX.Objects.CA	CCBatchStatistics+FK+CCBatch
PX.Objects.CA	CCBatchTransaction+PK
PX.Objects.CA	CCBatchTransaction+FK+CCBatch
PX.Objects.CA	CCBatchTransaction+FK+ARPayment
PX.Objects.CA	CCBatchTransaction+FK+ExternalTransaction
PX.Objects.CA	CCProcessingCenterFeeType+PK
PX.Objects.CA	CCProcessingCenterFeeType+FK+ProcessingCenter
PX.Objects.CA	CCProcessingCenterFeeType+FK+EntryType
PX.Objects.Common.DAC	DropShipLink+PK
PX.Objects.Common.DAC	DropShipLink+FK+POLine
PX.Objects.Common.DAC	DropShipLink+FK+POOrder
PX.Objects.Common.DAC	DropShipLink+FK+POSupplyLine

Namespace	Key
PX.Objects.Common.DAC	DropShipLink+FK+POSupplyOrder
PX.Objects.Common.DAC	DropShipLink+FK+SOLine
PX.Objects.Common.DAC	DropShipLink+FK+SODemandOrder
PX.Objects.AP	APDiscountLocation+FK+VendorDiscountSequence
PX.Objects.FS	FSAppointmentStatusColor+PK
PX.Objects.FS	FSARTran+PK
PX.Objects.FS	FSARTran+FK+Appointment
PX.Objects.FS	FSARTran+FK+ServiceOrder
PX.Objects.FS	FSARTran+FK+ServiceOrderLine
PX.Objects.FS	FSARTran+FK+AppointmentLine
PX.Objects.FS	FSARTran+FK+ServiceContract
PX.Objects.FS	FSARTran+FK+ARTranLine
PX.Objects.FS	FSBillHistory+PK
PX.Objects.FS	FSBillHistory+UK
PX.Objects.FS	FSBillHistory+FK+Appointment
PX.Objects.FS	FSBillHistory+FK+ServiceOrder
PX.Objects.FS	FSBillHistory+FK+ServiceContract
PX.Objects.AM	SelectedProdMatl+PK
PX.Objects.AM	SelectedProdMatl+FK+Operation

Namespace	Key
PX.Objects.AM	SelectedProdMatl+FK+ProductionOrder
PX.Objects.AM	AMDisassembleTran+PK
PX.Objects.AM	AMDisassembleTranSplit+PK
PX.Objects.AM	AMDisassembleTranSplit+FK+DisassembleTransaction
PX.Objects.PR	PRPaymentBatchExportDetails+PK
PX.Objects.PR	PRPaymentBatchExportDetails+FK+PRPaymentBatchExportHistory
PX.Objects.PR	PRPaymentBatchExportDetails+FK+PRPayment
PX.Objects.PR	PRPaymentBatchExportDetails+FK+CABatch
PX.Objects.PR	PRPaymentBatchExportHistory+PK
PX.Objects.PR	PRPaymentBatchExportHistory+FK+CABatch
PX.Objects.PR	PRTaxSettingAdditionalInformation+PK